




2W LED Emergency Non Maintained Downlight

- Selectable Self Test or Manual Emergency Mode
- Surface or recessed mount
- 4 in 1 product
- Suitable for open area or corridor
- Dual colour charge indicator, complete with driver and battery pack
- IP20



Product Warranty ¹ Including Battery	Water & Dust Protected	Self Test or Manual Emergency Mode	Operating Hours
5 Year	IP20		50,000

Technical Specification	
Construction	Polycarbonate
LED Chip	Samsung
Input Voltage	220 - 240V
Power Factor	> 0.9
Operating Temp	0°C to +35°C
Standard	CE & UKCA
Battery	LiFePO4

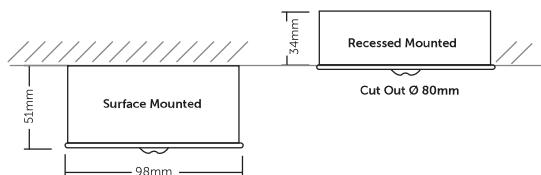

technical@belllighting.co.uk
sales@belllighting.co.uk

**5 Year Silver Warranty**

Code	W	Description	Temp	Lm	ØxHxCut Out
09126	2	LED Emergency Non Maintained Downlight (Surface mounted/Recessed)	6000K	150	98x51x80