Pulse Wireless Sensors SY2495
Instruction Leaflet


Thank you for purchasing this Sycamore Lighting product.

Please make sure instructions are followed carefully prior to and during installation and product is not altered, otherwise warranty may not be valid.
For technical support or warranty information please visit www.sycamoreLED.com or call our dedicated technical helpline +44 (0) 113 2866686.


IMPORTANT – Please read prior to installation

1. Please read these instructions carefully before commencing any work
2. Please retain these instructions for future reference
3. This unit must be installed by a qualified electrician in accordance with the IEE wiring regulations and building regulations
4. To prevent electrocution, switch the power off at the mains supply before installing or maintaining this fitting
5. Ensure others cannot restore the electrical supply without your knowledge

WIRELESS SWITCH




RECESS MOUNTING FRAME

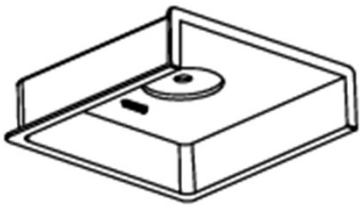







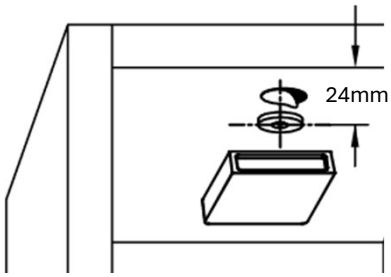


Clean the surface & fix the magnet piece onto the cabinet using the self-adhesive pad.

Surface Installation – single door

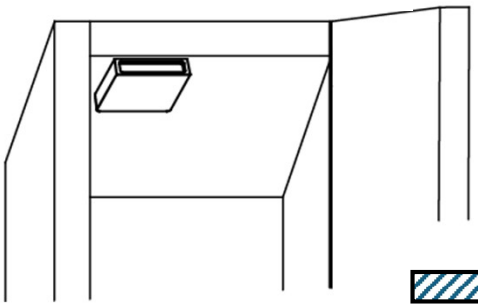





Surface Installation – double door
Place the switch in the centre

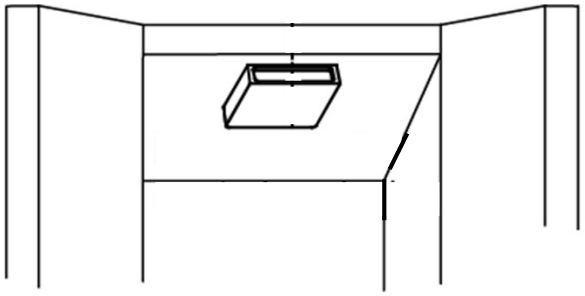

Recessed Installation

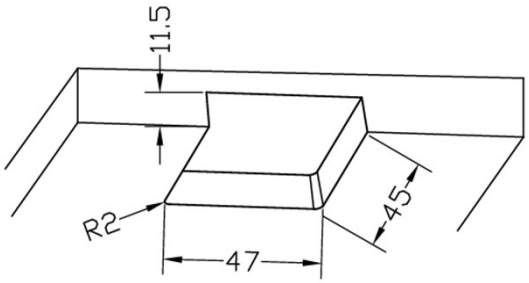


Cut a slot that the sensor can sit in

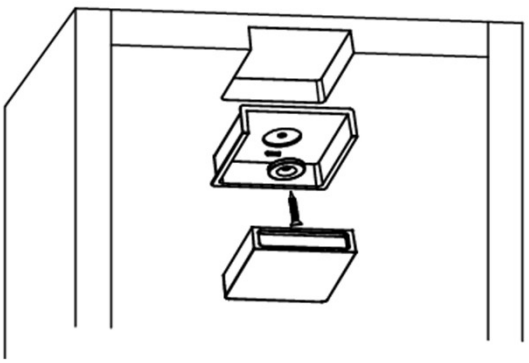


Use the screw & magnetic piece to fix the recess mounting frame in place.

Recessed single door




Recessed double door

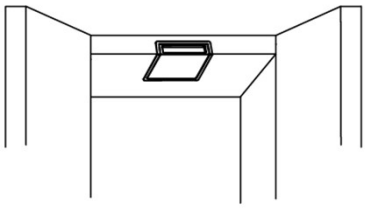


SYCAMORE


Pulse Wireless Sensors SY2495
Instruction Leaflet




pairing button

Sensor ON/OFF switch

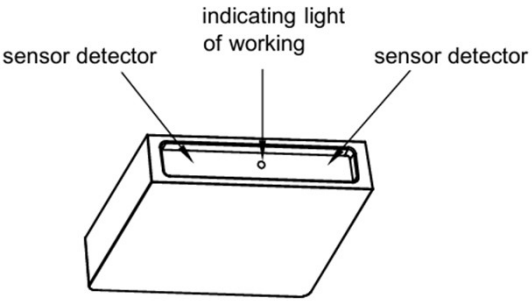



Pairing....
Turn the sensor on
Power up the driver & press the pairing button on the receiver
The light will flash once
Press the pairing button on the switch within 3 seconds.
The light will flash 3 times indicating the link has been made.

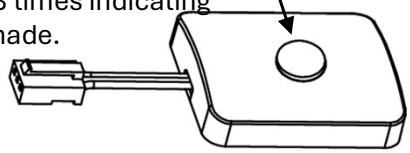

To unpair....
Turn the sensor on
Power up the driver & press the pairing button on the receiver
The light will flash once
Press & hold for min 3 seconds the pairing button on the switch within 3 seconds.
The light will flash 3 times indicating it has been unpaired.


One receiver can be paired with multiple switches
One switch can be paired with up to 7 receivers




Wireless receiver SY2495-REC

Receiver pair button

SY9495PIR
Press & hold this button to dim the lights up/down

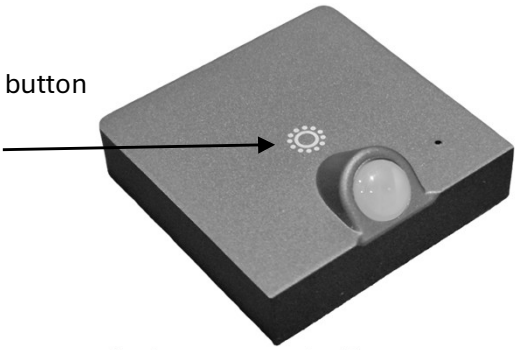

Pulse drivers
SY2498-8 8w
SY2498-15 15w
SY2498-30 30w
SY2498-60 60w

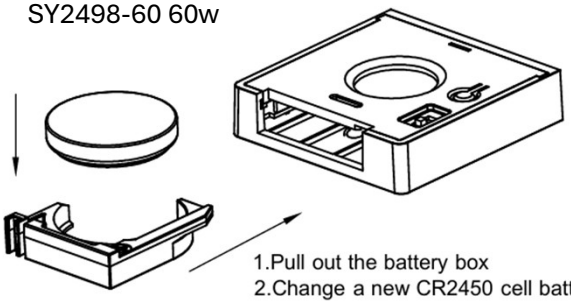

1.Pull out the battery box
2.Change a new CR2450 cell battery

Switches...

SY2495PIR	Detects human body movement with a range of 1 to 3m. 45 second delay to off.
SY2495D	Door sensor used for single or double doors
SY2495T	Touch sensor short press >0.5sec on/off Long press <0.5sec dim 10%-100%
SY2495HW	Swipe sensor. Move your hand across the sensor within 3-6cm for on/off. Hold your hand over the sensor 1 sec to dim 10%-100%

Receiver...

SY2495-REC	Connect to the side port on the Pulse driver

CARE IN USE

1. Please note this fitting has non replaceable parts
2. Always switch off or disconnect from the mains when cleaning the product.
3. We recommend cleaning with a soft dry cloth. Do not use scourers, abrasives or chemical cleaners.
4. Do not allow moisture to come into contact with electrical parts.
5. This luminaire should not be disposed of with normal household waste. When a replacement is purchased, this luminaire should be returned to the retailer to safely dispose of (WEEE Directive effective July 2006—Waste from Electrical & Electronic Equipment)

This product contains a source of energy efficiency class F

Sycamore Lighting Ltd, Unit 5A, Helios 47, 3 Isabella Road, Garforth, Leeds, LS25 2DY Tel: +44 (0)113 286 6686 sales@sycamoreLED.com