

Emergency Range

Installation instructions for JC50322 3W Emergency Self Test Exit Box




Warnings & Cautions

- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or servicing the product.
- It is recommended that luminaires are installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations; which will void the warranty.
- This product is designed for connection to a 220-240V~ 50/60Hz.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- This product is suitable for indoor use only.
- It is recommended that the ambient room temperature should not exceed 30°C.
- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly. Isolate power supply before starting installation.
- Do not carry out insulation tests with the product connected to the circuit.

INSTALLATION

ENGLISH

3W 220-240V~ 50/60Hz - Class II (with earth provision)
Colour temp: 6000K Ra: 72

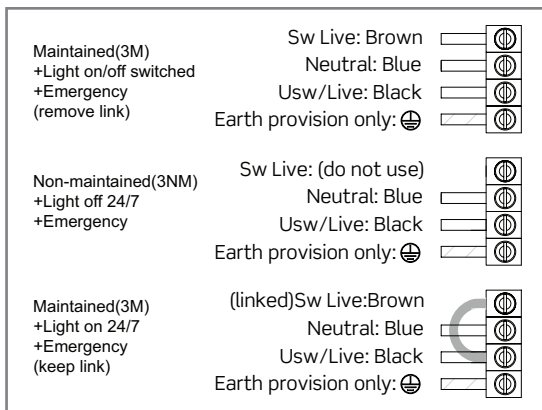

Installation procedure

- To open, remove the screw on the end of the fitting and partially slide the front cover out of the body, then ease out the top from the body.
- Disconnect the LED lead on the front cover from the circuit board.
- Use the back plate as a template to mark for holes to secure the fitting, ensuring suitable fixings are used for the intended location.
- Connect the mains input supply as indicated in figure 1 for the required operation.
- Connect the emergency battery leads to the circuit board (right hand side of the circuit board).
- Reconnect the LED lead on the front cover (next to the battery connection).
- Refit the body to the base by aligning the bottom of the front cover, then clip the top in place. Slide the front into position and refit the retaining screw.
- Switch on mains supply and test for operation (allow 24hrs for batteries to charge).
- Familiarise yourself with the enclosed emergency fittings test record sheet and ensure it is completed as required.


Function test

- With mains supply and green indicator light on, press the Test Button to check function.
- Green indicator light will go off and the fitting will operate in emergency mode.
- Release the button and the indicator light will come on and the fitting will then return to previous operation.




CE UK RoHS CA Compliant IP20 jcc.co.uk

Legends

To change the legend, remove the front as described in points 1 and 2 above. Remove the light guide board from the front cover. Replace the legend with the required legend. Refit the light guide board and refit to base as per points 6 and 7.

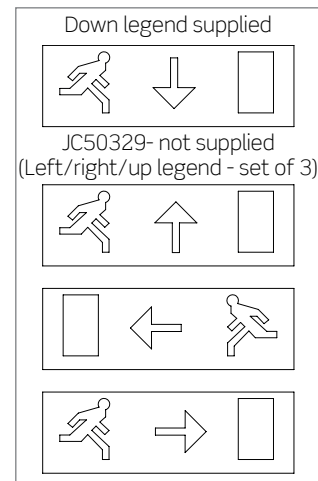

Profile & Dimensions

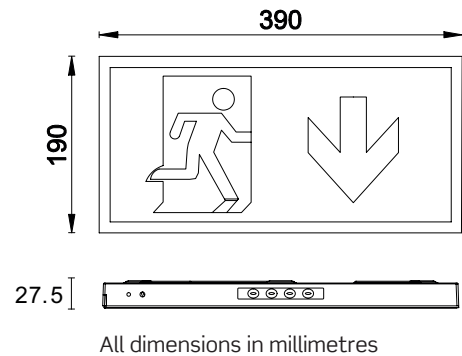

Important warranty information

This product is supported by a 2-year standard warranty which will extend to 3 years if registered within the first year of purchase. (2 year on batteries). Please register at jcc.co.uk/warranty - Terms and conditions apply.

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis:
Product Code/Date Code.

BS EN ISO9001 - 2015 - Registered Firm Certificate No. GB 1552
JCC Lighting Products Ltd. Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT
Technical Support: +44(0)1243 838986 Customer Services: +44(0)1243 838999

V5_August_2023_RS

