

## LED Wattage Switchable CCT Surface/Suspended Linear



- Selectable settings - 2 Power select & 3 CCT (3000k / 4000k / 5000k select)
- Ideal for general offices, commercial spaces and open areas
- Versatile Mounting - both surface & suspended mounting versions available
- Tailored Light distribution - Downward only or Up-Down (75:25) light options available
- Flexible Lighting layout - Standalone or Linkable (with and without link section)
- DALI Dimming, Emergency & CASAMBI options available
- UGR < 19 option available with downward light on demand
- Ease of Installation - Loop-In Loop-out



Quality Assured Product Warranty <sup>3</sup>	On site Warranty <sup>3</sup>	Colour Rendering Index <sup>2</sup>	Lumens Maintenance Ratio <sup>2</sup>	Water & Dust Protected	Flicker Free	Operating Hours
<b>7 Year</b>	<b>2 Year</b>	<b>85</b>	<b>L80 B10</b>	<b>IP20</b>	<b>Driver</b>	<b>50,000</b>

Technical Specification	
Construction	Steel + Polycarbonate
Driver	BELL
Operating Frequency	50/60Hz
Input Voltage	220 - 240VAC
Power Factor	> 0.9
Operating Temp	-20°C to + 45°C
Standard	CE & UKCA

Configurations when using Link Section for Continuous Mount  
(code 70108) Sold separately

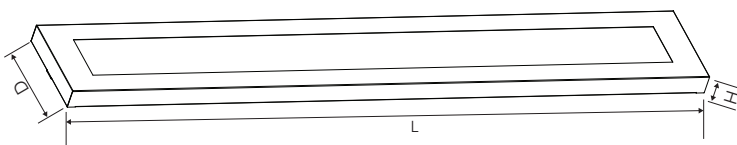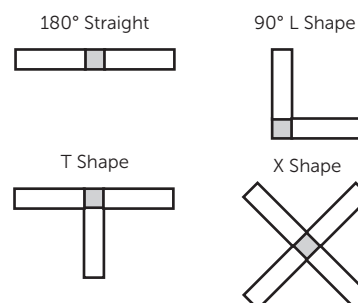



## 7 Year Gold Warranty

Code	W	Description	Lm	Temp	LxDxH (mm)
70100	17/30	Surface Linear 100% Down - CCT, 1200mm (4ft) - Includes Suspension and Surface Mount Kit	3300-3600	3/4/6000K	1274x186x37
70101	17/30	Surface Linear 100% Down - CCT, 1200mm (4ft), Emergency - Includes Suspension and Surface Mount Kit	3300-3600	3/4/6000K	1274x186x37
70102	17/30	Surface Linear 75% Down 25% Up - CCT, 1200mm (4ft) - Includes Suspension and Surface Mount Kit	3300-3600	3/4/6000K	1274x186x37
70103	17/30	Surface Linear 75% Down 25% Up - CCT, 1200mm (4ft), Emergency - Includes Suspension and Surface Mount Kit	3300-3600	3/4/6000K	1274x186x37
70104	22/40	Surface Linear 100% Down - CCT, 1500mm (5ft) - Includes Suspension and Surface Mount Kit	4400-4800	3/4/6000K	1574x186x37
70105	22/40	Surface Linear 100% Down - CCT, 1500mm (5ft), Emergency - Includes Suspension and Surface Mount Kit	4400-4800	3/4/6000K	1574x186x37
70106	22/40	Surface Linear 75% Down 25% Up - CCT, 1500mm (5ft) - Includes Suspension and Surface Mount Kit	4400-4800	3/4/6000K	1574x186x37
70107	22/40	Surface Linear 75% Down 25% Up - CCT, 1500mm (5ft), Emergency - Includes Suspension and Surface Mount Kit	4400-4800	3/4/6000K	1574x186x37
70108	-	Link Section for Continuous Mount	-	-	-

**Note:** BELL Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and BELL lighting may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, BELL Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.