




Wattage Switchable CCT Vandal Resistant Anti Ligature LED Batten & Cornice Batten

- Designed with safety as a priority
- Prevents accidents, misuse, weaponisation or the use in self-harm
- Surface mount
- Vandal resistant screws in a steel frame
- Perfect for public areas, subways, prisons and car parks



Quality Assured Product Warranty ³ 10 Year	On site Warranty ³ 2 Year	Battery Warranty ³ Emergency Versions 5 Year	Colour Rendering Index ³ 85	Lumens Maintenance Ratio ³ L80 B10	Water & Dust Protected IP65	Impact Rating IK10	Operating Hours 100,000
---	--	---	--	---	---------------------------------------	------------------------------	-----------------------------------

Technical Specification	
Construction	Steel + Polycarbonate
Driver	BELL
LED Chip	Samsung
Input Voltage	220 - 240V
Power Factor	> 0.9
Operating Temp	-30°C to +35°C / Emergency version min temp -5°C
Standard	CE & UKCA

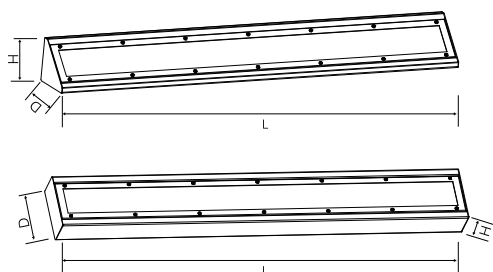

technical@belllighting.co.uk
sales@belllighting.co.uk

10 Year Gold Warranty

Code	W	Description	Lm	Temp	LxHxD (mm)
70170	25/35/45/55/60	Ultra Endure - White, 1200mm (4ft)	3120-7150	3/4/6000K	1200x78x106
70171	25/35/45/55/60	Ultra Endure - White, Emergency 1200mm (4ft)	3120-7150	3/4/6000K	1200x78x106
70172	60	Ultra Endure - White, Dali 1200mm (4ft)	7150	3/4/6000K	1200x78x106
70173	60	Ultra Endure - White, Emergency Dali 1200mm (4ft)	7150	3/4/6000K	1200x78x106
70174	25/35/45/55/60	Ultra Endure - White, 1500mm (5ft)	3120-7150	3/4/6000K	1500x78x106
70175	25/35/45/55/60	Ultra Endure - White, Emergency 1500mm (5ft)	3120-7150	3/4/6000K	1500x78x106
70176	60	Ultra Endure - White, Dali 1500mm (5ft)	7150	3/4/6000K	1500x78x106
70177	60	Ultra Endure - White, Emergency Dali 1500mm (5ft)	7150	3/4/6000K	1500x78x106
70178	25/35/45/55/60	Ultra Endure Cornice - White, 1200mm (4ft)	3120-7150	3/4/6000K	1200x167x120
70179	25/35/45/55/60	Ultra Endure Cornice - White, Emergency 1200mm (4ft)	3120-7150	3/4/6000K	1200x167x120
70180	60	Ultra Endure Cornice - White, Dali 1200mm (4ft)	7150	3/4/6000K	1200x167x120
70181	60	Ultra Endure Cornice - White, Emergency Dali 1200mm (4ft)	7150	3/4/6000K	1200x167x120
70182	25/35/45/55/60	Ultra Endure Cornice - White, 1500mm (5ft)	3120-7150	3/4/6000K	1500x167x120
70183	25/35/45/55/60	Ultra Endure Cornice - White, Emergency 1500mm (5ft)	3120-7150	3/4/6000K	1500x167x120
70184	60	Ultra Endure Cornice - White, Dali 1500mm (5ft)	7150	3/4/6000K	1500x167x120
70185	60	Ultra Endure Cornice - White, Emergency Dali 1500mm (5ft)	7150	3/4/6000K	1500x167x120
70186	25/35/45/55/60	Ultra Endure Cornice - Black, 1200mm (4ft)	3120-7150	3/4/6000K	1200x167x120
70187	25/35/45/55/60	Ultra Endure Cornice - Black, Emergency 1200mm (4ft)	3120-7150	3/4/6000K	1200x167x120
70188	60	Ultra Endure Cornice - Black, Dali 1200mm (4ft)	7150	3/4/6000K	1200x167x120
70189	60	Ultra Endure Cornice - Black, Emergency Dali 1200mm (4ft)	7150	3/4/6000K	1200x167x120
70190	25/35/45/55/60	Ultra Endure Cornice - Black, 1500mm (5ft)	3120-7150	3/4/6000K	1500x167x120
70191	25/35/45/55/60	Ultra Endure Cornice - Black, Emergency 1500mm (5ft)	3120-7150	3/4/6000K	1500x167x120
70192	60	Ultra Endure Cornice - Black, Dali 1500mm (5ft)	7150	3/4/6000K	1500x167x120
70193	60	Ultra Endure Cornice - Black, Emergency Dali 1500mm (5ft)	7150	3/4/6000K	1500x167x120

*Lumens based on 4000K