

skylineprojector

Wattage Switchable 30°/60° Symmetric LED Floodlight

- Ideal for golf driving ranges
- Marine Grade
- High mast lighting
- IP66 & IK8 Protection
- Up to 182 l/W
- Versatile mounting bracket
- Optional shields to reduce light spill
- CASAMBI & DALI options available



CASAMBI



Quality Assured
Product Warranty¹
10 Year

On site
Warranty²
2 Year

Colour Rendering
Index³
70

Lumens
Maintenance Ratio⁴
L80 B10


Water & Dust
Protected
IP66

Surge
Protected
10000V

Impact
Rating
IK8

Operating
Hours
70,000

Technical Specification	
Construction	Cast Aluminium - RAL 870 Silver
Driver	BELL 0-10V Dimmable
LED Chip	Osram
Input Voltage	200-240
Power Factor	> 0.9
Operating Temp	-30°C - +50°C
Standard	CE & UKCA

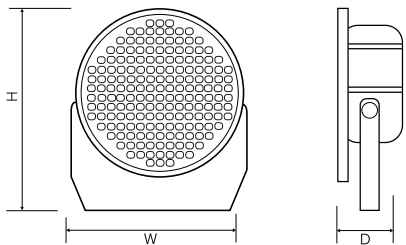

technical@belllighting.co.uk
sales@belllighting.co.uk



10 Year Gold Warranty

Code	W	Description	Lumens (Up to)	Temp	Lm /W (up to)	Weight Inc/exc Driver	Windage	WxHxD (mm)
70250	400/500/600	Skyline Projector Wattage Switchable 30° Symetric Floodlight	72,569-103,670	5700K	181	12.96 Kg 8.81 Kg	0.174 m ² @ 60°	490x426x291
70251	400/500/600	Skyline Projector Wattage Switchable 60° Symetric Floodlight	72,625-103,750	5700K	182	12.96 Kg 8.81 Kg	0.174 m ² @ 60°	490x426x291
70252	600/780/1200	Skyline Projector 30° Symetric Floodlight -	107,500-204,900	5700K	179	28.88 Kg 17.6 Kg	0.228 m ² @ 60°	581x648x332
70253	600/780/1200	Skyline Projector 60° Symetric Floodlight -	107,600-205,100	5700K	179	28.88 Kg 17.6 Kg	0.228 m ² @ 60°	581x648x332
70258	-	Visor for 600W Skyline Projector	-	-	-	2.35 Kg	-	-
70259	-	Visor for 1200W Skyline Projector	-	-	-	2.35 Kg	-	-