



Foxbridgesensor

IP20 2 in 1 Recessed/Surface Mount Microwave Sensor with Life Presence Detection

- Suitable for all movement detection: Large (walking), Medium (waving of hands) & Small (head movement)
- Adjustable ambient time delay & sensitivity settings
- Seamless recessed fitting ceiling design
- Slim profile, unobtrusive design
- Dip Switch controls for precise settings





Cut Out Ø76mm (Recessed Mount)

Surface Mount



Recessed Mount

Installation Height: 2.2m-4m

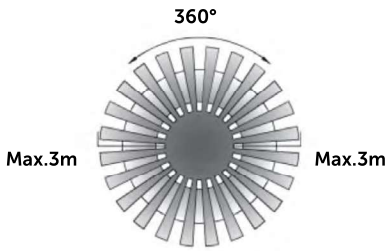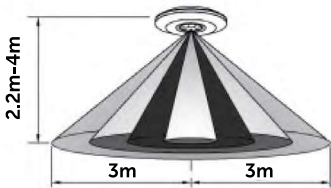

Detection Distance: Max. 6m

5 Year Silver Warranty		
Code	Description	DxØ (mm)
70400	IP20 2 in 1 Recessed/Surface Mount Microwave Sensor with Life Presence Detection	35.5x93

Quality Assured
Product Warranty³
5 Year

Water & Dust
Protected
IP20

Sensing
Microwave

Mounting
Options
Recessed/Surface

Technical Specification	
Construction	Polycarbonate Flame Retardant Body
Input Voltage	200-220 VAC
Frequency	50/60 Hz
Operating Temp	-20°C to +40°C
Load Capacity	LED 1000W Halogen 2000W
Time Delay	10seconds, 1 minute, 5 minutes, 15 minutes
Ambient Settings	10lux, 30lux, 100lux, Disabled
Protection Class	Class II
Compliance	EN 60669-2-1
Standard	LVD directive 2014/35/EU EMC directive 2014/30/EU

Note: BELL Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and BELL lighting may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, BELL Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.