



**READ THESE INSTRUCTIONS THOROUGHLY BEFORE INSTALLATION KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

**IMPORTANT:**  
This product must be installed by a qualified electrician or competent person, and in accordance with current building and IET wiring regulations.

**BOX CONTENTS**

This lighting fixture has been properly packed to avoid damage during transit. Before commencing with the installation carefully inspect the luminaire to confirm there is no damage. **DO NOT INSTALL** if any damage has occurred to the fixture or any of its components:

- Light Fitting
- Instruction Manual
- Loch3 Connector

**TOOLS REQUIRED**



- Cable

**INSTALLATION INSTRUCTIONS**

**1**

**Loch3 Quick Connector**

**Electrical connection wiring**

LIVE (L) = Brown

Earth (⊕) = Yellow/Green

NEUTRAL (N) = Blue

**2**

**6 pin push and lock Connector**

**CAUTION**  
Do not hot plug when live.

**3**

**4**

**truSmart intelligent controls**

All apps are available from the Apple App Store for iOS and Google Play Store for Android.

**PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLATION.**



**WARNING: Risk of electric shock! Isolate the mains power before proceeding.**

- Turn off the mains power before performing inspections, installation, or removal
- Verify that the supply voltage is correct by comparing it with the luminaire label information
- It is the installers responsibility to ensure installation is suitable for the total load of the luminaire(s). The supply cable, fuses/circuit breakers must be correctly rated for the electrical load and considering for any transient inrush currents that may occur
- Do not perform insulation strength or resistance tests on installed luminaire(s) connected

1. Isolate the circuit, connect mains cable to the Loch3 Quick Connector as per diagram
2. Make sure the LED driver is connected to the panel and securely locked
3. Fit the panel into desired location and then re-connect to the mains supply
4. Using your smart device, download the truSmart App and open the software. Refer to the 'Quick User Guide' for simple set-up instructions

## DISPOSAL

The light source of this unit is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.

Disassemble instructions for end of life disposal available on website.

Disposal of Electronic Equipment WEEE Directive 2002/96/EC This product falls within the scope of the Waste Electrical & Electronic Equipment Directive (WEEE), which means the product should not be disposed of as normal household waste. Please recycle where facilities exist or check with your Local Authority. RoHS - All components and materials used in this product are RoHS 2002/95/EC compliant.

Specifications may change from time to time. The information contained in this leaflet is for guidance only and should not be considered as always accurate and should be treated as not representative.

## WARRANTY


**This luminaire is warranted for a period of 5 years from the date of purchase\*\*.** The warranty could be invalidated should the light fitting not be installed according to these instructions, outside the scope of the specification or the product has been altered or tampered with in any way. Please see website for terms and conditions.

## PRODUCT TEMP SPECIFICATION

Standard 0 to +40°C

## TRUSMART SNOWDON BACKLIT PANEL DIMENSIONS

Part No.	Description	Watts	L (mm)	W (mm)	H (mm)	Weight
440000	truSmart Snowdon Panel 600 x 600 Backlit TP (a) - 4000K White	30W	595	595	32	2.0Kg

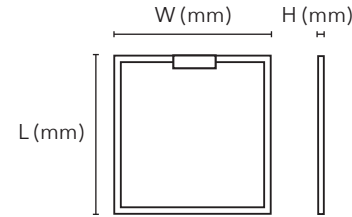

Installation Engineers Contact Details:		Luminaire Reference / Location
Name:	Tel:	

This product contains a light source of energy efficiency Class D.