BELLlighting

LED T8 CCT Wattage Switchable Tubes

- Designed to replace conventional fluorescent tubes
- Cost effective and energy saving
- Suitable for both switch start and high frequency
- Long life 50000 hours
- Low maintenance costs
- Up to 65% Energy Savings
- Simple Retrofit
- Emergency pack available
- Low flicker rate for smooth and hassle free operations
- Available in 2/4/5/6 foot lengths to suit all applications & customer needs

5 Year Silver Warranty				
Code	Lamp Type	Temp	Lm	ØxL (mm)
Non Dimmable				
60260	T8 5W/9W LED T8 CCT Wattage Switchable Tubes	3/4/6000K	1250	28x600
60261	T8 9W/17.5W LED T8 CCT Wattage Switchable Tubes		2450	28x1200
60262	T8 12W/22W LED T8 CCT Wattage Switchable Tubes		3100	28x1500
60263	T8 12W/24W LED T8 CCT Wattage Switchable Tubes		3350	28x1800
09125	Emergency Pack for LED Tubes - Self Test On/Off Switch		-	-
For use with magnetic ballast: Remove starter and capacitor For use with electronic ballast: Remove control gear and wire directly to mains		-	-	-

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

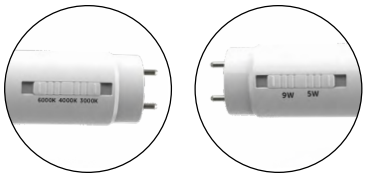

Selectable CCT & Wattage

Energy Savings compared to old technology CFL Lamps

9W 18W Energy Saving 50% | 17.5W 36W Energy Saving 51% | 22W 58W Energy Saving 62% | 24W 70W Energy Saving 65%

Quality Assured Product Warranty[2]	Colour Rendering Index[2]	Lumens Maintenance Ratio[1]	Operating Hours
5 Year	85	80	50,000

D

technical@belllighting.co.uk
sales@belllighting.co.uk