



Arialmulti

IP65 Backlit LED Panel

The IP65 version of our Arial Multi Backlit LED Panel is an ideal product for areas that may contain moisture such as changing rooms, locker rooms & commercial kitchen environments.


- Front face IP65
- Professional Backlit LED panel
- 0-10V Dimming or DALI Dimming options available
- TPb
- BELL Driver
- Anti-twist frame
- Emergency panels with 5 year battery warranty available



LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

No Light Fall Off




Seamless Trim Design



IP65 Backlit LED Panel

Technical Specification	
Construction	Steel + PMMA
Driver	BELL
LED Chip	Philips
IP Rating	IP65 (Front face)
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes
Emergency Battery Type	NiCd 1 Year Emergency / LiFePO4 5 Year Emergency

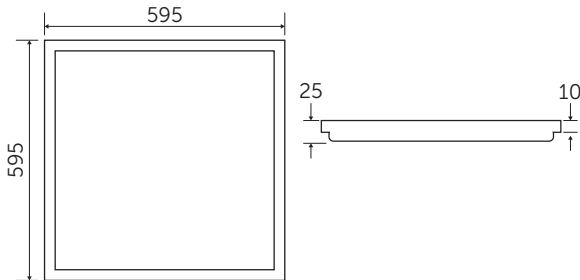

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)

IP65 Backlit LED Panel

Code	W	Description	Up to Lm/W	Lm	Temp	Hours
11780	20/26/30/36	Arial IP65 LED Backlit Panel - 600x600mm,	130	2600/3450 3900/4650	4000	50000
11781	20/26/30/36	Arial IP65 LED Backlit Panel - 600x600mm, Emergency, (1 Year Battery Guarantee)	130	2600/3450 3900/4650	4000	50000
11783	36	Arial IP65 LED Backlit Panel - 600x600mm, White, 0-10V Dim	130	4650	4000	50000
11784	36	Arial IP65 LED Backlit Panel - 600x600mm, White, Dali Dim	130	4650	4000	50000
08747	2.5	LED Emergency Pack (self + manual test)	-	-	-	-

Available on request:

- Emergency 0-10V Dim
- Emergency Dali Dim
- Emergency panels with 5 year battery warranty available

For further information call 01924 893380 or email sales@belllighting.co.uk

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.