
SYCAMORE

Product Diagram

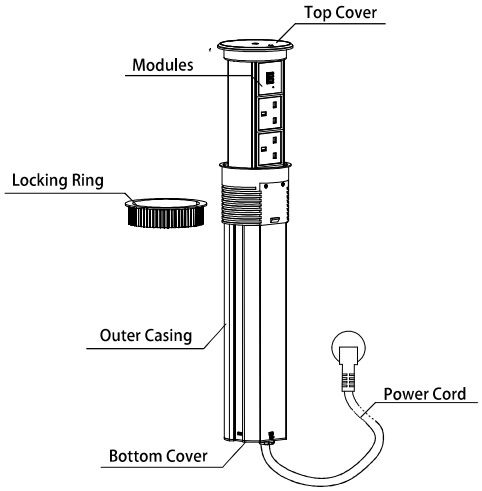

Safety Guide

1. For indoor use only.
2. When using the wireless charger, please do not place metal objects, magnets, magnetic stripe cards, or similar items on it.
3. Do not insert foreign objects into the socket.
4. Avoid spilling liquids into the socket.
5. Do not attempt to disassemble the unit.
6. If the product malfunctions, please contact a professional electrician immediately.

Product Features

- Compatible with Type 45 series modules.
- Integrated 15W wireless charging function.
- IP54 protection when closed.
- Quick and Easy installation.
- Equipped with anti-trap & obstruction detection safety mechanisms


Requirements for Product Installation

Recommended cut-out dimension: ⌀95mm

Installation Instructions


1. Cut-out opening

Make a 95mm circular hole on the desired surface. Ensure there is sufficient space below for the unit to fully retract and for the cables to run freely from the base of the unit. The recommended space underneath the counter top should be 520mm or more. Maximum distance from the mounting hole to the power supply should be within 1.5m. Suitable surface thickness is 10 - 45mm.

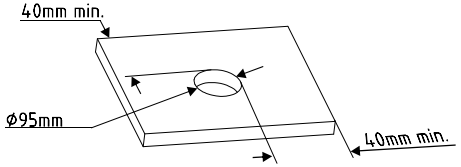


2. Mounting the unit

Remove the locking ring from the unit and set it aside. Feed the power cable through the cut-out hole until the entire length of the cable has passed through (be careful to avoid damaging the power cable). Insert the unit into the cutout and ensure it sits level with the surface.

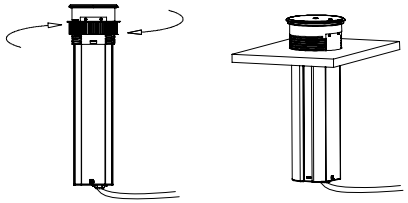


3. Secure the product

Rotate the unit into the desired orientation. From underneath the worktop, screw the locking ring back on clockwise until secure. NOTE: if the locking ring becomes misaligned, it may jam. If this occurs, unscrew it, realign it carefully and tighten again.

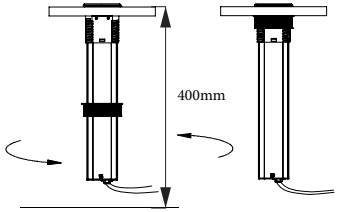

4. Connect to power supply

Once installation is complete, plug the power cable into a suitable mains outlet. The unit is now ready to use.




SYCAMORE

Operation Instructions


1. Initiate the unit

Press and hold the touch switch on the top cover for 3 seconds until the LED light turns blue, to enable the motorised raise/lower function.

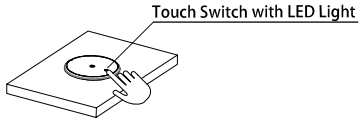


2. Intelligent raise operation

- After the start process is complete, press the switch again and the unit will raise until fully extended.
- The unit can be paused during operation by pressing the touch switch once.
- If an obstruction is detected while rising, the safety function will stop the unit in its current position.
- Once the obstruction has been removed, press the touch switch again to continue raising.

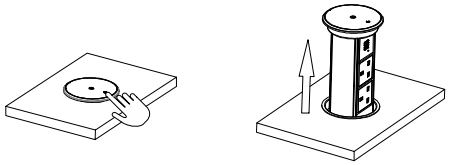


3. Intelligent lowering operation

- Once the unit is fully raised, press the touch switch to begin lowering.
- The unit can be paused whilst lowering by pressing the switch again.
- If an obstruction occurs during lowering, the anti-trap safety mechanism will reverse the movement slightly and stop.

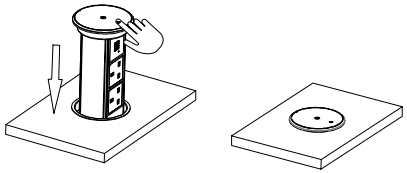

4. Wireless charging

- Place your device carefully on top of the cover (avoid accidental contact with touch switch)
- Ensure the centre of the device is aligned with the centre of the charging pad.
- Ensure there are no metal/foreign objects on the charging surface.
- Thick protective cases may interfere with charging and should be removed if necessary.
- Compatible with all Qi-enabled devices.

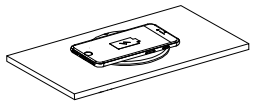

Sycamore Lighting Ltd, LS25 2DY Technical Helpline: 01132 866686