





# LED Integrated CCT Anti Corrosive Batten


The Dura LED CCT Anti Corrosive Batten is part of one of BELL's flagship luminaire families. The Dura CCT combines the reliability of the Dura Batten with the added CCT & wattage switchable functionality. Plug in emergency packs, Microwave and PIR on/off sensors create a very stock friendly solution for wholesalers and contractors alike.

- The ideal replacement for Single/Twin Fluorescent T8 and T5 Fixtures
- Special high light transmission frosted polycarbonate diffuser for smooth uniform dimming
- Perfect for all commercial environments
- Tool-free termination
- Plug in accessories
- Stock friendly product
- Suitable for BESA Box mounting



LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

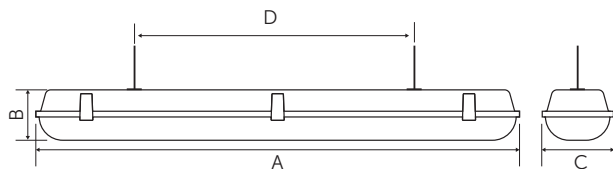

	A	B	C	D
20/40W 4' Batten	1263mm	90mm	90mm	900-955mm
25/50W 5' Batten	1530mm	90mm	90mm	1000-1055mm
30/60W 6' Batten	1828mm	90mm	90mm	1000-1055mm

W	Colour Temp (K) Selected	Lm
20	3000	2850
	4000	3000
	6000	2950
40	3000	5100
	4000	5550
	6000	5250
25	3000	3550
	4000	3800
	6000	3850
50	3000	6350
	4000	7000
	6000	6800
30	3000	4250
	4000	4500
	6000	4450
60	3000	7500
	4000	8150
	6000	7950



# LED Integrated CCT Anti Corrosive Batten

Technical Specification	
Construction	Polycarbonate Body & lens
Driver	BELL
LED Chip	Samsung
IP Rating	IP66
Operating Temp	-30°C to +35°C / Emergency version minimum temperature -5°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes

<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio

<sup>2</sup> Exceeds EU standard of RA 80 for Colour Rendering Index

<sup>3</sup> Subject to terms & conditions (Contact Customer Service)



# LED Integrated CCT Anti Corrosive Batten

Code	W	Description	Lm	Temp	Hours
10275	20/40	Dura LED Anti Corrosive Batten - CCT, 1200mm (4ft)	2850-5550	3/4/6000K	50000
10276	25/50	Dura LED Anti Corrosive Batten - CCT, 1500mm (5ft)	3550-7000	3/4/6000K	50000
10277	30/60	Dura LED Anti Corrosive Batten - CCT, 1800mm (6ft)	4250-8150	3/4/6000K	50000
10281	-	Plug in Emergency Pack for CCT Battens	-	-	-
10282	-	Plug in Sensor On/Off for CCT Battens	-	-	-
10293	-	Plug in PIR for CCT Battens	-	-	-
10294	-	Remote Control for CCT Battens (PIR only)	-	-	-
91359	-	Plug In Self Test pack for CCT Battens	-	-	-

**PIR Max Operating Height 3.2m**

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty