

Smart Remote Control

Single Colour/CCT/RGB+CW

Code: ELA-45765 / ELA-45766 / ELA-45767



This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)

CHL, GORSE MILL, OL9 9RJ
www.cascadehl.com/#contact


EU Authorised Representative: Authorised Rep Compliance,
Ground Floor, 71 Lower Baggot Street, Dublin, Ireland,
D02P593. www.authorisedrepcompliance.com



A. PRODUCT SPECIFICATIONS

Product Name	12 Keys Remote Controller	
Control Distance	25m (open space)	
Operating Voltage	3V DC	
Standby Time	6 month or 4000 pushes	
Battery Type	CR2032 * 1pcs	
Battery Capacity	220 mAh	
Wireless Protocol	RF2.4G	
Operating Temperature	-20°C to 55°C	
Shell Material	ABS + PC	
Warranty Period	3 years	
Product Dimensions	Remote Control L118.5 x W47 x H15.2 mm	Wall Mount Bracket L98 x W50 x H17 mm

B. OPERATION INSTRUCTION

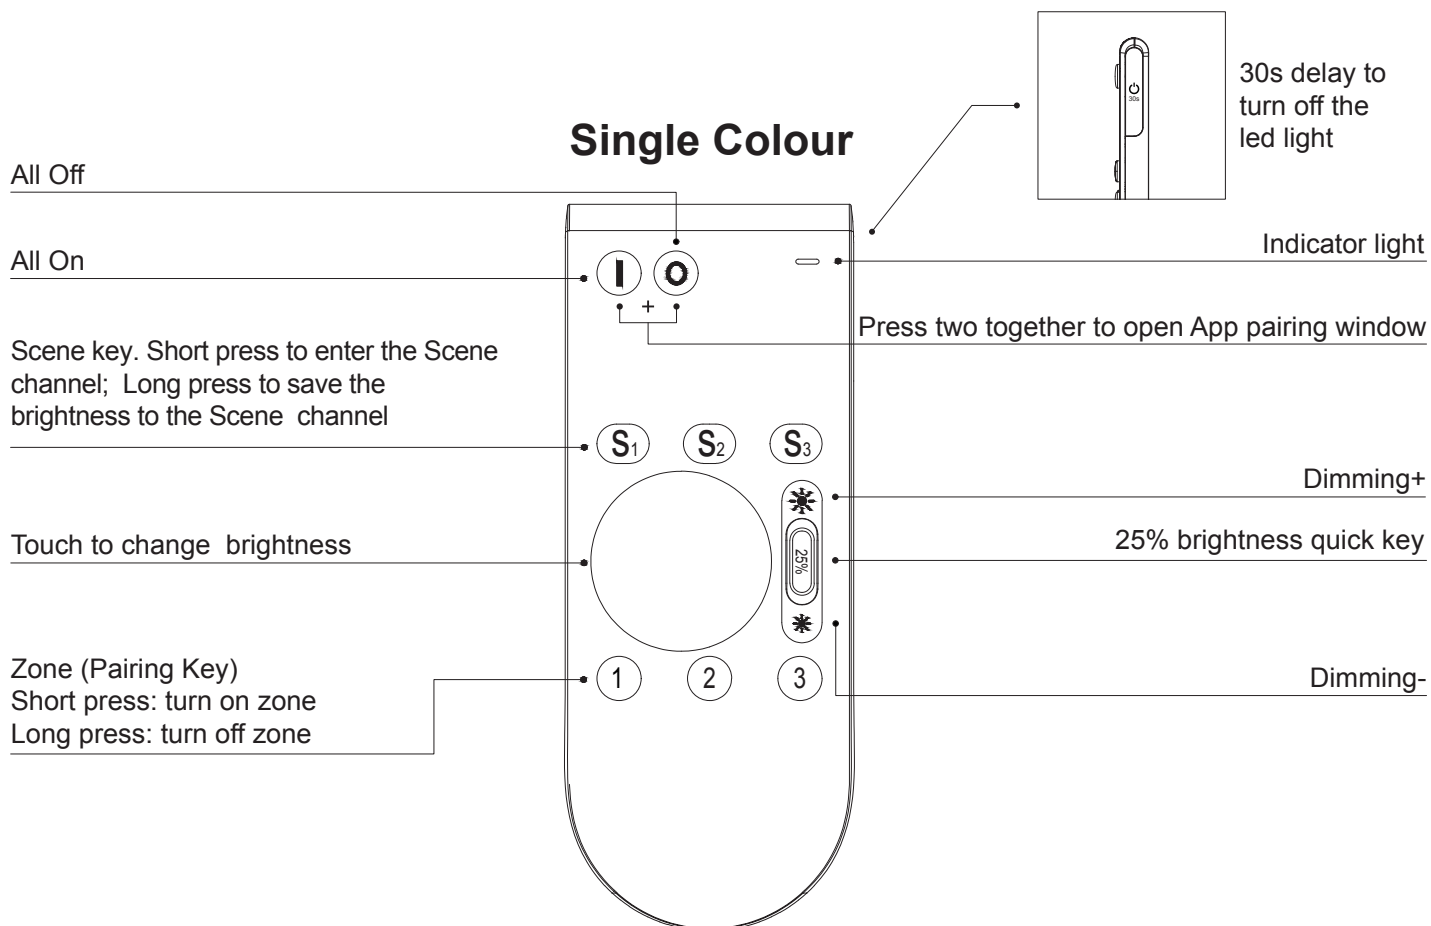

CCT



All Off

All On

Scene key. Short press to enter the Scene channel; Long press to save the brightness to the Scene channel

Touch to change color

Zone (Pairing Key)
Short press: turn on zone
Long press: turn off zone

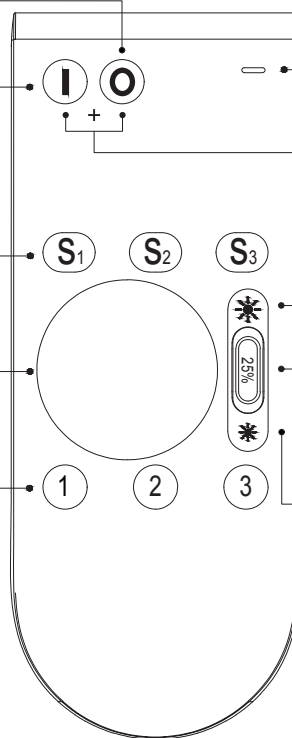

CCT key
Switch to warm & cool white

Indicator light

Press two together to open App pairing window

Dimming+

25% brightness quick key

Dimming-

RGB+CW



Short press: switch warm & cold white
Long press: switch color

Scene key. Short press to enter the Scene channel; Long press to save the brightness to the Scene channel

RGB key

Touch to change color

Zone (Pairing Key)
Short press: turn on zone
Long press: turn off zone

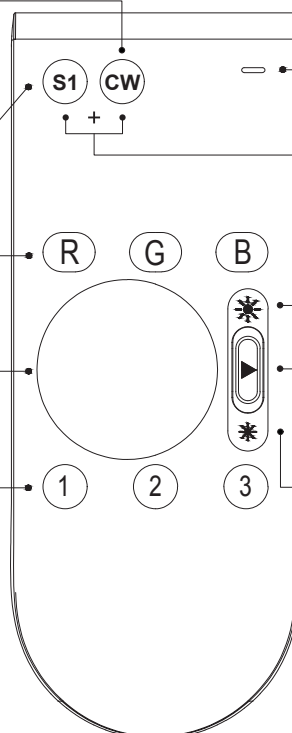

All On/Off

Indicator light



Press two together to open App pairing window

Dimming+


Dynamic
Short press to enter to Dynamic and switch to mode 1 to mode 10;
Long press back to mode 1

Dimming-


D. HOW TO CONNECT

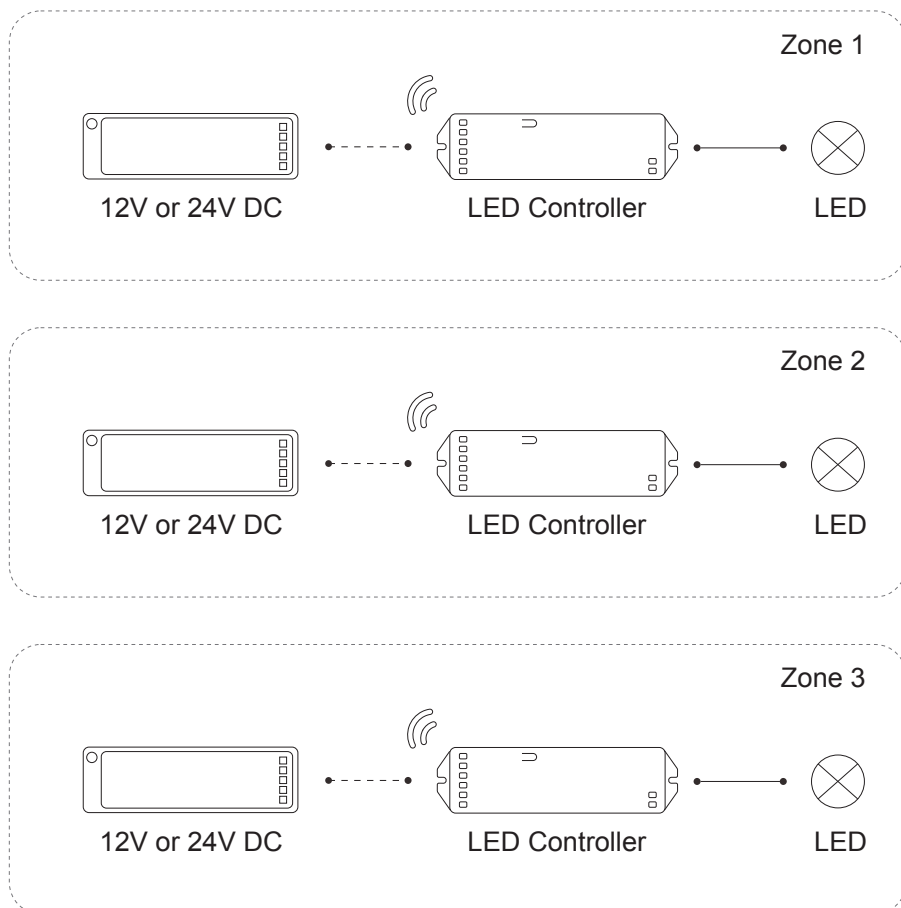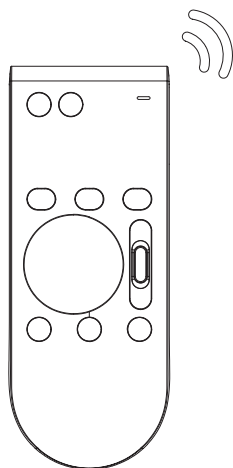


E. INSTALLATION INSTRUCTION



Step 1
Secure the base to the wall
using screws.






Step 2
Place the remote control
into the base.



Installation is complete!


Battery disassembly diagram

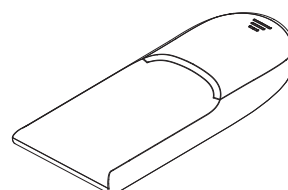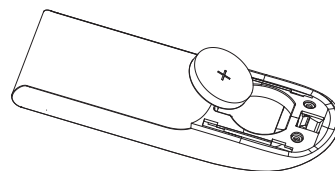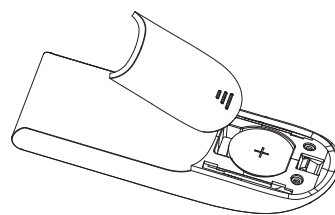


F. PAIRING MODE

LED Controller

Dimmer / CCT Controller

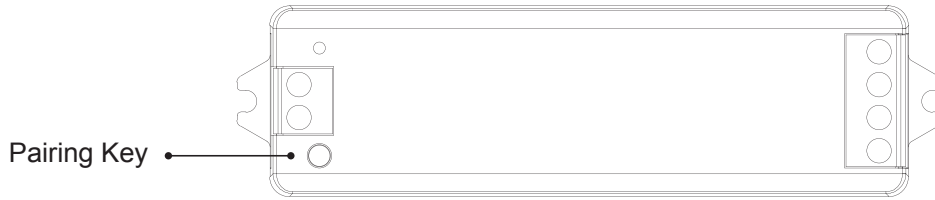

RGBCW(5 in 1)Controller

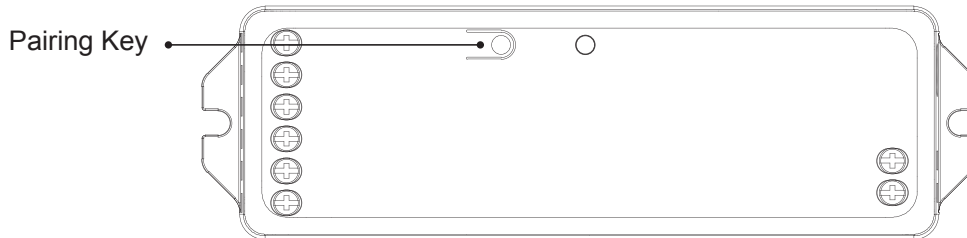

Pairing 1:

Press the pairing button Prog. on the controller once to enter pairing window lasting 20secs, the led strip light will be off. Press the pairing key (zone number key) on the Remote Control once to complete the pairing, the led strip light will flash once when the pairing is successful.

Pairing 2:

The first time power on, the controller will automatically enter the remote control pairing, the indicator light will be on lasting 20secs, press the pairing key (zone number key) on the Remote Control once to complete the pairing, the led strip light will flash once when the pairing is successful.

Unpairing:

Press the zone number key 5 times quickly within 5 secs, the corresponding pairing will be cleared.