

GU10 Surface Downlight

Installation instructions for JC84320

Warnings & Cautions

- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or installing the product
- It is recommended that luminaires are installed by a qualified electrician and the installation complies with the local current wiring regulations
- It may be necessary to upgrade your MCBs to allow for increased inrush current
- This product is for indoor use only.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations; which will void the warranty
- For ceiling mounting only, not suitable for wall mounting
- Do not use halogen lamps in this product
- These products are designed for connection to a 220-240V~ 50/60Hz

INSTALLATION

ENGLISH

Specification: GU10 cap 7W LED max (lamp not included)

Available finishes: Black(BLK) or White(WH)

220-240V~ 50/60Hz Class I

Fig 2. Mains Input

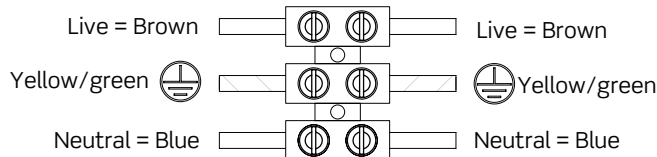


Fig 1


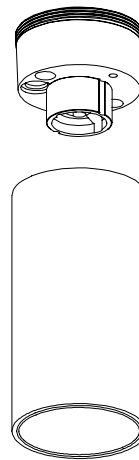


Fig 3



Installation procedure

1. Unscrew cylinder diffuser from main body (fig 1). Determine mounting location using the main body as a template, drill holes and insert plastic plugs.
2. Connect the mains input (fig. 2) and secure main body to ceiling (fig 3).
3. Place lamp in lampholder (fig 4).
4. Screw cylinder diffuser back onto main body (fig 5). Be careful not to overtighten.
5. Reconnect mains power supply and test for operation.

Fig 4







Fig 5

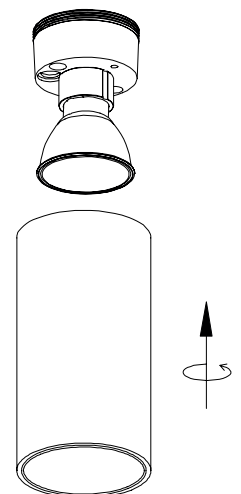

Profile & Dimensions

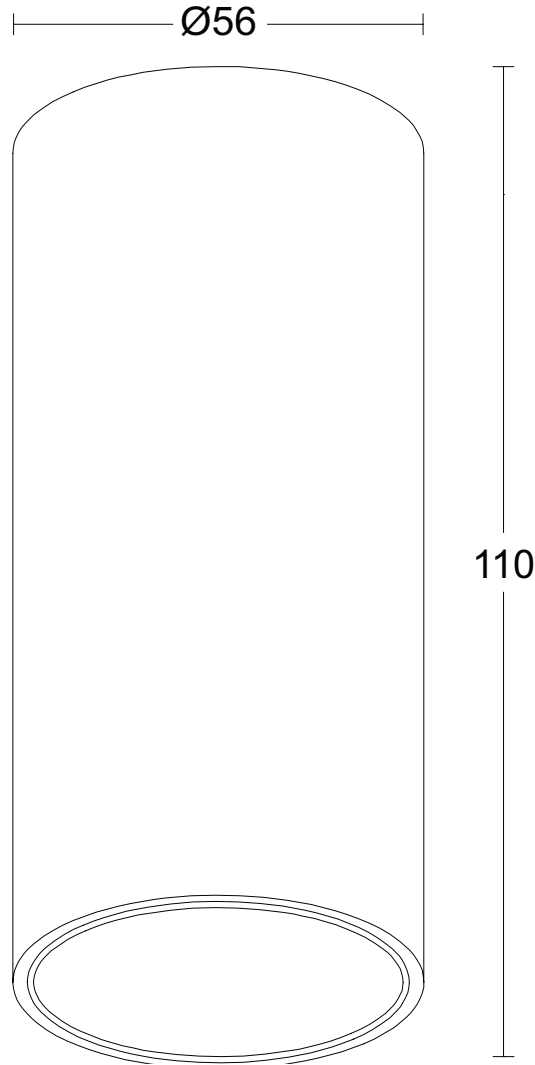

All dimensions in millimetres

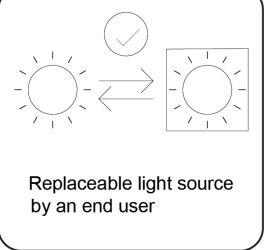

You can help protect the environment. Please remember to respect the local regulations: hand in the non-working electrical equipment to an appropriate waste disposal centre. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection service.

Important warranty information

This product is supported by a 2-year standard warranty which will extend to 3 years if registered within the first year of purchase. Please register at jcc.co.uk/warranty - Terms and conditions apply.

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis:
Product Code/Date Code.