



IC Rated up to 350mm insulation  
Bezels sold separately

[www.belllighting.co.uk](http://www.belllighting.co.uk)

# Firestayprimo

CCT 4 COLOUR / 3 WATTAGE SWITCHABLE

## Integrated LED Fixed Downlight

The Firestay Primo LED CCT is a High Output Downlight ideal for high ceilings or any project requiring high intensity light, 4 way colour and 3 wattages switchable straight out of the box.


With a 7 year product warranty, the front facing switch enables the user to seamlessly change the colour temperature (2700/3000/4000/6000K) to suit the mood of any space while the driver mounted wattage switch enable you to instantly dictate the light level of any commercial or residential premises.

- Firestay Certification: 30, 60 and 90 minute solid joist ceilings, 30 minute I-Joist & Metal Web ceiling systems
- IP65
- Front CCT switch
- 12 in 1 Fixture: 4 colour temperatures, 3 wattages
- White, Satin, Chrome, Brass, Antique Brass & Matt Black bezels available
- Part B / C / E compliant
- IC rated
- Tool-Free termination
- 60° Beam Angle
- Spacer plate options available



LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours



Wattage Selected	Colour Temp (K) Selected	Lumens (lm)	Candelas (cd)
10W	2700	1080	885
	3000	1115	905
	4000	1170	935
	6000	1165	955
8W	2700	955	780
	3000	980	790
	4000	1025	815
	6000	1040	850
6W	2700	720	590
	3000	730	595
	4000	760	605
	6000	765	625


# Firestayprimo

CCT 4 COLOUR / 3 WATTAGE SWITCHABLE

## Integrated LED Fixed Downlight

192

The Firestay Primo LED CCT has an easily accessible colour selectable switch located under the bezel on the front of the downlights. Simply move the switch to select your colour temperature option.

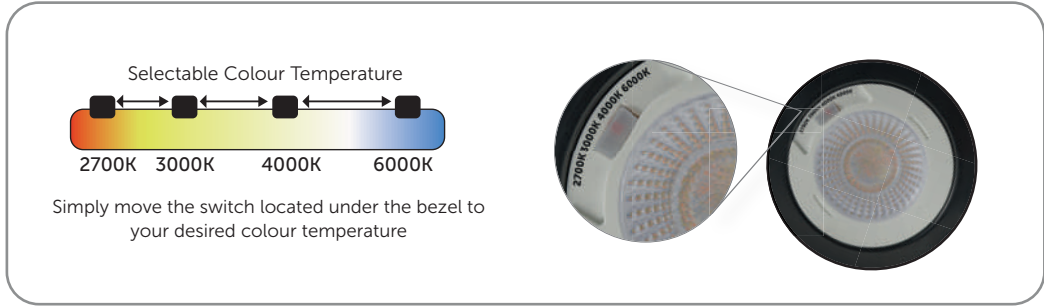

# Firestayprimo

CCT 4 COLOUR / 3 WATTAGE SWITCHABLE

Technical Specification	
Construction	Die-Cast Aluminium
Driver	BELL
LED Chip	Epistar
IP Rating	IP65
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

Code	Description	Colour Temperature	Lm	Cd	Beam <sup>0</sup>	Hrs
11390	6/8/10W Firestay Primo LED CCT Switchable Wattage Downlight Dim, CCT, P&P, 60° Beam Angle Tool Free Termination	2.7/3/4/6000	720 - 1170	590-955	60°	50000
11371	Matt White Bezel for above	-	-	-	-	-
11372	Satin Bezel for above	-	-	-	-	-
11373	Chrome Bezel for above	-	-	-	-	-
11374	Brass Bezel for above	-	-	-	-	-
11375	Antique Brass Bezel for above	-	-	-	-	-
11376	Matt Black Bezel for above	-	-	-	-	-
08196	Emergency Pack for above	-	-	-	-	-

<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio

<sup>2</sup> Exceeds EU standard of RA 80 for Colour Rendering Index

<sup>3</sup> Subject to terms & conditions (Contact Customer Service)