





LED CCT Asymmetric Wallpack

Designed to be used where the aesthetics of the light fitting, along with a tough robust construction is needed. The fittings are IP66 and IK8 compliant, supplied complete with an opal diffuser for even light distribution. Available in Standard / Photocell / Emergency / Emergency Photocell versions.

- CCT 3/4/6000K
- Genuine replacement for 50W Metal Halide & Sodium
- TUV Certified Driver
- High impact polycarbonate lens
- 50% energy saving
- 50000 hours

Options

- Standard / Photocell / Emergency / Emergency Photocell versions




LMR80: Maximum 20% of lumen depreciation over rated hours.
B10: Maximum 10% of fittings failure rate over rated hours



LED CCT Asymmetric Wallpack

Technical Specification

Construction	Aluminium Base Polycarbonate Lens
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-30°C to +35°C / Emergency version minimum temperature 0°C
Input Voltage	240V
Power Factor	> 0.9
CRI	80 - Exceeds EU standard of Ra 70 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

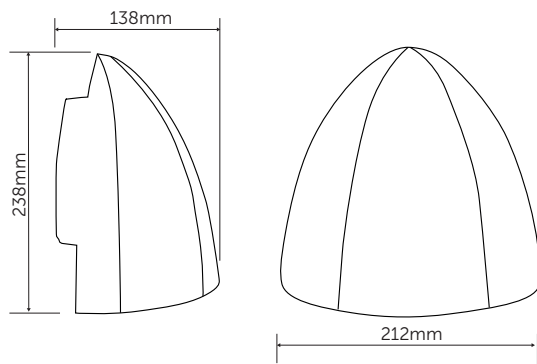

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 70 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)



LED CCT Asymmetric Wallpack

Code	V	W	Description	Lm	Lm/W	Temp	Hours
11500	240	25	Lumo LED CCT Asymmetric Wallpack	2875/3500/3250	115	3/4/6000K	50000
11501	240	25	Lumo LED CCT Asymmetric Wallpack Emergency	2875/3500/3250	115	3/4/6000K	50000
11502	240	25	Lumo LED CCT Asymmetric Wallpack Photocell	2875/3500/3250	115	3/4/6000K	50000
11503	240	25	Lumo LED CCT Asymmetric Wallpack Emergency Photocell	2875/3500/3250	115	3/4/6000K	50000

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.