

Novium LED Wall Pack Range

Installation instructions JC130014

Warning & cautions

- It is recommended that luminaires are installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible.
- JCC will not accept responsibility for claims arising from sub-standard installations; which will void the warranty.
- Ensure that you have the tools and accessories required to complete the installation correctly: Isolate the power before starting installation.
- The light source of this luminaire is not replaceable.
- This luminaire is suitable for outdoor use.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- This product is non-dimmable
- This product is CCT switchable, ensure power is isolated before changing CCT


INSTALLATION

ENGLISH

Specifications Colour Temp: 3000/4000K Ra: 80


Fig.1. Mains input

220-240V~ 50/60Hz / Class I




N = Neutral
 ⊕ = Earth
 L = Switched Live

Fig.2.




1. Remove Diffuser /gear tray by removing the three fixing screws on the diffuser shown in Fig.2.

Fig.3.




2. Select preferred CCT (3000K or 4000K) by selecting the correct option on the CCT switch shown in Fig.3.

Fig.4.

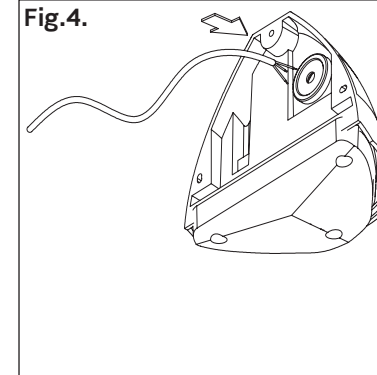


3. Feed mains input cable through the IP rated grommet in the rear of the fitting

Fig.5.

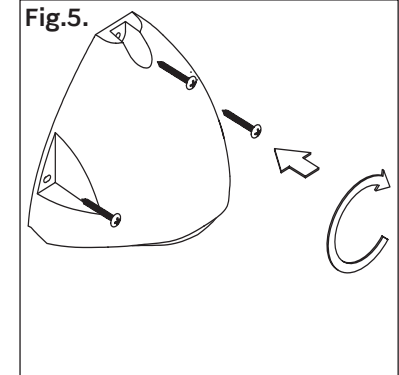


3. Use the body as a template for marking fixing points and secure

Fig.6.




5. Terminate the mains input cable as shown in Fig.1.

Fig.7.

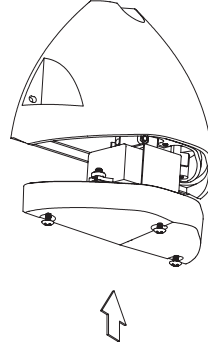

6. Refit diffuser/gear tray to body as shown above as per fig.7. Turn on mains supply and test for correct operation

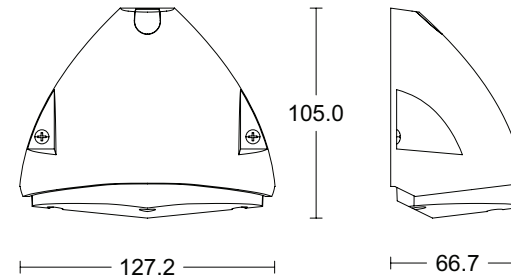

Important warranty information

This product is supported by a 2-year standard warranty which will extend to 5-years if registered within the first year of purchase. Please register at jcc.co.uk/warranty (Terms and conditions apply).

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis: Product Code/Date Code.

