



Spectrum

Product Upgrade

2W LED Emergency Non Maintained Downlight

The 2W Spectrum Auto Self Test Downlight is a 4 in 1 product which makes it one of the most versatile in the range. The downlight can be surface and recessed mounted and is supplied with both the Open Area & Corridor lenses.

- Selectable Self Test or Manual Emergency Mode
- Surface or recessed mount
- Suitable for open area or corridor
- Dual colour charge indicator, complete with driver and battery pack
- IP20




Technical Specification	
Construction	Polycarbonate
LED Chip	Samsung
IP Rating	IP40
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
Battery	LiFeP04

Code	W	Description	Temp	Lm	Hours
09126	2	LED Emergency Non Maintained Downlight	6500K	150	50000

See end of Emergency Lighting section for spacing tables

Must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

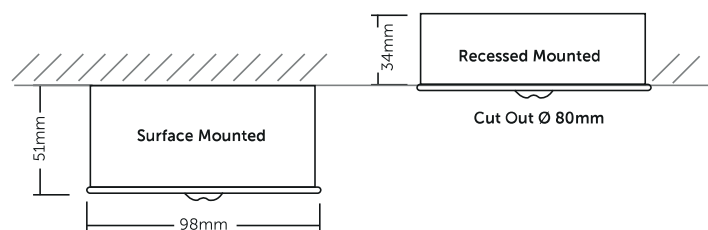

technical@bellighting.co.uk
sales@bellighting.co.uk