


FLUORESCENT LIGHT STRIP ADAPTOR

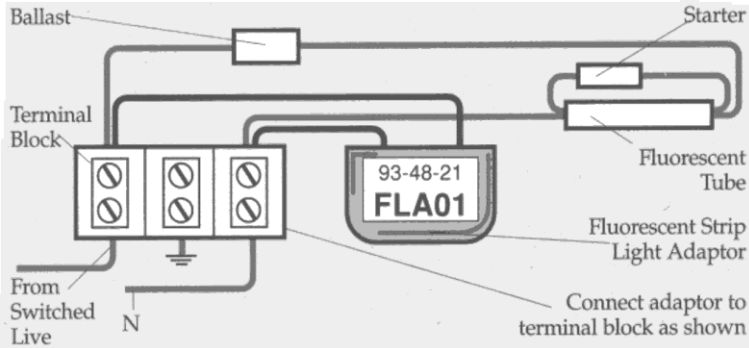

IMPORTANT INSTALLATION INSTRUCTIONS

Note: If multiple light fittings are controlled by the Timeguard switch, only one adaptor is required per circuit.

1. **SWITCH OFF THE MAINS ELECTRICITY.**
2. Remove the fluorescent tube from the light fitting.
3. Remove the metal cover from the light fitting and locate the terminal block.
4. Connect the adaptor between the Live feed to the tube and Neutral, along with the existing wiring to these terminals as shown in the diagram above. The adaptor leads can be cut and stripped to aid installation.
5. Replace and secure the metal cover making sure the adaptor and any hanging wires are safely enclosed within the fitting.
6. Insert the fluorescent tube and switch the electricity supply ON.

Specifications

Maximum Fluorescent Tube Load: 2 x 4ft fittings (Max 40W each) or
1 x 6ft fitting (Max 85W)

Conforms to latest directives

CE Compliant

3 Year Guarantee

Note: The fluorescent light strip adapter converts fluorescent lighting for use with the: Programmable Security Light Switch (ZV210/ZV215), Motion Sensor PIR Light (ZV810) and the Digital Light Switch (ZV700/ZV700B) only.

It **cannot** be used with the following products: Digital Security Light Switches (ZV300/310/350/360) and Copy-switch (ZV410/ZV415).

Timeguard Ltd reserves the right to withdraw, improve or modify any design without prior notification. Timeguard Ltd cannot be held responsible for the incorrect application of any product.

Additional information can be found at: www.timeguard.com