


## LED Converter / Large Converter

- Unrivalled product when it comes to versatility in the LED market
- All in one solution
- Selectable colour temperature
- Integral switches for multiple wattages and CCT
- Cool White / Warm White / Daylight
- Selectable wattage
- Fully adjustable / Innovative bracket
- Converter fits cut-outs 65mm to 205mm - Large converter fits cut-outs 120mm to 260mm
- Emergency pack available



Panel Warranty <sup>1</sup> <b>5 Year</b> Exc Battery	On site Warranty <sup>1</sup> <b>2 Year</b> Exc Battery	Battery Warranty <sup>1</sup> Emergency Versions <b>1 Year</b>	Colour Rendering Index <sup>1</sup> <b>85</b>	Lumens Maintenance Ratio <sup>1</sup> <b>L80 B10</b>	Water & Dust Protected <b>IP40</b>	Operating Hours <b>50,000</b>
---	---	--	--	---	---------------------------------------	----------------------------------

Technical Specification	
Construction	Polycarbonate
Driver	BELL
LED Chip	Samsung
Input Voltage	220 - 240V
Power Factor	> 0.9
Operating Temp	0°C to +35°C
Standard	CE & UKCA

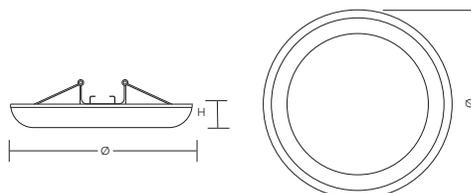



#### 5 Year Silver Warranty

Code	W	Description	Lm	Temp	HxØ (mm)
06840	10/13/16	LED Converter - Wattage Switchable, CCT 65mm-205mm cut out	1070-1815	3/4/6000K	16x235
06846	10/13/16	Arial LED Converter - Wattage Switchable, CCT 65mm-205mm cut out, Emergency	1070-1815	3/4/6000K	25x300
06839	16/20/22	Arial LED Converter - Wattage Switchable, CCT 120mm-260mm cut out	1670-2550	3/4/6000K	25x300
06842	16/20/22	Arial LED Converter - Wattage Switchable, CCT 120mm-260mm cut out, with Microwave Sensor	1670-2550	3/4/6000K	16x235
06847	16/20/22	Arial LED Converter - Wattage Switchable, CCT 120mm-260mm cut out, Emergency	1670-2550	3/4/6000K	25x300