


LED Emergency 6 in 1 Exit Blade

- Ability to be displayed in 6 different ways; Surface / Suspended / Recessed / Wall / Parallel / Angled Mounting
- Selectable Self Test or Manual Emergency Mode
- Suitable for commercial and industrial installations
- Different legend options available
- Maintained / Non Maintained
- Viewable from both sides
- Viewing distance 25m




| Technical Specification | | | | |
|-------------------------|---------------|--|--|--|
| Construction | Polycarbonate | | | |
| LED Chip | Samsung | | | |
| Input Voltage | 220 - 240V | | | |
| Power Factor | > 0.9 | | | |
| Operating Temp | 0°C to +35°C | | | |
| Standard | CE & UKCA | | | |
| Battery | LiFeP04 | | | |



technical@belllighting.co.uk sales@belllighting.co.uk



| 5 Year Silver Warranty | | | | | | |
|------------------------|---|---|-------|------------------|------------|--|
| Code | W | Description | Temp | Viewing Distance | WxHxD | |
| 09066V2 | 2 | LED Emergency 6 in 1 Exit Blade. Including New (ISO) Up Legend (White Version) | 6500K | 25M | 267x170x34 | |
| 09130 | 2 | LED Emergency 6 in 1 Exit Blade. Including New (ISO) Up Legend (Black Version) | 6500K | 25M | 267x170x34 | |
| 09067V2 | - | New Legend Reversible Left & Right | - | _ | - | |
| 09068V2 | - | New Legend Down | - | - | - | |

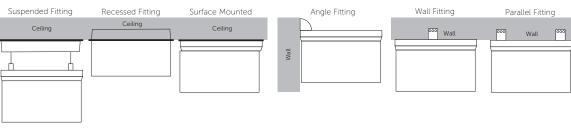

Legend Options

