



## Skyline Powertron Asymmetric LED Floodlight

- Ideal for external sports lighting facilities
- Black powder coated die cast robust aluminium construction
- 600/1200/1800W Modular Body Design
- Genuine replacement for 1000W/2000W Metal Halide Floodlights
- Fully adjustable angled mounting bracket
- Suitable for multiple row column installations
- Scope available on request for fine on site aiming
- Full cut-off horizontal asymmetric floodlight
- Optional ULR Shields available for 0% upward light, glare and obstructive light reduction
- Remote driver gear tray, can be mounted on ground level for easy maintenance

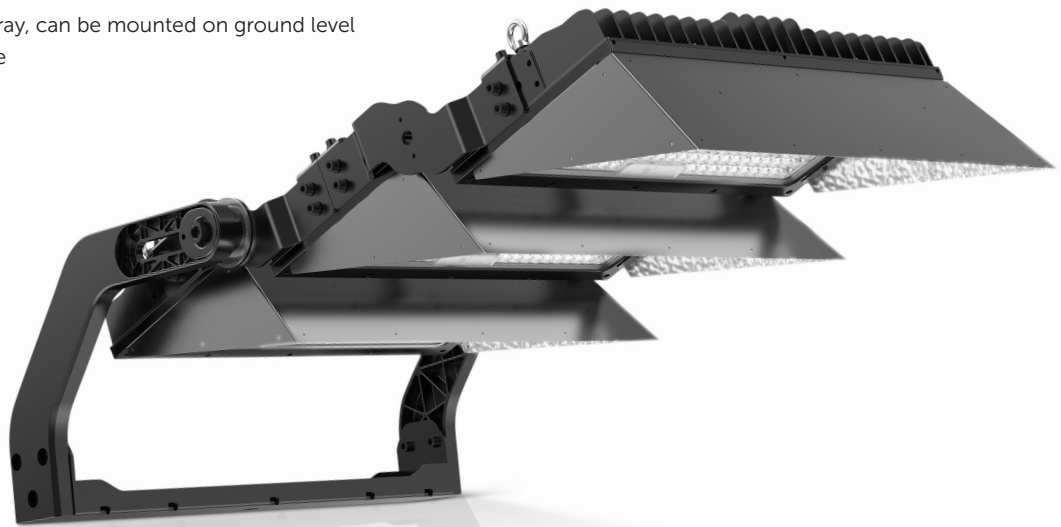

600W $\equiv$ 1000W MH Energy Saving 40%	1200W $\equiv$ 2000W MH Energy Saving 40%						
Quality Assured Product Warranty <sup>2</sup> <b>10 Year</b>	On site Warranty <sup>2</sup> <b>2 Year</b>	Colour Rendering Index <sup>2</sup> <b>70</b>	Lumens Maintenance Ratio <sup>2</sup> <b>L80 B10</b>	Water & Dust Protected <b>IP66</b>	Surge Protected <b>10000V</b>	Impact Rating <b>IK8</b>	Operating Hours <b>100,000</b>

Technical Specification	
Construction	Powder coated die-cast aluminium (RAL 9017)
Driver	600W UPowerTek / 1200 & 1800W BELL
LED Chip	OSRAM 3737
Input Voltage	200-240
Power Factor	> 0.9
Operating Temp	-30°C - +35°C
Standard	CE & UKCA

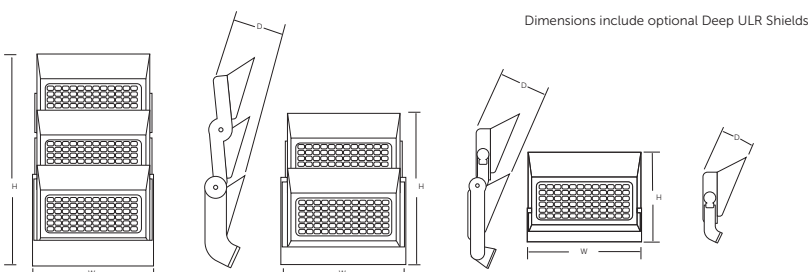



### 10 Year Gold Warranty

Code	W	Description	Lm (up to)	Temp	Lm/W (up to)	Weight Remote/Inc Driver	Windage	WxHxD (mm)
11330	600	NAB Floodlight	94,200	4200K	157		0.07 m <sup>2</sup> @ 0°	
11829	600	MAB Floodlight	92,600	4200K	154	8.9 Kg / 13.2 Kg (Excluding visor)	0.10m <sup>2</sup> @ 15°	605x474x172
11830	600	WAB Floodlight	92,800	4200K	155		0.14m <sup>2</sup> @ 30°	
11331	1200	NAB Floodlight	188,650	4200K	157		0.09m <sup>2</sup> @ 0°	
11831	1200	MAB Floodlight	186,000	4200K	155	22.5 Kg / 27.9 Kg (Excluding visor)	0.18m <sup>2</sup> @ 15°	655x810x400
11832	1200	WAB Floodlight	185,900	4200K	155		0.26m <sup>2</sup> @ 30°	
11332	1800	NAB Floodlight	283,330	4200K	157		0.11m <sup>2</sup> @ 0°	
11833	1800	MAB Floodlight	280,450	4200K	156	30.4Kg / 36.3Kg (Excluding visor)	0.26m <sup>2</sup> @ 15°	695x1125x435
11834	1800	WAB Floodlight	280,260	4200K	156		0.39m <sup>2</sup> @ 30°	
11341		Deep Visor	-	-	-	-	-	-
11345		Shallow Visor	-	-	-	-	-	-
11828		Deep Back Shield	-	-	-	-	-	-
11844		Shallow Back Shield	-	-	-	-	-	-
11346		Aiming Scope	-	-	-	-	-	-