

ArialT-PRO multi


Troffer Backlit LED CCT Panel

- Wattage Switchable
- The contemporary slimline design and aesthetic light distribution works well in areas that would like to move away from the standard familiar panel we have all become accustomed to
- High efficiency
- Aesthetic light distribution
- Contemporary slimline design
- TPa
- 0-10V Dimming and Dali dimming options available
- Casambi Enabled option available
- Emergency panels with 5-year battery warranty available



Panel Warranty ¹ 7 Year	On site Warranty ¹ 2 Year	Battery Warranty ¹ Emergency Versions 1 Year	Colour Rendering Index ¹ 85	Lumens Maintenance Ratio ¹ L80 B10	Low Unified Glare Rating UGR <19	Water & Dust Protected IP20	Flicker Free Driver	Operating Hours 50,000
--	--	--	--	---	---	---------------------------------------	-------------------------------	----------------------------------

Technical Specification	
Construction	Aluminium + PMMA
Driver	BELL
LED Chip	Philips
Input Voltage	220 - 240V
Power Factor	> 0.9
Operating Temp	0°C to +35°C
Standard	CE & UKCA

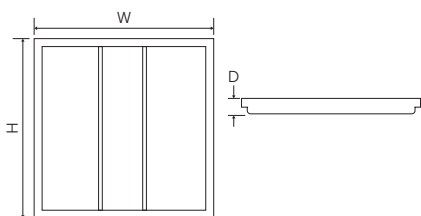



7 Year Gold Warranty

Code	W	Description	Lm	Temp	WxHxD (mm)
11415	20/26/30/36	UGR Troffer Panel - 600x600mm, CCT	2250-3950	3/4/6K	
11416	20/26/30/36	UGR Troffer Panel - 600x600mm, CCT, Emergency 1 year	2250-3950	3/4/6K	
11418	36	UGR Troffer Panel - 600x600mm, CCT, 1-10v	3950	3/4/6K	595x595x33
11417	36	UGR Troffer Panel - 600x600mm, CCT, Dali	3950	3/4/6K	
08747	2.5	LED Emergency Pack (self + manual test)	-	-	-
30024	-	Burgess Ceiling Grid Bracket Kit for LED Panels	-	-	-

Available on request:

- Emergency 0-10V Dim
- Emergency Dali Dim
- Emergency panels with 5 year battery warranty available

For further information call 01924 893380 or email sales@belllighting.co.uk

*Lumens based on 4000K