




Wattage Switchable CCT Vandal Resistant Anti-Ligature Backlit LED Panel

- Suitable for commercial, healthcare, education & custodial applications
- Recessed Backlit Vandal Resistant Panel
- CCT 3/4/6000K
- Fast-Fit High Security Brackets
- TPa Rated Diffuser
- Powered by Tridonic



Quality Assured Product Warranty ¹	On site Warranty ²	Battery Warranty ³ Emergency Versions	Colour Rendering Index ⁴	Lumens Maintenance Ratio ⁵	Water & Dust Protected	Flicker Free	Impact Rating	Operating Hours
10 Year	2 Year	5 Year	85	L80 B10	IP65	Driver	IK10	100,000

Technical Specification	
Construction	Steel + Polycarbonate
Driver	Tridonic
LED Chip	Samsung
Input Voltage	220 - 240V
Power Factor	> 0.9
Operating Temp	0°C to +35°C
Standard	CE & UKCA

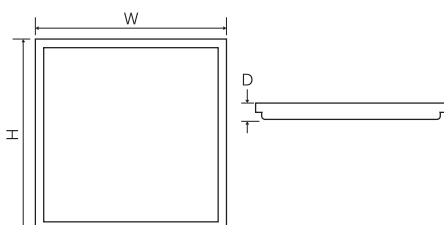

technical@belllighting.co.uk
sales@belllighting.co.uk



10 Year Gold Warranty

Code	W	Description	Lm	Temp	WxHxD (mm)
70030	22/31	Arial Endure Vandal Resistant Anti-Ligature Backlit LED Panel 25mm 600x600mm, White	3080-4294	3/4/6000K	600x600x25
70031	22/31	Arial Endure Vandal Resistant Anti-Ligature Backlit LED Panel 25mm 600x600mm, White, Emergency	3080-4294	3/4/6000K	600x600x25
70041	22	Arial Endure Vandal Resistant Anti-Ligature Backlit LED Panel 25mm 600x600mm, White, Dali	3080	3/4/6000K	600x600x25
70032	31	Arial Endure Vandal Resistant Anti-Ligature Backlit LED Panel 25mm 600x600mm, White, Dali	4294	3/4/6000K	600x600x25
70042	22	Arial Endure Vandal Resistant Anti-Ligature Backlit LED Panel 25mm 600x600mm, White, 1-10	3080	3/4/6000K	600x600x25
70033	31	Arial Endure Vandal Resistant Anti-Ligature Backlit LED Panel 25mm 600x600mm, White, 1-10	4294	3/4/6000K	600x600x25