



Illuminamuto

Switchable Wattage LED High Bay

The Illumina Muto is our most cost-effective LED High Bay to date. Perfect for all warehouses and factories of any size due to its wattage switchable functionality. This genuine replacement for Metal Halide or Sodium lighting offers up to 120 lumens per watt and a 3-year warranty.


- 100/150/200 & 100/120/150 Wattage Switchable & 100W fixed versions
- Up to 120 lm/W
- Genuine Replacement for 150/250/400W Metal Halide or Sodium
- Cool White 4000K
- Perfect for warehousing, large retail and factories
- 120° Beam Angle

100W \rightleftharpoons 150W MH/SON Energy Saving 33%	150W \rightleftharpoons 250W MH/SON Energy Saving 40%	200W \rightleftharpoons 400W MH/SON Energy Saving 50%
---	---	---



LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

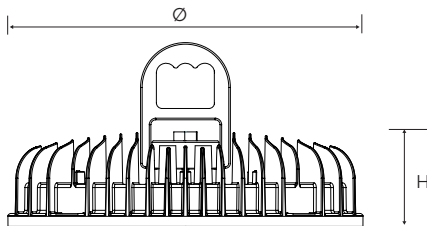

	100/150/200W	100/120/150W	100W
Ø	300mm	260mm	220mm
H	60mm	60mm	60mm



technical@bellighting.co.uk
sales@bellighting.co.uk



Switchable Wattage LED High Bay

Technical Specification	
Construction	Die Cast Aluminium
Driver	DOB
LED Chip	Seoul Semiconductor
IP Rating	IP65
Operating Temp	-30°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 70 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Weight	08945 2.9Kg / 08946 2.0Kg / 11360 1.6Kg

Code	W	Description	Lm	Temp	Hours
08945	100/150/200	100-200W Illumina Muto Switchable Wattage LED High Bay	12000/18000/24000	4000K	30000
08946	100/120/150	100-150W Illumina Muto Switchable Wattage LED High Bay	11500/13800/17250	4000K	30000
11360	100	100W Illumina Muto LED High Bay	11000	4000K	30000
08947	-	Mounting Bracket for above	-	-	-

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 70 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

