



LED Integrated CCT Anti Corrosive Batten

- Combines the reliability of the Dura Batten with the added CCT & wattage switchable functionality
- 3000/4000/600K Colour Switchable
- 4 Wattage Switchable
- Plug in emergency packs, Microwave and PIR on/off sensors create a very stock friendly solution for wholesalers and contractors alike
- The ideal replacement for Single/Twin Fluorescent T8 and T5 Fixtures
- Perfect for all commercial environments
- Tool-free termination
- Suitable for BESA Box mounting
- Improved lens clips for quick and easy access
- Repositionable terminal blocks
- Multiple entry points



Quality Assured
Product Warranty³
7 Year

On site
Warranty³
2 Year

Colour Rendering
Index³
85

Lumens
Maintenance Ratio³
L80 B10


Water & Dust
Protected
IP66

Impact
Rating
IK10

Operating
Hours
50,000

Technical Specification

Construction	Polycarbonate Body & lens
Driver	BELL
LED Chip	Samsung
Input Voltage	220 - 240V
Power Factor	> 0.9
Operating Temp	-30°C to +35°C / Emergency version min temp -5°C
Standard	CE & UKCA

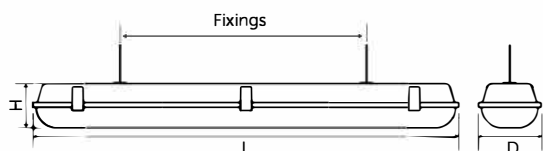

technical@belllighting.co.uk
sales@belllighting.co.uk



7 Year Gold Warranty

Code	W	Description	Lm	Temp	LxHxD Fixings (mm)
10275V2	16/21/26/32	LED Anti Corrosive Batten - CCT, 1200mm (4ft)	2579-5051	3/4/6000K	1270x78x96 900-955
10276V2	25/33/42/50	LED Anti Corrosive Batten - CCT, 1500mm (5ft)	3840-7771	3/4/6000K	1570x78x96 1000-1055
10277V2	30/40/50/60	LED Anti Corrosive Batten - CCT, 1800mm (6ft)	4438-9219	3/4/6000K	1870x90x90 1000-1055
10283	-	Plug in Emergency Pack for above	-	-	-
10284	-	Plug in Sensor On/Off for above In-built On/Off & Corridor DIM functionality	-	-	-