





LED CCT Integrated Batten


The Ultra LED CCT is a versatile general-purpose batten. The Ultra CCT has the reliable features of the standard Ultra battens combined with the additional benefits of selectable colour temperature and wattage. Plug in emergency packs, Microwave and PIR on/off sensors create a very stock friendly solution for wholesalers and contractors alike.

- The ideal replacement for Single/Twin Fluorescent T8 and T5 Fixtures
- Special high light transmission frosted polycarbonate diffuser
- Tool-free termination
- Shatterproof
- Plug in accessories
- Stock friendly product



LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

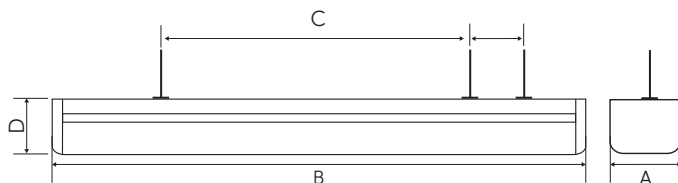

Model	A	B	C (From Centre)	D
20/40W	69mm	1230mm	290mm / 170mm / 320mm	82mm
30/60W	69mm	1530mm	290mm / 170mm / 320mm	82mm
40/80W	69mm	1795mm	415mm / 170mm / 320mm	82mm

W	Colour Temp (K) Selected	Lm
20	3000	2850
	4000	2950
	6000	2960
40	3000	5000
	4000	5400
	6000	5200
30	3000	4100
	4000	4400
	6000	4450
60	3000	7000
	4000	7700
	6000	7550
40	3000	5350
	4000	5650
	6000	5650
80	3000	9850
	4000	10850
	6000	10400

technical@belllighting.co.uk

sales@belllighting.co.uk



LED CCT Integrated Batten

Technical Specification	
Construction	Steel Body, Polycarbonate lens
Driver	BELL
LED Chip	Samsung
IP Rating	IP20
Operating Temp	-30°C to +35°C / Emergency version minimum temperature -5°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 80 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)



LED CCT Integrated Batten

Code	W	Description	Lm	Temp	Hours
10278	20/40	Ultra LED Integrated Batten - CCT, 1200mm (4ft)	2850-5400	3/4/6000K	50000
10279	30/60	Ultra LED Integrated Batten - CCT, 1500mm (5ft)	4100-7700	3/4/6000K	50000
10280	40/80	Ultra LED Integrated Batten - CCT, 1800mm (6ft)	5350-10850	3/4/6000K	50000
10281	-	Plug in Emergency Pack for CCT Battens	-	-	-
10282	-	Plug in Sensor On/Off for CCT Battens	-	-	-
10293	-	Plug in PIR for CCT Battens	-	-	-
10294	-	Remote Control for CCT Battens (PIR only)	-	-	-
91359	-	Plug In Self Test pack for CCT Battens	-	-	-

PIR Max Operating Height 3.2m

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty