


# LED Integrated CCT UGR<19 Batten

The Mentor Wattage Switchable LED integrated CCT Batten is colour selectable with a choice of 3000K, 4000K or 6000K to suit your application. 36 in 1 fitting with plug-in emergency packs, Microwave and PIR on/off sensors available, along with a Dali Dimming version.

- UGR<19
- The ideal replacement for Single/Twin Fluorescent T8 and T5 Fixtures
- Perfect for schools, universities & hospitals where a flexible wattage, selectable colour batten is required
- Suitable for food environments
- High light transmission frosted polycarbonate diffuser for smooth uniform lighting with reduced glare
- Tool-free termination
- Shatterproof
- Up to 142 Lm/W

**LMR80:** Maximum 20% of lumen depreciation over rated hours.

**B10:** Maximum 10% of fittings failure rate over rated hours

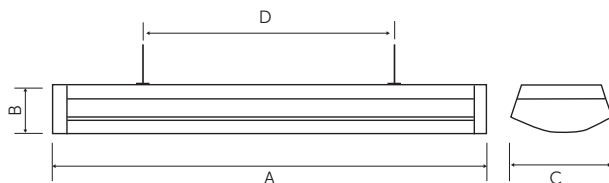

	A	B	C	D
4' Batten	1200mm	97mm	200mm	1000mm
5' Batten	1500mm	97mm	200mm	1300mm



# LED Wattage Switchable, Integrated CCT Batten

Technical Specification	
Construction	Steel Body / Polycarbonate Diffuser
Driver	BELL
LED Chip	Samsung
IP Rating	IP40
Operating Temp	-30°C to +35°C / Emergency version minimum temperature -5°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes

Code	W	Description	Lm	Temp	Hours
10285V2	20/27/33/38	Mentor Wattage Switchable LED Batten CCT, 1200mm (4ft)	2835-5101	3/4/6000K	50000
10286V2	25/34/40/48	Mentor Wattage Switchable LED Batten CCT, 1500mm (5ft)	3473-6481	3/4/6000K	50000
10287	32/42	Mentor Wattage Switchable LED Batten CCT, Dali Dim, 1200mm (4ft)	4100-5600	3/4/6000K	50000
10288	47/55	Mentor Wattage Switchable LED Batten CCT, Dali Dim, 1500mm (5ft)	6100-7850	3/4/6000K	50000
10281	-	Plug in Emergency Pack for above	-	-	-
10282	-	Plug in Microwave Sensor On/Off for above	-	-	-
10293	-	Plug in On/Off PIR for above	-	-	-
10294	-	Remote Control for CCT Battens (PIR only)	-	-	-
91359	-	Plug In Self Test pack for CCT Battens	-	-	-

<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio

<sup>2</sup> Exceeds EU standard of RA 80 for Colour Rendering Index

<sup>3</sup> Subject to terms & conditions (Contact Customer Service)



[technical@belllighting.co.uk](mailto:technical@belllighting.co.uk)  
[sales@belllighting.co.uk](mailto:sales@belllighting.co.uk)