



CASAMBI
Options Available

ArialT-PRO

Troffer Backlit LED CCT Panel


The Arial T-Pro Backlit LED CCT Panel gives a unique twist on a standard LED panel. The contemporary slimline design and aesthetic light distribution works well in areas that would like to move away from the standard familiar panel we have all become accustomed to.

- High efficiency
- Aesthetic light distribution
- Contemporary slimline design
- TPa
- 0-10V Dimming and Dali dimming options available
- Casambi Enabled option available
- Emergency panels with 5-year battery guarantee available




LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

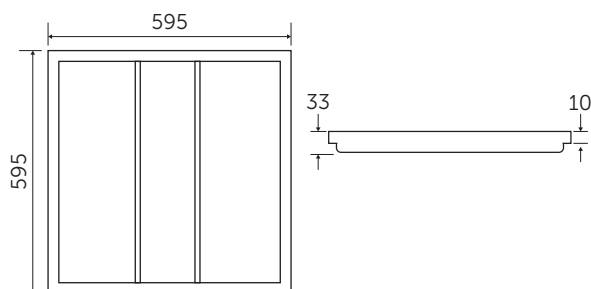

Wattage Selected	Colour Temp (K) Selected	Lumens (lm)
25W	3000	2750
	4000	2950
	6000	2650
36W	3000	4200
	4000	4300
	6000	4050

Selectable Colour Temperature



technical@belllighting.co.uk
sales@belllighting.co.uk

Troffer Backlit LED CCT Panel

Technical Specification	
Construction	Aluminium + PMMA
Driver	BELL
LED Chip	Philips
IP Rating	IP20
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes
Emergency Battery Type	NiCd 1 Year Emergency / LiFePO4 5 Year Emergency

Code	W	Description	Lm/W	Lm	Temp	Finish	Hours
11400	36	Arial Pro Backlit CCT LED Panel 600x600mm	116	4050-4200	3/4/6000K	White	50000
11401	36	Arial T-Pro Backlit CCT LED Panel 600x600mm Emergency	116	4050-4200	3/4/6000K	White	50000
11402	36	Arial T-Pro Backlit CCT LED Panel 600x600mm Dali Dim	116	4050-4200	3/4/6000K	White	50000
11403	36	Arial T-Pro Backlit CCT LED Panel 600x600mm 0-10V Dim	116	4050-4200	3/4/6000K	White	50000
11404	25	Arial T-Pro Backlit CCT LED Panel 600x600mm	110	2650-2750	3/4/6000K	White	50000
11405	25	Arial T-Pro Backlit CCT LED Panel 600x600mm Emergency	110	2650-2750	3/4/6000K	White	50000
11406	25	Arial T-Pro Backlit CCT LED Panel 600x600mm Dali Dim	110	2650-2750	3/4/6000K	White	50000
11407	25	Arial T-Pro Backlit CCT LED Panel 600x600mm 0-10V Dim	110	2650-2750	3/4/6000K	White	50000
08710	-	LED Emergency Pack	-	-	-	-	-

Available on request:

- Emergency 0-10V Dim
- Emergency Dali Dim
- Emergency panels with 5 year battery warranty available

For further information call 01924 893380 or email sales@bellighting.co.uk

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 80 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

