





LED Street Light


The Strada LED Street light offers flexibility, it is suitable for use in many locations, including rural towns, car parks and access roads. A precision lens system directs light only where it is needed, reducing overspill. Three wattages for a variety of applications, robust weatherproof construction with IP66 and IK8 rating.

- Ideal for car parks and pedestrian walkways to ensure safe passage of visitors and staff
- Cool White
- Reduced light pollution
- Precision lens system directs light only where it is needed, reducing overspill
- Long life 50000 hours
- Aerodynamic design for reduced windage
- 60mm Side entry
- Nema socket with blanking plug as standard



LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

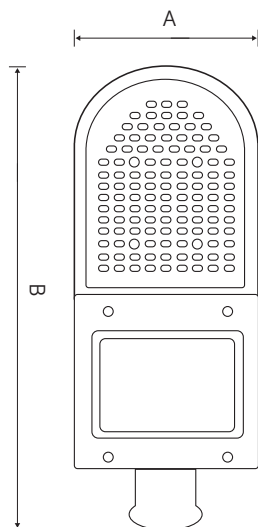

	30W	50W	70W
A	166mm	166mm	202mm
B	478mm	478mm	507mm
Depth	81mm	81mm	88mm



technical@belllighting.co.uk
sales@belllighting.co.uk



LED Street Light

Technical Specification

Construction	Die Cast Marine Grade Aluminium, polycarbonate lens
Driver	Sosen
LED Chip	Samsung
IP Rating	IP66
Operating Temp	-30°C to +35°C
Input Voltage	100-264V
Power Factor	> 0.9
CRI	80 - Exceeds EU standard of Ra 70 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Windage	30W 0.07M ² / 50W 0.07M ² / 70W 0.095M ²

Code	V	W	Lm	Description	Temp	Hours
10753	100-264	30	3900	30W Strada LED Street Light - IP66, Nema Socket	4000K	50000
10754	100-264	50	6500	50W Strada LED Street Light - IP66, Nema Socket	4000K	50000
10755	100-264	70	9100	70W Strada LED Street Light - IP66, Nema Socket	4000K	50000
31139	-	-	-	Strada Photocell	-	-
90494	-	-	-	Strada 200mm outreach arm bracket (single) Fits Ø76mm column top	-	-
90495	-	-	-	Strada 200mm outreach arm bracket (double) Fits Ø76mm column top	-	-
90579	-	-	-	Strada wall mounting bracket	-	-



¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 70 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

