Installation Instructions: 08945V2

Date	Revision
4.3.2024	1

Read these instructions before installation and retain for future reference

This equipment should be installed by a competent electrician

Important Information

We recommend that luminaires are installed by a qualified electrician ensuring the installation complies with current IEE wiring regulations BS7671:2018 & local building control.

- All tests should be carried out in accordance to EN 50172:2004.
- BELL will not accept responsibility for any claims arising from poor installation.
- The light source of this luminaire is not replaceable, when the light source reaches end of life, the whole luminaire must be replaced.

Important User Advice

- The ambient room temperature should not exceed 35°C.
- Ensure that there is adequate free air ventilation around the fitting.
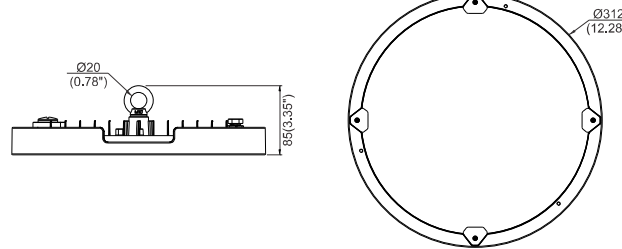- Always switch off mains supply before installing.

AC cords

L	brown	black
N	blue	white
⏚	yellow/green	green

This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery.

Where possible recycle your packaging.

CE UKCA

Physical Dimensions(Unit: mm/inch)

Ø20 (0.78")
Ø312 (12.28")
85(3.35")

| Power	200W
Input Voltage	100-277VAC / 120-277VAC / 100-240VAC / 220-240VAC (Subject to the input voltage on nameplate)
Power Frequency	50 / 60 Hz
Outlook Dimensions	Ø300x70mm(Ø11.81"x2.76")
Luminaire Net Weight	2.0±0.3kg(4.41±0.66Lbs)
Working Temperature	-30℃ to +40℃(-22℉ to +104℉)
Storing Temperature	-40℃ to +70℃(-40℉ to +158℉)

Power Selectable

Caution:
Please power off the luminaire before adjusting the DIP switch.
Please do not use metal tool to adjust the DIP switch.
Please adjust the switch gently.

100W
120W
150W
200W

Suspension Mount

1. 🔧

Recommended Hook Size:
Ø6x60mm/
Ø8x80mm

1. ➡
⬆ 2.

2. 🔧