

Installation Instructions: Apex Ultra CCT Batten

Code: 70447 / 70448 / 70449

This luminaire contains a light source with Energy Rating D

Date	Revision
20.2.26	3



Read these instructions before installation and retain for future reference. This equipment should be installed by a competent electrician



Important Information

We recommend that luminaires are installed by a qualified electrician ensuring the installation complies with current IEE wiring regulations and local building control.

- On emergency fittings, all tests should be carried out in accordance with current emergency lighting regulations.
- BELL Lighting will not accept responsibility for any claims arising from poor installation.

Important User Advice


- The operating temperature should be between -20 and 35°C, and 0 to 35°C for emergency fittings.
- Ensure that there is adequate free air ventilation around the fitting.
- Always switch off mains supply before installing.
- Not suitable for ATEX hazardous zones (explosive atmospheres).
- To ensure optimum performance, keep the front diffuser clean. Wipe with a soft, damp lint free cloth. Do not use soaps, detergents, solvents or abrasive materials.
- Not intended for use by children.

After closing the fitting, ensure the slide locks are in the locked position. Indoor use only, not suitable for outdoor use or areas of high humidity.

This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible, recycle your packaging.



INSTALLATION INSTRUCTIONS

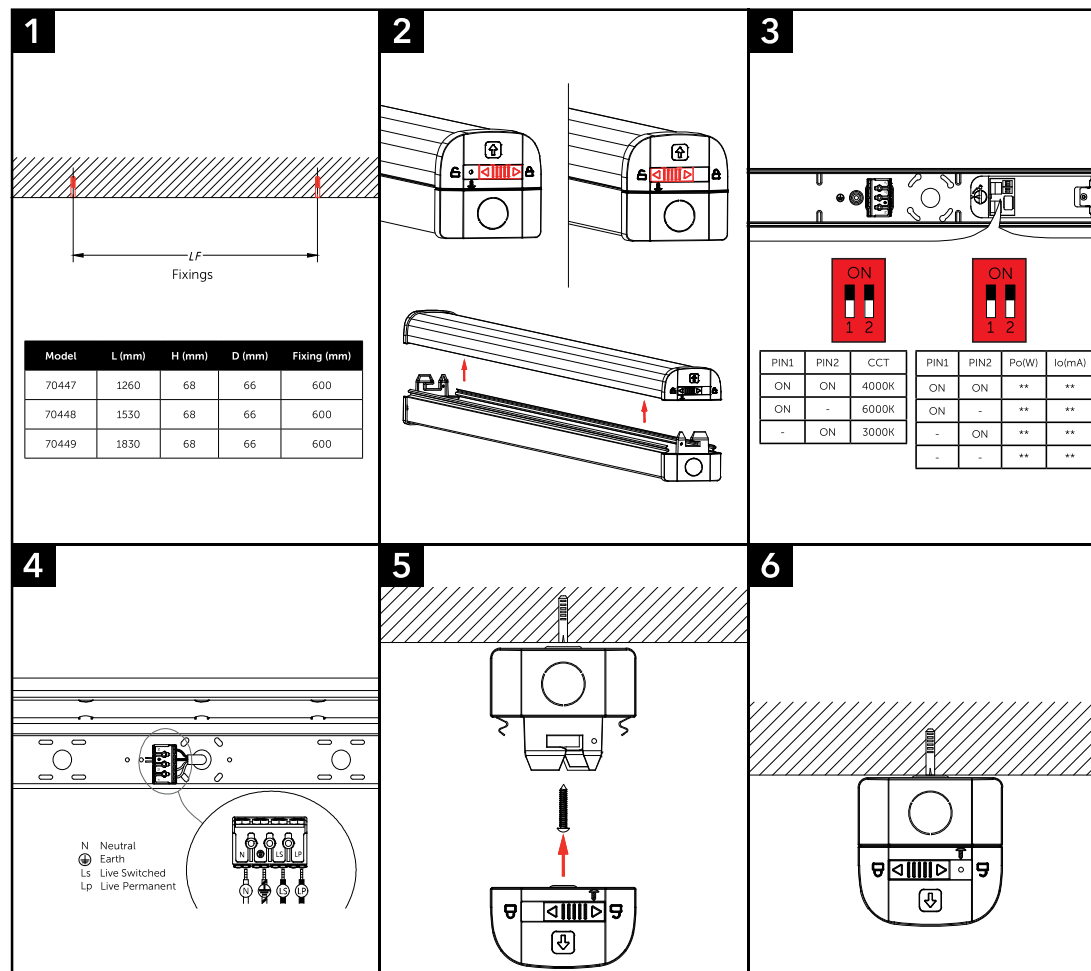

1. Measure the LF distance, drill holes and insert the fixing plugs into the ceiling


2. Open the cover by pushing the slide lock from the locking position to the unlocking position

3. Adjust to the required power setting and CCT level

4. Insert the mains cable through the base or end cap and wire it to the terminal block
Live: Brown
Neutral: Blue
Earth: Yellow/Green or Copper

5. Place the body into position and attach it to the fixing plugs using the screws provided

6. Close and lock the cover in place by pushing the slide lock to the locked pin position

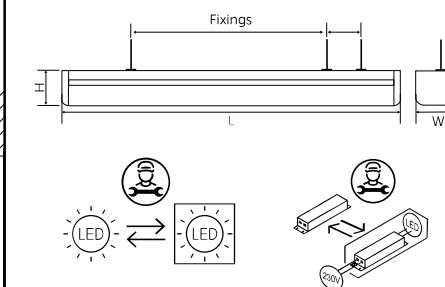

British Electric Lamps Ltd
BELL House, Foxbridge Way, Normanton Industrial Estate
Normanton, West Yorkshire. WF6 1TN

BELL Ireland
Marina House, Clarence Street, Dun Laoghaire
County Dublin, Ireland, A96 AX76

T: +44 (0)1924 893380 F: +44 (0)1924 894320 E: sales@belllighting.co.uk

www.belllighting.co.uk

Technical Helpline +44 (0)1924 893380

Technical@belllighting.co.uk