


## 2W LED Emergency Non Maintained Downlight

- Dual colour charge indicator, complete with driver and battery pack
- Selectable Self Test or Manual Emergency Mode
- Suitable for open area or corridor
- Surface or recessed mount
- 4 in 1 product
- IP20



Product Warranty <sup>3</sup> Including Battery	Water & Dust Protected	Self Test or Manual Emergency Mode	Operating Hours
<b>5 Year</b>	<b>IP20</b>	<b>Mode</b>	<b>50,000</b>

Technical Specification	
Construction	Polycarbonate
LED Chip	Samsung
Input Voltage	220–240VAC, 50 / 60Hz
Power Factor	>0.9
Operating Temp	0°C to +35°C
Standard	CE & UKCA
Battery	LiFePO4

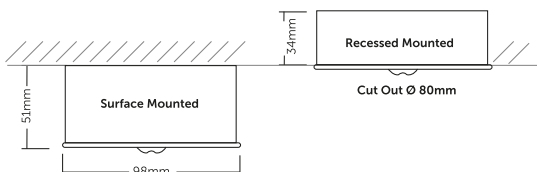



### 5 Year Silver Warranty

Code	W	Description	Temp	Lm	ØxHxCut Out
09126	2	LED Emergency Non Maintained Downlight (Surface Mounted/Recessed), White	6000K	150	98x51x80
09142	2	LED Emergency Non Maintained Downlight (Surface Mounted/Recessed), Black	6000K	150	98x51x80