

LED Emergency 6 in 1 Exit Blade

- Ability to be displayed in 6 different ways; Surface/Suspended/Recessed/Wall/Parallel/Angled Mounting
- Selectable Self Test or Manual Emergency Mode
- Suitable for commercial and industrial installations
- Different legend options available
- Maintained/Non Maintained
- Viewable from both sides
- Viewing distance 25m



Product Warranty³
Including Battery
5 Year


Water & Dust
Protected
IP20


Self Test or
Manual Emergency
Mode

Operating
Hours
30,000

Technical Specification

Construction	Polycarbonate
LED Chip	Samsung
Input Voltage	220-240VAC, 50 / 60Hz
Power Factor	>0.9
Operating Temp	0°C to +35°C
Standard	CE & UKCA
Battery	LiFePO4



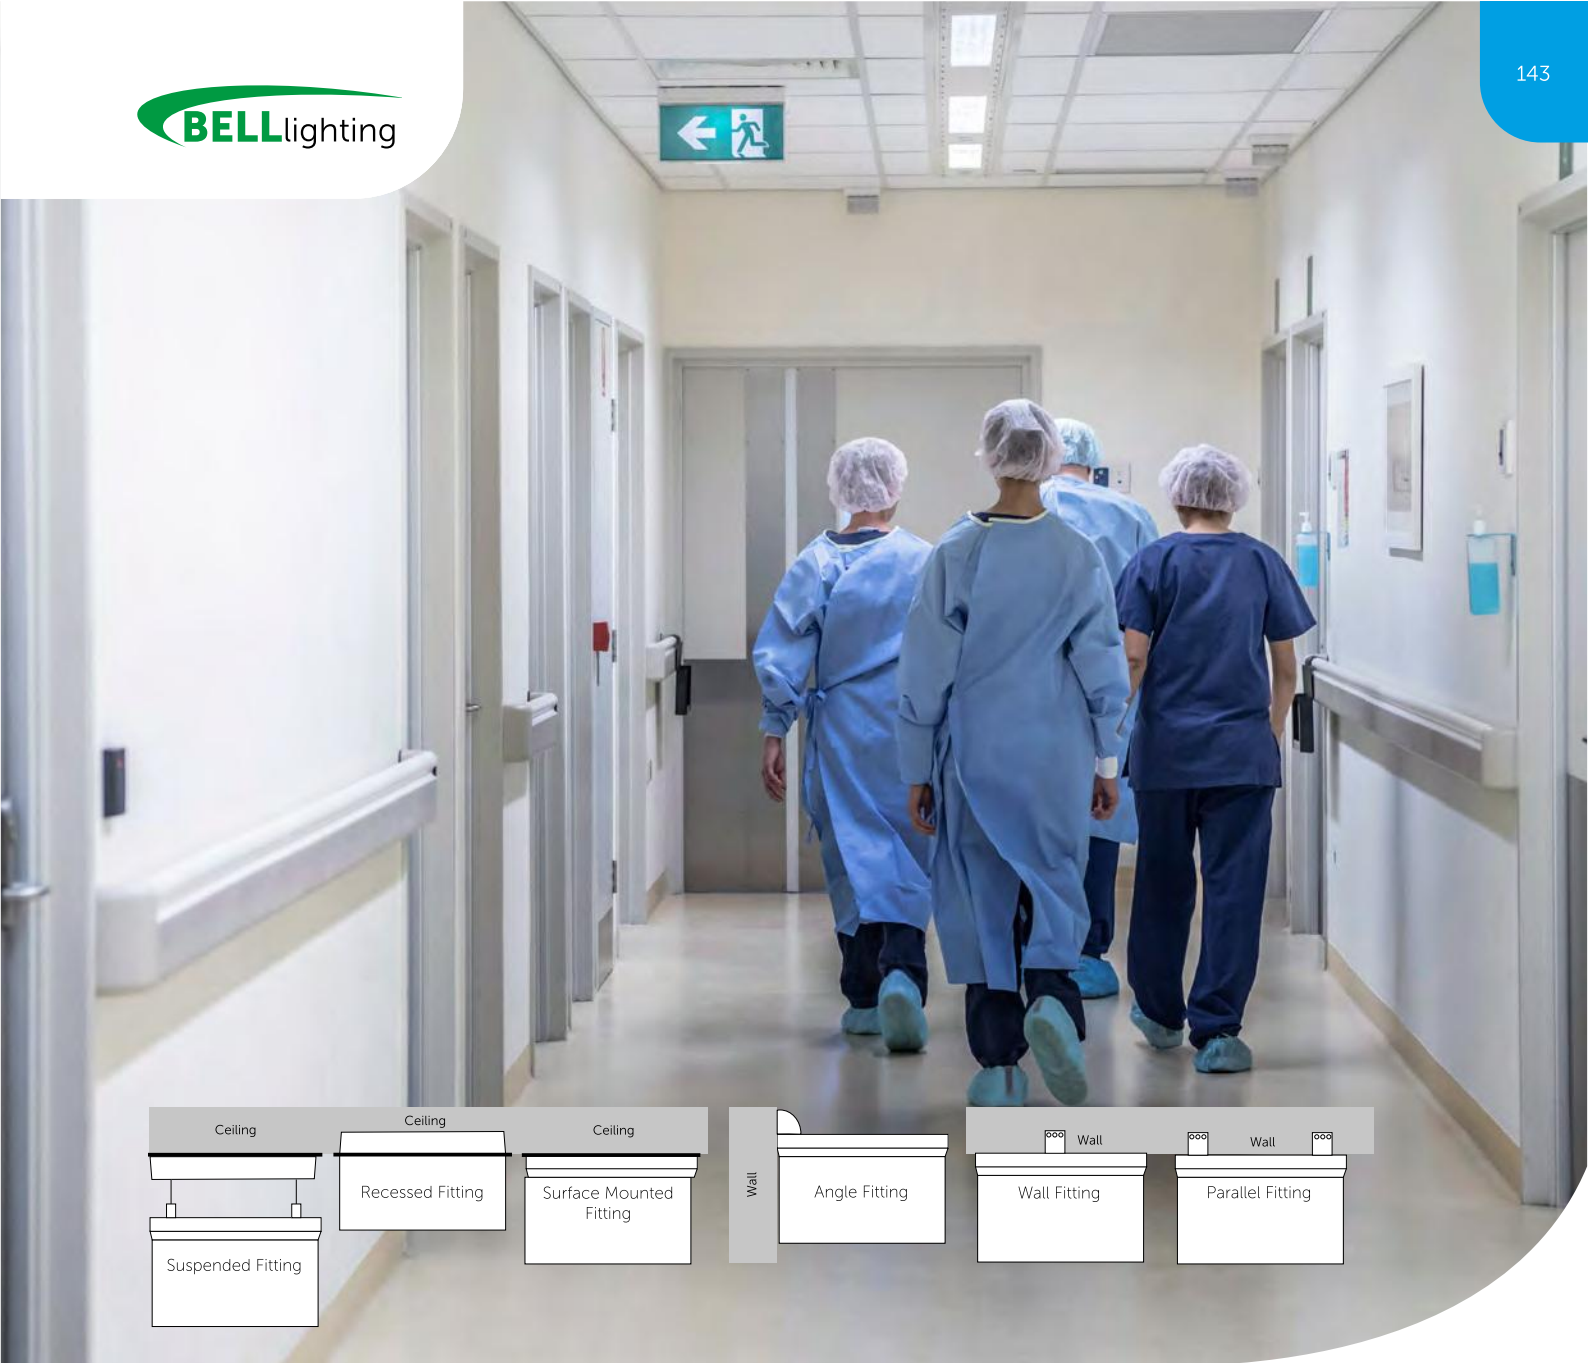

5 Year Silver Warranty

Code	W	Description	Temp	Viewing Distance	WxHxD
09066V2	2	LED Emergency 6 in 1 Exit Blade. Including New (ISO) Up Legend (White Version)	6000K	25M	267x170x34
09130	2	LED Emergency 6 in 1 Exit Blade. Including New (ISO) Up Legend (Black Version)	6000K	25M	267x170x34
09154	2	LED Emergency 6 in 1 Exit Blade. Including New (ISO) Up Legend (White Version) DALI-2 Addressable - Self Test	6000K	25M	267x170x34
09067V2	-	New Legend Reversible Left & Right	-	-	-
09068V2	-	New Legend Down	-	-	-

Legend Options



09067 New (ISO) Legend Reversible Left & Right

09068 (ISO) New Legend Down