

ArialT-pro multi

Troffer Backlit LED CCT Panel


- Emergency panels with 5-year battery warranty available
- 1-10V dimming and DALI-2 dimming options available
- Casambi Enabled option available
- Contemporary slimline design
- Aesthetic light distribution
- Wattage switchable
- High efficiency
- TPa

CASAMBI



Panel Warranty ² 7 Year	On site Warranty ² 2 Year	Battery Warranty ¹ Emergency Versions 1 Year	Colour Rendering Index ² 80	Lumens Maintenance Ratio ² L80 B10	Low Unified Glare Rating UGR <19	Water & Dust Protected IP20	Operating Hours 50,000
--	--	--	--	---	---	---------------------------------------	----------------------------------

Technical Specification	
Construction	Aluminium + PMMA
Driver	BELL
LED Chip	Philips
Input Voltage	220–240VAC, 50 / 60Hz
Power Factor	>0.9
Operating Temp	-20°C to +35°C (Emergency version min temp 0°C)
Standard	CE & UKCA

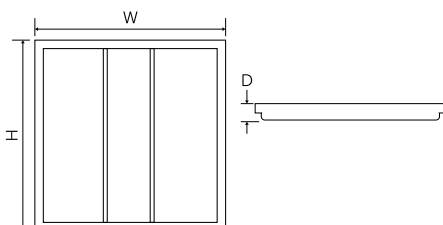



7 Year Gold Warranty

Code	W	Description	Lm	Temp	WxHxD (mm)
11415	20/26/30/36	UGR Troffer Panel - 600x600mm, CCT	2250-3950		
11416	20/26/30/36	UGR Troffer Panel - 600x600mm, CCT, Emergency 1 year		3/4/6000K	595x595x33
11418	36	UGR Troffer Panel - 600x600mm, CCT, 1-10V	3950		
11417	36	UGR Troffer Panel - 600x600mm, CCT, DALI-2			
08747V2	-	Arial Stand-Alone 5 Year Emergency Pack - Self Test/Non Self Test		-	-
09156	-	DALI-2 Self Test/Non Self Test 10-300V Emergency Pack	-	-	-
30024	-	Burgess Ceiling Grid Bracket Kit for LED Panels	-	-	-

Available on request:

- Emergency 1-10V dim
- Emergency DALI-2 Dim
- Emergency panels with 5 year battery warranty available

For further information call 01924 893380 or email sales@bellighting.co.uk

Lumens based on 4000K