





## LED Retrofit T5/T8 Magnetic T-Bar

- Magnetic T-Bar attaches to existing fitting meaning there is no need for removal of existing fixtures
- Retrofit solution for existing old T5/T8 installations
- Includes separate driver
- Single & twin options
- Available in 4ft & 5ft
- Emergency options
- DALI-2 as standard
- Ideal for areas where 'No Mess' is essential
- Turns a Fluorescent batten in to DALI-2 Dimmable

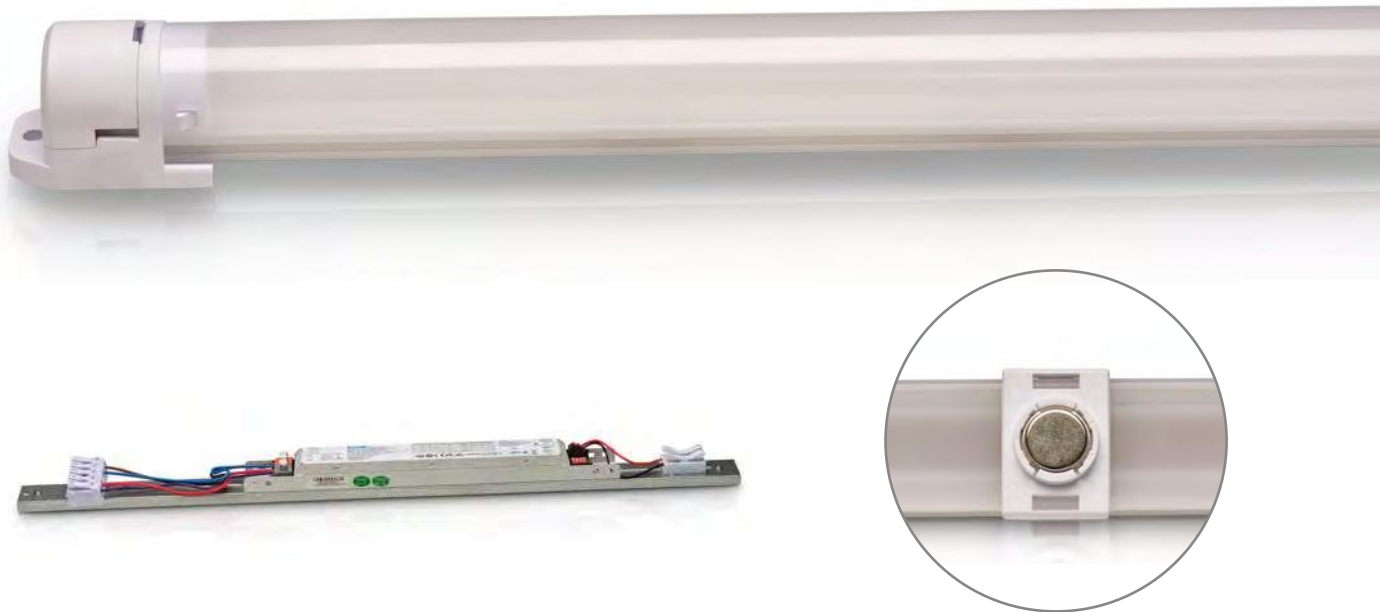

Quality Assured Product Warranty <sup>2</sup>	On site Warranty <sup>2</sup>	Colour Rendering Index <sup>2</sup>	Lumens Maintenance Ratio <sup>2</sup>	Water & Dust Protected	Impact Rating	Operating Hours
<b>5 Year</b>	<b>2 Year</b>	<b>80</b>	<b>L80 B10</b>	<b>IP20</b>	<b>IK6</b>	<b>50,000</b>

Technical Specification	
Construction	Steel Body, Polycarbonate lens
Driver	Boke
LED Chip	Samsung
Input Voltage	220-240VAC, 50 / 60Hz
Power Factor	>0.9
Operating Temp	-20°C to +35°C (Emergency version min temp 0°C)
Standard	CE & UKCA





### 5 Year Silver Warranty

Code	W	Description	Lm	Temp	LxH (mm)
60920	15/20	T5/T8 Magnetic T-Bar - 4ft Single Pack	2250-3200	3/4000K	1129x27.5x27.5
60921	30/40	T5/T8 Magnetic T-Bar - 4ft Twin Pack	4500-6400	3/4000K	1129x27.5x27.5
60922	20/28	T5/T8 Magnetic T-Bar - 5ft Single Pack	3000-4480	3/4000K	1429x27.5x27.5
60923	40/56	T5/T8 Magnetic T-Bar - 5ft Twin Pack	6000-8960	3/4000K	1429x27.5x27.5
60924	-	T5/T8 Magnetic T-Bar - Emergency Pack	-	-	-

Lumens based on 4000K