

LED Wattage Switchable CCT Surface/Suspended Linear

- Tailored Light distribution - Downward only or Up-Down (75:25) light options available
- Flexible Lighting layout - Standalone or Linkable (with and without link section)
- Versatile Mounting - both surface & suspended mounting versions available
- Switchable settings - 2 Power select & 3 CCT 3000K/4000K/5000K
- Ideal for general offices, commercial spaces and open areas
- DALI-2 Dimming, Emergency & CASAMBI options available
- Ease of Installation - Loop-In Loop-out
- UGR <19*





CASAMBI



Quality Assured Product Warranty ² 7 Year	On site Warranty ² 2 Year	Colour Rendering Index ² 80	Lumens Maintenance Ratio ² L80 B10	Water & Dust Protected IP20	Flicker Free Driver	Operating Hours 50,000
--	--	--	---	---------------------------------------	-------------------------------	----------------------------------

Technical Specification	
Construction	Steel + Polycarbonate
Driver	BOKE
Operating Frequency	50/60Hz
Input Voltage	220-240VAC
Power Factor	>0.9
Operating Temp	-20°C to +35°C
Standard	CE & UKCA

Configurations when using Link Section for Continuous Mount
(code 70108) Sold separately

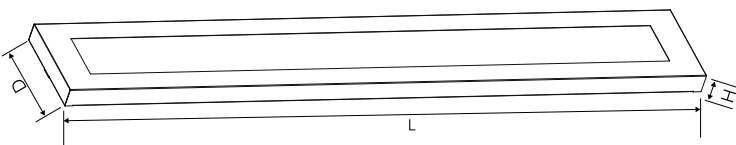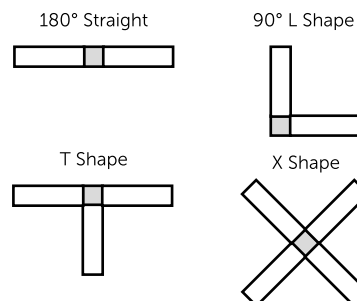



7 Year Gold Warranty

Code	W	Description	Lm	Temp	LxDxH (mm)
70100	17/30	Surface Linear 100% Down - CCT, 1200mm (4ft) - Includes Suspension and Surface Mount Kit			
70101	17/30	Surface Linear 100% Down - CCT, 1200mm (4ft), Emergency - Includes Suspension and Surface Mount Kit	1950-3300	3/4/5000K	1274x186x37
70102	17/30	Surface Linear 75% Down 25% Up - CCT, 1200mm (4ft) - Includes Suspension and Surface Mount Kit			
70103	17/30	Surface Linear 75% Down 25% Up - CCT, 1200mm (4ft), Emergency - Includes Suspension and Surface Mount Kit			
70104	22/40	Surface Linear 100% Down - CCT, 1500mm (5ft) - Includes Suspension and Surface Mount Kit			
70105	22/40	Surface Linear 100% Down - CCT, 1500mm (5ft), Emergency - Includes Suspension and Surface Mount Kit	2250-4400	3/4/5000K	1574x186x37
70106	22/40	Surface Linear 75% Down 25% Up - CCT, 1500mm (5ft) - Includes Suspension and Surface Mount Kit			
70107	22/40	Surface Linear 75% Down 25% Up - CCT, 1500mm (5ft), Emergency - Includes Suspension and Surface Mount Kit			
70108	-	Link Section for Continuous Mount	-	-	-

Lumens based on 4000K