

Wattage Switchable Sports Lighting

- Integrated wire guard, conforms to DIN 57710-13 Ball Test
- Perfect for all indoor sports applications
- Suspension & ceiling mounting options
- Wattage switchable 100W/150W/200W
- Emergency option available
- CASAMBI option available
- Quick Fix wiring design
- DALI-2 as standard



CASAMBI



100W \equiv 250 W MH/SON Energy Saving 60% 150W \equiv 400 W MH/SON Energy Saving 63% 200W \equiv 600 W MH/SON Energy Saving 66%

Quality Assured
Product Warranty²
7 Year

On site
Warranty²
2 Year

Colour Rendering
Index²
80

Lumens
Maintenance Ratio²
L80 B10

Water & Dust
Protected
IP23


Surge
Protected
6000V

Impact
Rating
IK10

Operating
Hours
50,000

Technical Specification

Construction	Aluminium body, Polycarbonate lens
Driver	Sosen DALI-2 Dimmable
LED Chip	LED 2835
Input Voltage	220-240VAC, 50 / 60Hz
Power Factor	>0.9
Operating Temp	-20°C to +35°C
Standard	CE & UKCA

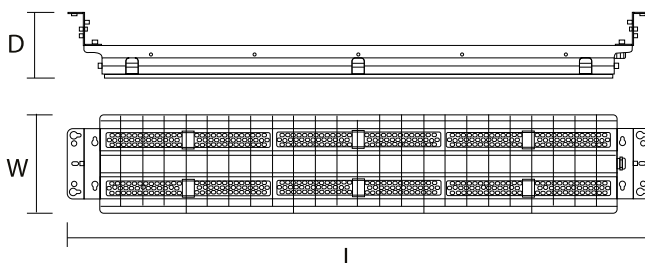

technical@bellighting.co.uk
sales@bellighting.co.uk



7 Year Gold Warranty

Code	W	Description	Lumens (Up to)	Temp	Lm/W (Up to)	Weight	LxWxD (mm)
70360	100/150/200	Illumina Icon Wattage Switchable Symmetric Linear - DALI-2	15,405-30,810				
70361	100/150/200	Illumina Icon Wattage Switchable Asymmetric Linear - DALI-2	15,397-30,593				
91718	100/150/200	Illumina Icon Wattage Switchable Symmetric Linear - DALI-2. Emergency version	15,405-30,810	4000K	154	8.6Kg	1320x238x76
91720	100/150/200	Illumina Icon Wattage Switchable Asymmetric Linear - DALI-2. Emergency version	15,397-30,593				
70363	-	Adjustable Bracket for Illumina Icon	-	-	-	-	-
70364	-	Suspension Mount Kit for Illumina Icon	-	-	-	-	-