




LED CCT Converter/Large Converter

- Converter fits cut-outs 65mm-205mm - Large converter fits cut-outs 120mm-260mm
- Unrivalled product when it comes to versatility in the LED market
- Integral switches for multiple wattages and CCT
- Switchable colour temperature 3000K/4000K/6000K
- Fully adjustable/innovative bracket
- Emergency pack available
- Switchable wattage 10W/13W/16W & 16W/20W/22W
- All in one solution
- Recessed or Surface Mounted in one fitting



Panel Warranty*	On site Warranty*	Battery Warranty* Emergency Versions	Colour Rendering Index*	Lumens Maintenance Ratio*	Water & Dust Protected	Operating Hours
5 Year	2 Year	5 Year	80	L80 B10	IP20	50,000
Exc Battery	Exc Battery					

Technical Specification	
Construction	Polycarbonate
Driver	BELL
LED Chip	Samsung
Input Voltage	220-240VAC, 50 / 60Hz
Power Factor	>0.9
Operating Temp	-20°C to +35°C (Emergency version min temp 0°C)
Standard	CE & UKCA

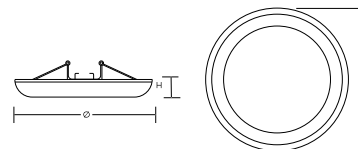



5 Year Silver Warranty

Code	W	Description	Lm	Temp	HxØ (mm)
06840	10/13/16	LED Converter - Wattage Switchable, CCT 65mm-205mm cut out			
06836	10/13/16	LED Converter - Wattage Switchable, CCT 65mm-205mm cut out, PIR Sensor. Not suitable for Emergency	1164-2166	3/4/6000K	16x235
06846	10/13/16	Arial LED Converter - Wattage Switchable, CCT 65mm-205mm cut out, Emergency			
06839	16/20/22	Arial LED Converter - Wattage Switchable, CCT 120mm-260mm cut out			
06842	16/20/22	Arial LED Converter - Wattage Switchable, CCT 120mm-260mm cut out, with PIR Sensor. Not suitable for Emergency	2296-3396	3/4/6000K	25x300
06847	16/20/22	Arial LED Converter - Wattage Switchable, CCT 120mm-260mm cut out, Emergency			

Lumens based on 4000K