TECHNICAL DATA SHEET

DRY LINING BOXES


- **Suitable for use in cavity walls 16mm - 30mm deep**
- **Made from Polycarbonate**
- **BS 5733**



DL1N



DL2N



DL147N


	DL1N	DL2N	DL147N	DL247N	DLCN	DLDN
Description	1 Gang - 35mm Deep	2 Gang - 35mm Deep	1 Gang - 47mm Deep	2 Gang - 47mm Deep	1 Gang Circular 32mm Deep, 58.4mm Inner dimensions, 78.6mm Outer Dimensions	Dual Box - 35mm Deep
Max Wall/Plasterboard Thickness	16mm	16mm	30mm	30mm	20mm	20mm
K.O Dimensions	1 x 25mmØ	1 x 25mmØ	1 x 25mmØ	1 x 25mmØ	2 x 20mmØ	2 x 25Ø
Cable Entry Dimensions	2 x 16 x 26mm	2 x 16 x 26mm	2 x 16 x 26mm	2 x 16 x 26mm	N/A	6 x 16 x 26mm
PK Qty	10	10	20	10	10	10
Guarantee	1 year					
Certification & Conformity	BS 5733	BS 5733	BS 5733	BS 5733	BS 5733	BS 5733



DL247N



DLCN

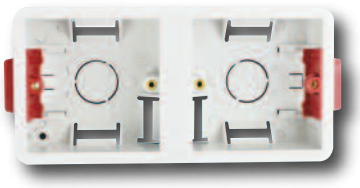

DLDN

GREEN BROOK ELECTRICAL
Tel +44 (0) 1279 772 772
Fax +44 (0) 1279 422 007
www.greenbrook.co.uk

CE