
elucian


Technical Specification

Product Code: CU4RCD63B

Description: 4 Pole 63A 30mA (Type B) RCCB



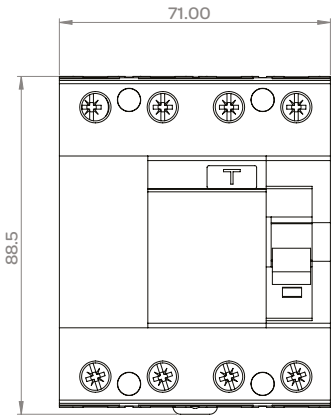

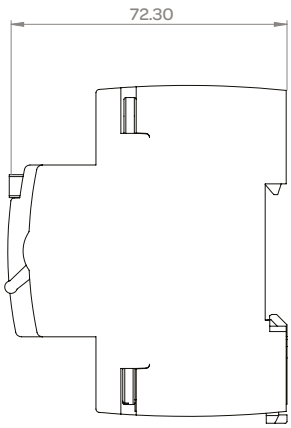

General Information

Dimensions (mm)	71.2 (W) x 85.2 (H) x 70 (D)
Colour	Light Grey
Rated Operational Voltage (AC) (Ue)	400/415
Frequency (Hz)	50/60
Maximum Rated Current (A) (In)	63
Impulse Withstand Voltage (Uimp)	4000
Type	B
Rated Making & Breaking Capacity (A) (Im)	630
Tripping Current (mA) (in)	30
Residual Non-Operating Current (IΔn)	0.5
Endurance Operations	2000 'ON' & 1000 'OFF' Cycles
Trip Type	Electro-Magnetic Release
Device Terminals	Screwed Lug & Pin
RCD Terminal Capacity (mm²)	35
RCD Terminal Torque (Nm)	2.5
Number Of Poles	4 (3+N)
Ingress Protection	IP20
Operational Temperature (°C)	-25 to +40
Warranty (Years)	3

Standards BS EN 61008-1

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

Compatible Accessories TPRCDLINK:Three phase RCD Link Kit

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

Catalogue Range DoC