JCC | a LEVITON company



About Us

Leviton is a world leader in diversified electrical technologies and the largest privately owned manufacturer of electrical wiring equipment in North America.

Leviton products help customers create sustainable and intelligent environments through their electrical wiring devices, network and data centre connectivity solutions, lighting energy management systems, and security and automation applications.

Operating in over 80 countries and with a portfolio of more than 25,000 products, Leviton are at the forefront of global developments in building technology and are uniquely positioned to support JCC in developing cutting edge LED innovation.

Leviton acquired JCC in 2013 to enhance JCC's position as the UK market leader in LED lighting and strengthen our shared vision to ensure accessibility to the benefits of the latest LED technology.

Established in 1989, JCC are market leaders in the development of cutting edge LED lighting technology.

We are driven by our passion to create innovative LED lighting solutions. This ensures that our customers can take advantage of the benefits that the latest LED technology can provide for both domestic, commercial and industrial applications.

We believe that LED lighting is the most effective way that homes and businesses can tackle rising energy costs and the global need to reduce CO_2 consumption.

LED technology provides us with the opportunity to readdress traditional lighting and create innovative solutions that can improve installation times, enrich our homes, increase productivity within the workplace and enhance safety across all environments.





Welcome to Catalogue 36

Please contact us for further information and advice on any of the products within our catalogue. To find your local JCC sales representative please see inside back cover.

CUSTOMER SERVICES: +44 (0)1243 838999 | customer.services@jcc.co.uk

TECHNICAL SUPPORT: technical.support@jcc.co.uk

Contents

Introduction	4	LED Strip	336
Fire-rated Downlights	16	Bulkheads	364
Downlights	74	Exterior Wall & Garden	398
LED Panels	128	Floodlights	442
Commercial & Office	154	Bollards	484
Battens & Weatherproofs	198	Controls & Sensors	510
Industrial	254	Technical	526
Emergency	284	Spares	544
Spotlights & Track Systems	306	Index	548

JCC Lighting are carbon neutral

We're proud to announce that JCC Lighting have become a carbon neutral organisation.

In 2022, Leviton announced its climate change goal to achieve company-wide carbon neutrality by 2030 and its ambition to achieve Net-Zero Carbon by 2050.

We are proud to announce that JCC Lighting has become a carbon neutral organisation, 7 years ahead of the 2030 target. This significant milestone takes Leviton's commitment to becoming a carbon neutral group another step forward.



Net-zero by 2050

We aim to achieve net-zero across all Leviton business units.

1280 Solar Panels

Have been installed on the roof of our Lux Park head office.

200 tCO2e

Saved through JCC's cumulative **green team initiatives.**

20,000,000+

LED light fittings have been sold by JCC since 2011.

210,000 tCO2e

We estimate that Leviton has **globally avoided and reduced 210,000 tCO2e** through our reduction initiatives and offset investments.

250,000ft²

The Lux Park grounds span over 250,000ft² allowing us to maintain strong stock holdings on-site, **providing next day delivery** for our customers.



Designed with electricians, for electricians

Building our product design briefs directly from the feedback provided by our contractor customers is fundamental to our design and development culture. Each comment or conversation point becomes an objective of the design brief, ensuring that our products provide the maximum benefit to all of our customers. This feedback has had a significant impact on product development and now all key ranges are developed with the following aspects in mind:

- ✓ **Speed & ease of installation**
- ✓ **Breadth of range & availability**
- ✓ **Versatility of application**



How do we produce products that are the easiest to install for contractors?



Trade shows & events

Trade shows and events yield a high volume of feedback, highlighting universal issues and offering insight into the essential feature and benefit requirements.



Focus group sessions

These sessions offer more focused discussions with ample time to address issues, gather a high volume of data, and select specific contractors for products.



On-site install

This enables us to see the existing work arounds, areas of opportunity the contractors may not have realised, and demonstrates the real-time implications of issues.



Prototype & concept review

We collaborate with contractors to refine designs, utilising in-house 3D printing for multiple iterations, and ensure the product is perfected before starting mass production.

Have your say, join our contractor feedback program: **jccpro@jcc.co.uk**

End to end project support

A trusted partner for lighting designers

JCC are a trusted partner for lighting designers, specifiers, architects and contractors, with a wide product portfolio that has been in-house and third party tested to provide reassurance of performance.

Free internal lighting design service

With expert knowledge of the JCC product portfolio and all sectors, our in-house lighting designers can produce detailed calculations and drawings in accordance with CIBSE, BS 5499 and BS 5266-1 guidelines and standards.

Diverse product range for multiple applications

We offer a wide range of products for industrial, commercial, and residential use. Our in house production team can customise and convert products into DALI, controls and sensing variants.

Site visits & support from our nationwide sales team

Our external sales team supports UK electrical wholesalers with site visits, project support, fast quotes, and cost-saving calculations, backed by our Centralised Sales Team.

Photometry available via Relux database RELUX®

JCC are a member of Relux, with fully up to date photometry available across the Relux database and jcc.co.uk for all JCC products.

Highly trained customer service support

Our expert Customer Service and Technical Support teams are just a phone call away, ready to assist with your product, service, or sales enquiries.



Our team of experts are on-hand to provide customised, dedicated support for you throughout the process. From concept to completion to aftercare.



In-house photometric validation using our goniophotometer.

Advanced QC, in-house and third-party testing

All JCC products are third-party tested by independent laboratories including the LIA (Lighting Industry Association). In addition, our state-of-the-art in-house testing facility provides assurance of product performance across all key areas.

Our in-house testing allows us to fully test product performance including thermal, electrical safety, detailed harmonics, live switching, and photometry, ensuring the highest quality products for our valued customers.

- ✓ **Lifetime performance testing**
- ✓ **Battery capacity testing**
- ✓ **Dimming testing with the most common dimmers**
- ✓ **LED chip, driver performance and thermal testing**
- ✓ **Saline test to recreate environmental deterioration**
- ✓ **Glow wire testing to assess heat resistance from electrical faults**
- ✓ **Clare electrical safety testing**
- ✓ **Switch cycle testing**
- ✓ **Needle flame testing to test heat resistance from external sources**

LIA LAB CERTIFICATION
003-0010

Simple warranty, with no small print

At JCC Lighting, we take pride in our products' quality and reliability. All JCC products are covered by our **3**YR, **5**YR or **7**YR warranties.



2-year on-site warranty available

We will undertake a pre-assessment of your project prior to installation and discuss your warranty options. In the unlikely event of a defect or malfunction, we can offer a customised on-site warranty service at no additional cost. Simply contact your local ASM and discuss your requirements.

To register your warranty, visit: **jcc.co.uk/warranty**



NEW
Products & upgrades

A quick reference to the exciting new products and upgrades in Catalogue 36.



Parluma

See p.78



Rakula

See p.86



Skydisc™ CCT

See p.92



Skytile® Direct/Indirect

See p.148



Line of Light

See p.156



Ring of Light

See p.178



Skypack™ Pro CCT

See p.213



ToughLED™ Pro CCT

See p.232



Toughbay™ Pro DALI CCT

See p.265



Retail Pendant

See p.268



LED Post Top

See p.278



Streetlight

See p.280



EscapeLUX™
Exit Box
See p.288



EscapeLUX™
Exit Blade
See p.289



EscapeLUX™
5-in-1 Exit Blade
See p.290



EscapeLUX™
Twin Spot 9W
See p.292



EscapeLUX™
Twin Spot 3W & 2W
See p.293



EscapeLUX™
Bulkhead IP66
See p.295



EscapeLUX™
High Output Bulkhead IP66
See p.296



EscapeLUX™
Surface Downlight
See p.297



EscapeLUX™
Downlight IP65
See p.298



EscapeLUX™
Recessed Downlight
See p.299



EscapeLUX™
Recessed Downlight
See p.300



EscapeLUX™
Track Downlight
See p.301



Exterior Wall Lights
See p.400



Toughflood™ Pro
See p.456



Toughflood™ Pro Marine
See p.466



Bollards
See p.486

Fire-rated Downlights

Leading Fire Safety and Certification	18
X50®	22
V50™	28
V50™ Tilt IP20	31
V50™ Accessories	32
V50™ Pro Retrofit	34
V50™ Pro Plaster-in	42
V50™ Pro Anti-Glare	48
Fireguard® Next Generation	52
Fireguard® Next Generation Tilt	58
Fireguard® Next Generation Anti-Glare	60
Fireguard® Next Generation Concealer	64
Fireguard® GU10 Plaster-in	68



Over 20 Years of industry-leading fire safety and certification

JCC fire rated downlights have been tested for use in solid, I-Joist and steel open web Joist ceiling construction types and adhere to Part B, C and E of the building regulations.

See the individual product pages to see which joist types have been tested for each product range, or visit JCC.co.uk to see test certificates. It is the responsibility of the installer to ensure compliance with all relevant regulations.

Some of the trusted companies we use include:

STAIRCRAFT · wolf · Metsä · PEUTZ · James Jones & SONS LIMITED TIMBER SYSTEMS DIVISION

For the latest test certificates, search the product code at jcc.co.uk

Solid joist

Conventional solid timber joists are the traditional ceiling joists which are typically used in older, existing domestic buildings. They are widely found within internal floor and separating constructions.



I-Joist

I-Joists are strong, lightweight wooden joists intended for domestic applications, and are used in new builds throughout the UK. They continue to grow in popularity as they have greater strength to weight ratio and are less likely to bow compared to other options.



Steel open web joist

Steel open web or POSI joists combine the lightness of timber with the strength of a strut steel web, allowing you to span far greater distances than alternative timber products. This can be used across a wide range of applications including domestic, industrial and commercial.



PART B

Fire safety, providing suitable protection for people to escape buildings with the time gained by having provisions in place.

PART C

Resistance to contaminants and moisture, preventing moisture or contaminants from passing through a downlight into voids.

PART E

Resistance to the passage of sound to ensure that people have a reasonable degree of acoustic privacy in their homes.



Fire-rated regulations explained

Fire-rated downlight regulations are in place to protect buildings from the fire risk created when a hole is drilled to fit a downlight.

Products are designed to seal this hole, meaning the fire is slowed down, however they do not block the fire completely. Instead, they maintain a level of fire resistance similar to the original ceiling, enhancing overall safety by combining functional lighting with essential protective measures.

Fire-rated downlights are most commonly rated at 30, 60 or 90 minutes, allowing occupants time to get to safety. Plasterboard thickness and joist spacing within the ceiling vary depending on the required level of fire rating. These are generally determined by building height and use.

MINIMUM PERIODS OF FIRE RESISTANCE FOR DOMESTIC PROPERTIES

30

30 MIN. CEILINGS
600mm joist centres
Single layer
12.5mm plasterboard

60

60 MIN. CEILINGS
600mm joist centres
Double layer
15mm plasterboard


90

90 MIN CEILINGS
450mm joist centres
Double layer
15mm plasterboard

Building type requirements

Different buildings types have different requirements, and the rating varies depending on the floor level at which the fire-rated downlight has been fitted:

	Height of top floor above ground level			Basement depth	
	5m or less	18m or less	30m or less	10m or less	More than 10m
Not sprinklered residential flats	30 m in	60 min	90 min	60 min	90 min
Sprinklered residential flats	30 min	60 min	90 min	60 min	90 min
Institutional	30 min	60 min	90 min	60 min	90 min
Other residential	30 min	60 min	90 min	60 min	90 min

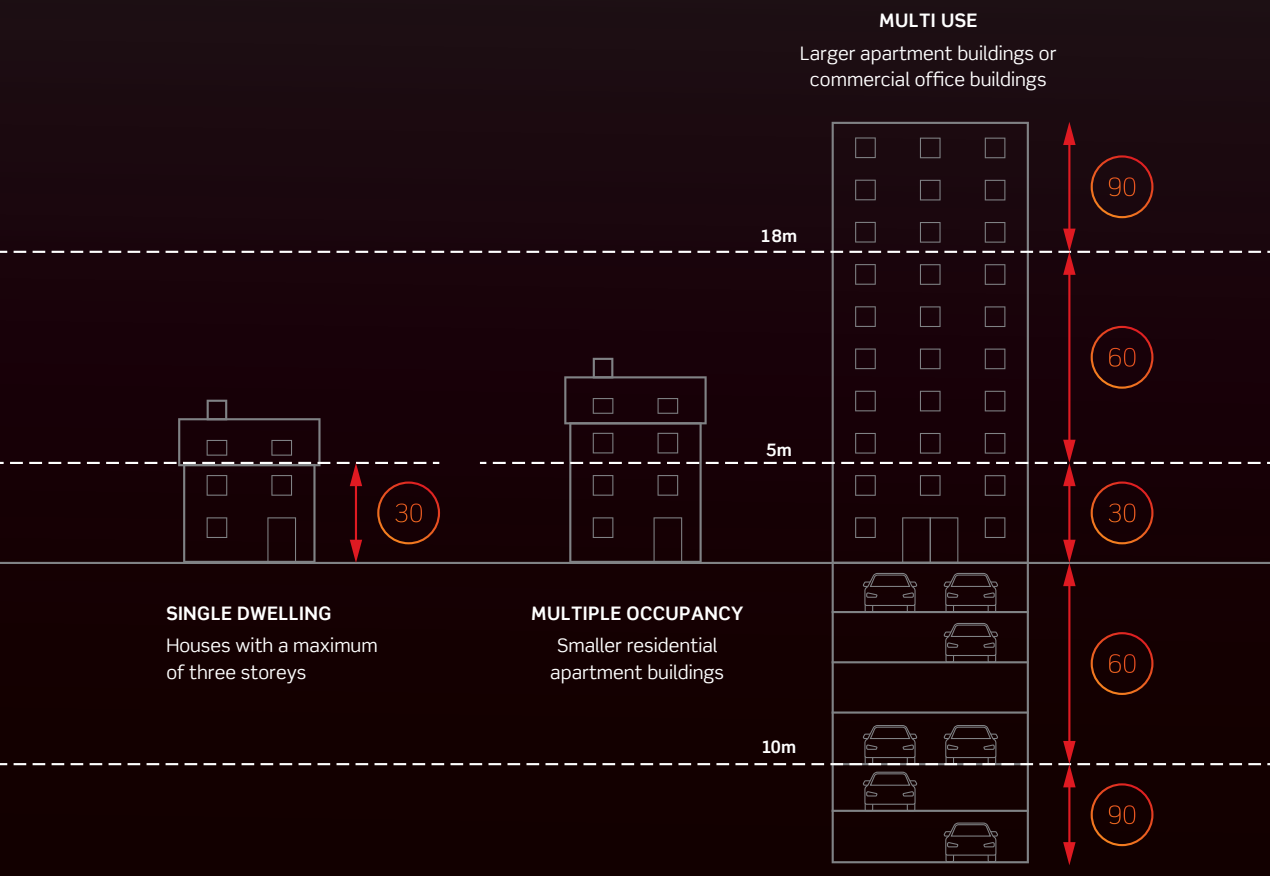

X50®

Wattage and colour selectable fire-rated LED downlight

TWO WATTAGE & THREE COLOUR SELECTABLE



TWO-PART, DOUBLE HINGED CONNECTOR




SIX INTERCHANGEABLE BEZEL OPTIONS



Unique easy access resistance testing terminals*

Secure plug and play connection, allows for first fix termination. Includes three easy access probe testing terminals for insulation resistance testing.

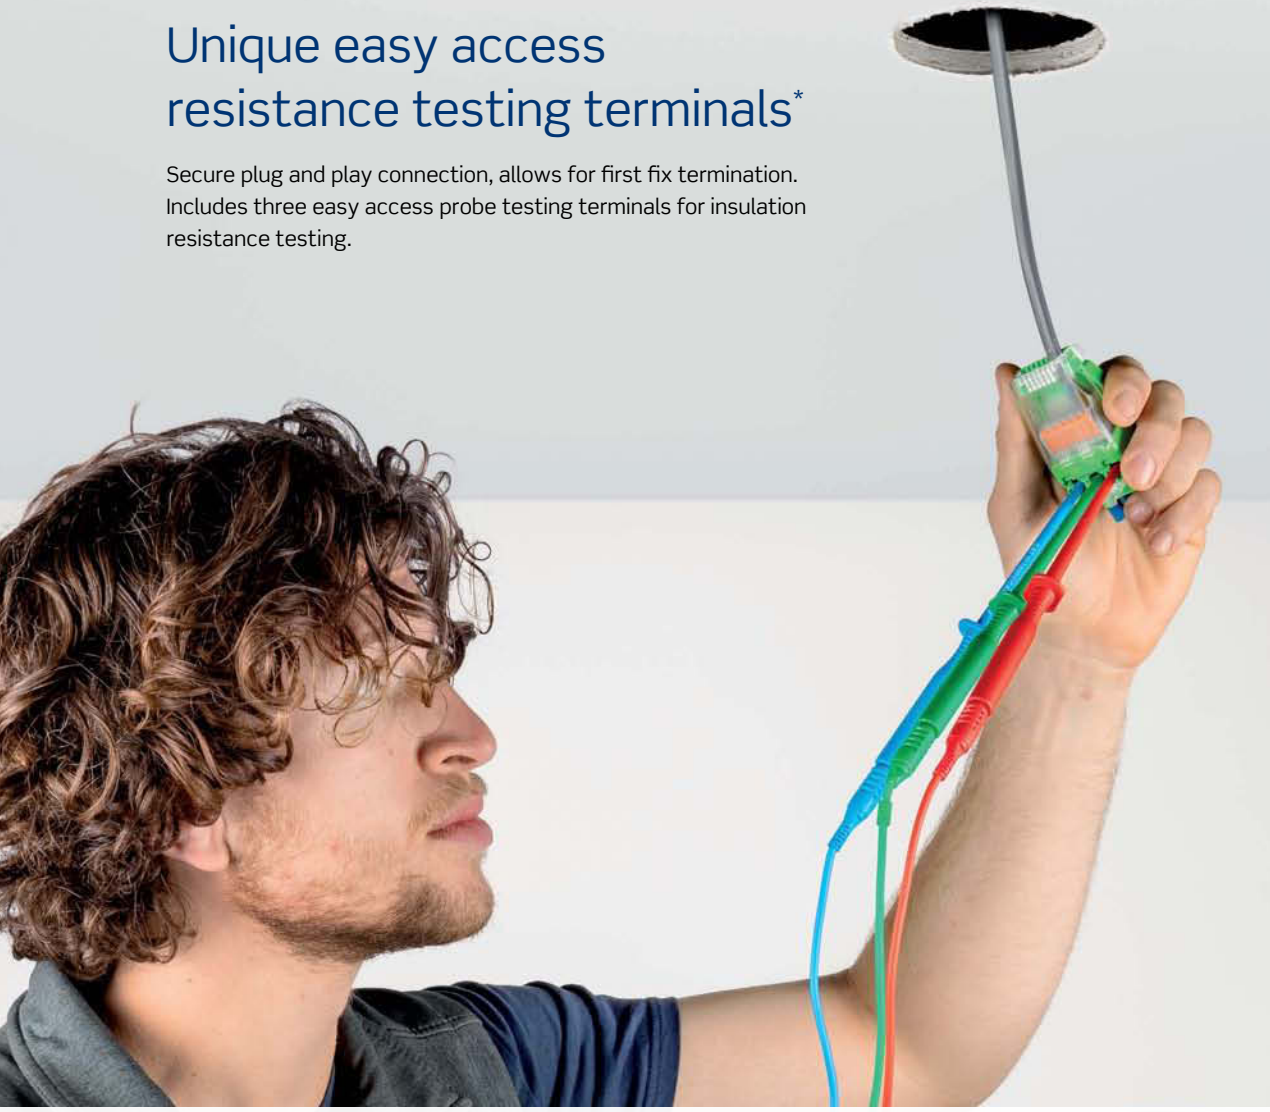



Designed to accommodate all testing probe types


The easy access testing terminals have been designed to fit commonly used probe sizes.



*UK Registered Design No. 6350021

Plug and play two-part connector*

Double hinged clear casing* allows for clearer access to terminal blocks, whilst a clear cover provides reassurance of secure termination.

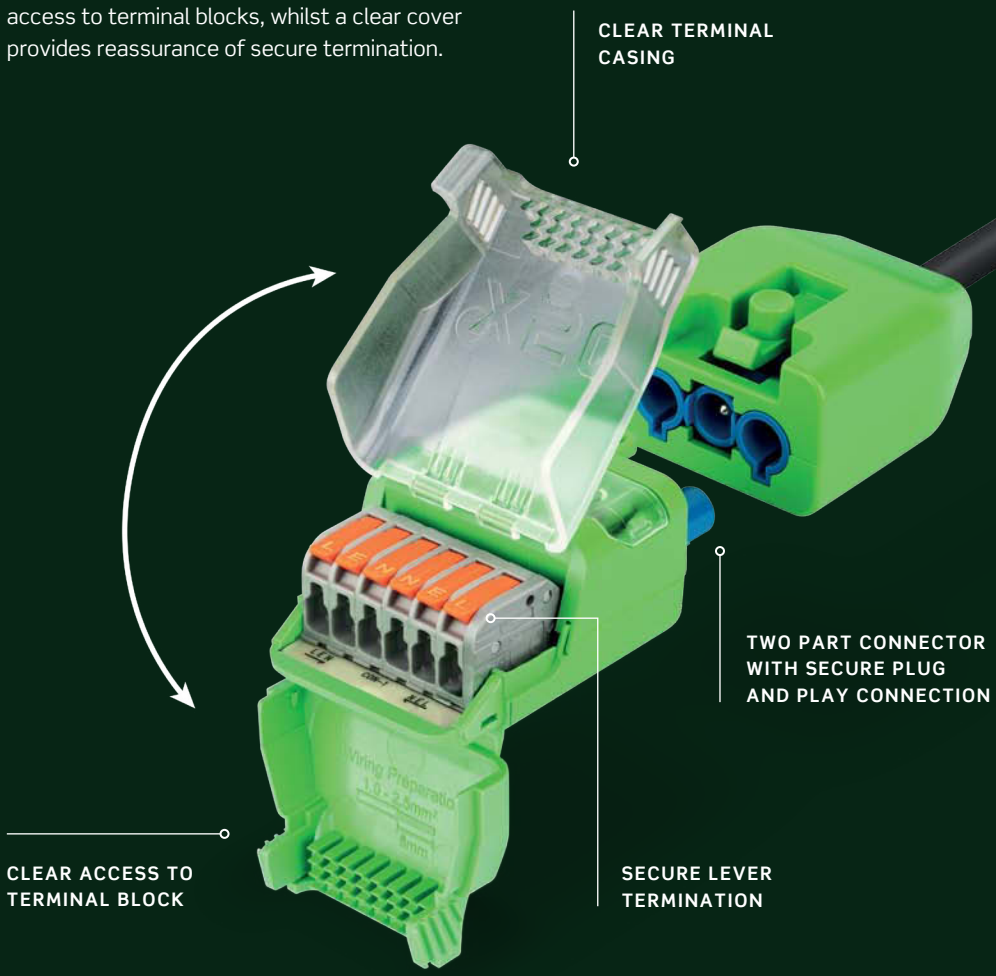




Secure lever terminal block

Ultra secure lever terminals maintain a secure connection, and have been TUV tested to EN 61984:2009 to ensure a strong hold. Accommodates solid & stranded cable.

*UK Registered Design No. 6350019

Easy glide protective clips†

The easy glide protective clips on X50® are designed to reduce ceiling damage and allow for simple ceiling access.

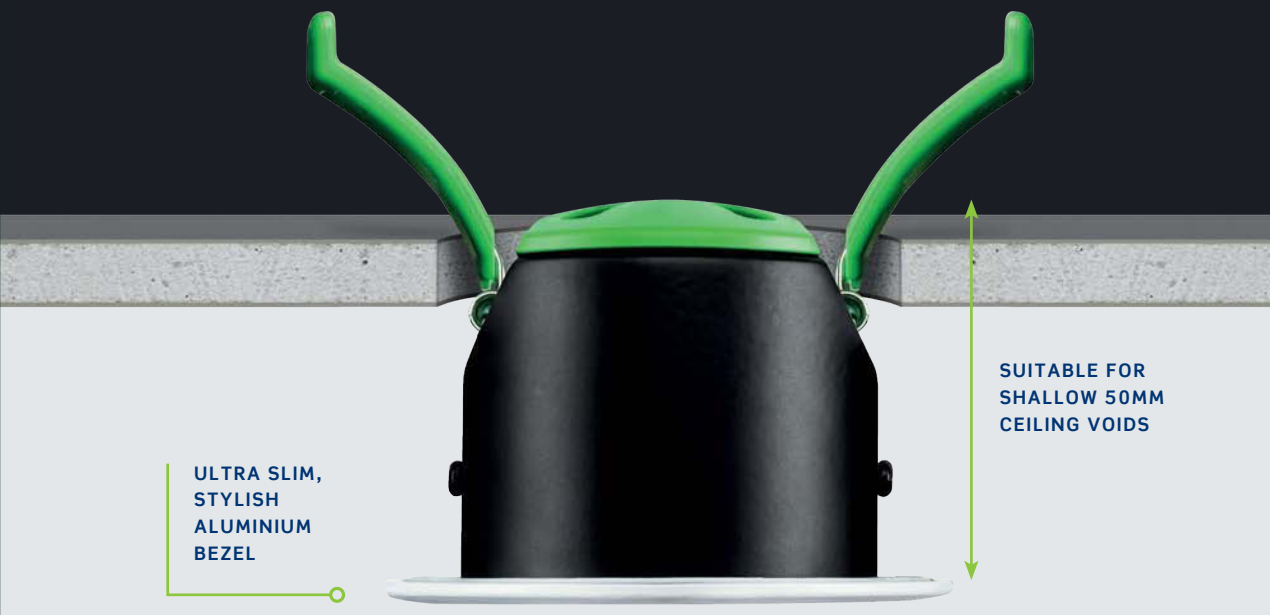









Wattage & colour selectable from below the ceiling

Adjust the Wattage and colour temperature via a simple switch. Choose between 3.5W or 5W, and 3000K/4000K/5700K colour temperatures. Up to 140 lumens per circuit Watt.

†UK Registered Design No. 6350018

X50®

- Two wattage and three colour selectable from beneath the ceiling
- Two-part first fix connector with dedicated testing terminals
- Double hinged terminal for easy access to terminal blocks
- Tested for use in Solid, I-Joist and Steel Open Web joist ceilings**
- Available in a multipack of 10 with white bezel (JC**1101/WH10**) or without bezel (JC**1101/NB**)

JC**1107/WH**†
(Bezel only)





JC**1107/BN**†
(Bezel only)



JC**1107/CH**†
(Bezel only)



JC**1107/BR**†
(Bezel only)




JC**1107/BLK**†
(Bezel only)



JC**1107/ANTH**†
(Bezel only)



JC**1101/WH10** Multipack available



Cut-out: Ø68-70mm

IP 65 **Rating** | **Class 1** | **Colour switchable** | **Wattage switchable** | 80 **CRI: Ra** | 5yr **Warranty*** | **Dimmable** | 60° **Beam**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1101/WH10**	X50 Multipack of 10 with white bezels	3000K/4000K/5700K	Yes	3W/5W	480/700	137/140
JC**1101/NB**	X50 without bezel	3000K/4000K/5700K	Yes	3W/5W	480/700	137/140
JC**1107***	Separate bezel for X50 (add suffix)	-	-	-	-	-
JC**131003/X50**	X50 Emergency Pack	-	-	-	-	-

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BR**	Brushed Brass
JC----/**ANTH**	Anthracite	JC----/**BN**	Brushed Nickel
JC----/**BLK**	Black	JC----/**CH**	Chrome

ADDITIONAL INFO

†Bezel only, to be used with JC**1101/NB** X50 body (sold separately).

Body: Steel. **Lens:** Polycarbonate. **Bezel:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

X50® **Tilt IP65**

- Two wattage and three colour selectable from remote driver
- Two-part first fix connector with dedicated testing terminals
- Double hinged terminal for easy access to terminal blocks
- Tested for use in Solid, I-Joist and Steel Open Web joist ceilings**
- 20° tiltable adjustment

JC**1102/WH**




JC**1102/CH**



JC**1102/BN**





Cut-out: Ø83mm

IP 65 **Rating** | Class 2 | **Colour switchable** | **Wattage switchable** | 80 **CRI: Ra** | 5yr **Warranty*** | **Dimmable** | 60° **Beam**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1102/BN**	X50 with brushed nickel bezel	3000K/4000K/5700K	Yes	3W/5W	480/700	137/140
JC**1102/CH**	X50 with chrome bezel	3000K/4000K/5700K	Yes	3W/5W	480/700	137/140
JC**1102/WH**	X50 with white bezel	3000K/4000K/5700K	Yes	3W/5W	480/700	137/140


Body: Steel. **Lens:** Polycarbonate. **Bezel:** Aluminium.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.




V50™

Ultra shallow, colour selectable from beneath the ceiling







Here to stay

The go-to fire-rated downlight for thousands of electricians throughout the UK.

V50™ has become a benchmark in fire-rated downlight technology, widely specified and trusted by electricians nationwide. Engineered for performance, reliability, and compliance, V50™ continues to lead the market—backed by an extended 7-year warranty for long-term assurance and peace of mind.



For fast support, register at **jcc.co.uk/warranty**, or contact **jcc.co.uk** with your proof of purchase

V50™

- Selectable colour temperature from beneath the ceiling, 3000K & 4000K
- Die-cast aluminium bezels
- Tested for use in Solid, I-Joist and Steel Open Web joist ceilings. See jcc.co.uk for latest test reports**
- Available as a complete fixture or without bezel (JC**1001/NB**)

JC**1001/WH**





JC**1001/CH**



JC**1001/BN**



JC**1006/BR**†




JC**1006/BLK**†



JC**1006/ANTH**†

IP 65 Rating | Class 2 | Colour switchable | 80 CRI: Ra | 7yr Warranty* | Dimmable | 60° Beam



Cut-out: Ø68-70mm

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1001/NB**	V50 without bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1001WHCP**	V50 Multipack of 10 with white aluminium bezels	3000K & 4000K	Yes	6W	650/700	108/116
JC**1001/BN**	V50 with brushed nickel bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1001/CH**	V50 with chrome bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1001/WH**	V50 with white bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1001/NBDALI**	V50 DALI/1-10V without bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1006***	Separate bezel for V50 (add suffix)	-	-	-	-	-
JC**EM002/50**	V50 Emergency Pack	-	-	-	-	-
JC**EM002/50ST**	V50 Emergency Pack Self-Test	-	-	-	-	-
BC**00343**	V50 Replacement Driver	-	Yes	6W	-	-

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BR**	Brushed Brass
JC----/**ANTH**	Anthracite	JC----/**BN**	Brushed Nickel
JC----/**BLK**	Black	JC----/**CH**	Chrome

ADDITIONAL INFO

†Bezel only to be used with JC**1001/NB**.
Accessories: Converter plate (p.32), Concealer ring (p.33)

Body: Steel. **Lens:** Polycarbonate. **Bezel:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

V50™ Tilt

- Colour temperature switch located on the driver, 3000K & 4000K
- Die-cast aluminium bezels
- Tested for use in Solid, I-Joist and Steel Open Web joist ceilings. See jcc.co.uk for latest test reports**
- 350° rotatable and 20° tiltable, allows adjustment adjacent to joists
- IP65 low profile design, for installations in shallow 50mm ceiling voids

JC**1002/WH**




JC**1002/CH**



JC**1002/BN**





JC1002
Cut-out: Ø85mm

JC1026
Cut-out: Ø86mm

IP 20 **Rating** | IP 65 **Rating** | **Class 2** | **Colour switchable** | **CRI: Ra** 80 | **Warranty*** 7yr | **Dimmable** | **Beam** 60°

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1002***	V50 Tilt IP20 (for bezel colour add suffix)	3000K & 4000K	Yes	6W	650/700	108/116
JC**1026***	V50 Tilt IP65 (for bezel colour add suffix)	3000K & 4000K	Yes	6W	650/700	108/116
BC**00344**	V50 Tilt Replacement Driver	-	Yes	6W	-	-

***COLOUR VARIATIONS**

JC----**/WH**	White	JC----**/BN**	Brushed Nickel
JC----**/CH**	Chrome		

ADDITIONAL INFO

Body: Steel. **Lens:** Polycarbonate. **Bezel:** Aluminium.
Accessories: Converter plate (p.32)

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

V50™
Converter Plate

- Allows for the retrofit of V50™ and V50™ Tilt units where larger downlights were previously installed
- Suitable for cut-outs 80-120mm in diameter
- Tested for use in I-Joist and Steel Open Web Joist ceilings. See jcc.co.uk for latest test reports**
- Not for use with V50™ Pro

JC**1003/WH**




JC**1003/BN**



JC**1003/CH**



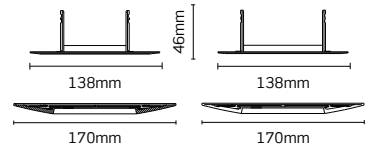

JC1003
Cut-out: Ø80-120mm

JC1004
Cut-out: Ø80-120mm

IP 20 **Rating****

IP 65 **Rating***

2yr **Guarantee**

BN **B. Nickel**

CH **Chrome**

WH **White**

CODE	DESCRIPTION
JC**1003***	Converter plate for standard V50 (luminaire not included)
JC**1004****	Converter plate for V50 Tilt (luminaire not included)

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BN**	Brushed Nickel	JC----/**CH**	Chrome

ADDITIONAL INFO

Body: Steel. **Bezel:** Aluminium.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

V50™
Concealer Ring


- Covers ceiling cut-outs damaged from previous fittings
- For use with ceiling cut-outs 80-105mm in diameter
- Does not maintain fire rating
- Not for use with V50™ Pro





Concealer ring

IP 20 **Rating** | 2yr **Guarantee** | WH **White**



Cut-out: Ø72mm

CODE	DESCRIPTION
JC**1005**	Concealer ring for standard V50 - 5 pack (luminaire not included)

Body: Steel. | (Does not maintain fire rating)

NEW
VARIANTS



V50™ Pro Retrofit

For retrofit applications with larger cut-outs

FOR CEILING CUT-OUTS BETWEEN Ø70-159MM



COLOUR SELECTABLE BENEATH THE CEILING



SIX INTERCHANGEABLE BEZEL OPTIONS




V50™ Pro **100mm**

Maintains the fire rating of larger ceiling cut-outs from 70mm-92mm.




V50™ Pro **135mm**

For larger ceiling cut-outs from 70-127mm that would traditionally require a converter plate.

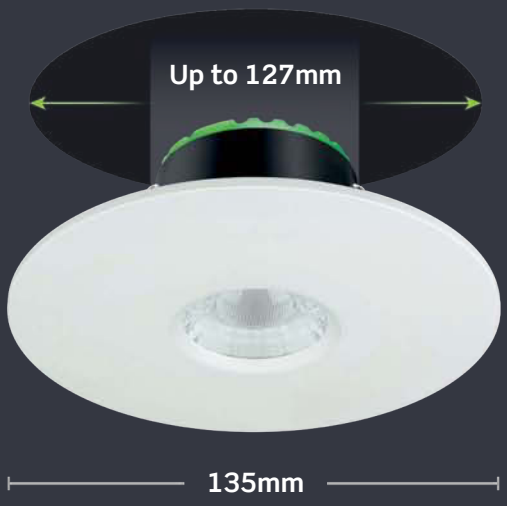

V50™ Pro **170mm**

For oversized ceiling cut-outs from 70-159mm. Ideal for concealing very large cut-outs.

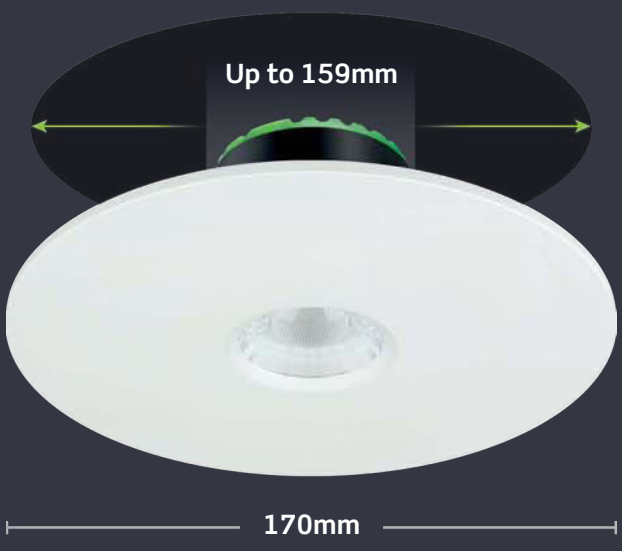

V50™ Pro 100mm
Cut-outs from 70-92mm


NEW VARIANTS

- Slim profile 3mm bezel (six interchangeable bezel options)
- Allows for retrofit where larger downlights were previously installed
- Covers ceiling cut-outs 70-92mm damaged from previous fittings
- Low profile design, for installations in shallow 50mm ceiling voids
- Selectable colour temperature from beneath the ceiling, 3000K & 4000K
- Tested for use in Solid and I-Joist ceilings. See jcc.co.uk for latest test reports**



White | Chrome | B. Nickel | Anthracite | Black | B. Brass

IP65 Rating | Class 2 | Colour switchable | 80 CRI: Ra | 7yr Warranty* | Dimmable | 60° Beam



Cut-out: Ø70-92mm

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1013/NB**	V50 Pro Retrofit 100mm without bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1013***	V50 Pro Retrofit 100mm (for bezel colour add suffix)	3000K & 4000K	Yes	6W	650/700	108/116
JC**1013/NBDALI**	V50 Pro Retrofit 100mm DALI without bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC1033†	Separate bezel for V50 Pro Retrofit 100mm (add suffix)	-	-	-	-	-
JC**EM002/50**	V50 Emergency Pack	-	-	-	-	-
JC**EM002/50ST**	V50 Emergency Pack Self-Test	-	-	-	-	-
BC**00343**	V50 Replacement Driver	-	Yes	6W	-	-

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BR**	Brushed Brass
JC----/**ANTH**	Anthracite	JC----/**BN**	Brushed Nickel
JC----/**BLK**	Black	JC----/**CH**	Chrome

ADDITIONAL INFO

†Bezel only, to be used with JC**1013/NB** V50 Pro Retrofit 100mm body (sold separately).

Body: Steel. **Lens:** Polycarbonate. **Bezel:** Aluminium.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Easier access to cables within the ceiling void

V50™ Pro Retrofit 100mm allows contractors to use larger cut-outs and easily reach up and into a ceiling void without damaging their hands on smaller cut-outs.





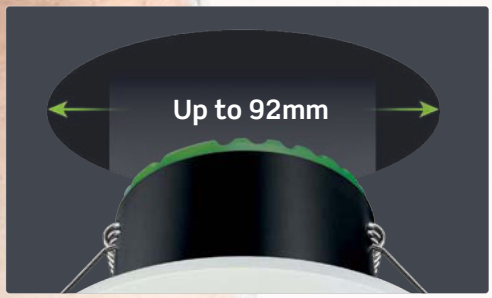

Covers damage left by previous downlights

Allows damaged cut-outs caused by previous downlights to be covered without the need to be re-plastered and also maintain the fire rating.

Allows retrofit into larger previous cut-outs

If a downlight with a larger cut-out was previously installed, the V50™ 100mm can be installed to cover a hole up to 92mm in diameter.

V50™ Pro 135mm

Cut-outs from 70-127mm


NEW VARIANTS

- Slim profile 3mm bezel (six interchangeable bezel options)
- Allows for retrofit where larger downlights were previously installed
- Covers ceiling cut-outs 70-127mm damaged from previous fittings
- Low profile design, for installations in shallow 50mm ceiling voids
- Selectable colour temperature from beneath the ceiling, 3000K & 4000K
- Tested for use in Solid and I-Joist ceilings. See jcc.co.uk for latest test reports**



White | Chrome | B. Nickel | Anthracite | Black | B. Brass

IP65 Rating | Class 2 | Colour switchable | 80 CRI: Ra | 7yr Warranty* | Dimmable | 60° Beam



Cut-out: Ø70-127mm

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1015/NB**	V50 Pro Retrofit 135mm without bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1015***	V50 Pro Retrofit 135mm (for bezel colour add suffix)	3000K & 4000K	Yes	6W	650/700	108/116
JC**1015/NBDALI**	V50 Pro Retrofit 135mm DALI without bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC1035†	Separate bezel for V50 Pro Retrofit 135mm (add suffix)	-	-	-	-	-
JC**EM002/50**	V50 Emergency Pack	-	-	-	-	-
JC**EM002/50ST**	V50 Emergency Pack Self-Test	-	-	-	-	-
BC**00343**	V50 Replacement Driver	-	Yes	6W	-	-

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BR**	Brushed Brass
JC----/**ANTH**	Anthracite	JC----/**BN**	Brushed Nickel
JC----/**BLK**	Black	JC----/**CH**	Chrome

ADDITIONAL INFO

†Bezel only, to be used with JC**1015/NB** V50 Pro Retrofit 135mm body (sold separately).

Body: Steel. **Lens:** Polycarbonate. **Bezel:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Cover small chips & dents without redecorating

V50™ Pro Retrofit 135mm is designed for cut-outs where larger downlights were previously installed, as well as smaller cut-outs which have suffered damage caused by previous fittings.



V50™ Pro 170mm

Cut-outs from 70-159mm


NEW VARIANTS

- Slim profile 3mm bezel (six interchangeable bezel options)
- Allows for retrofit where larger downlights were previously installed
- Covers ceiling cut-outs 70-159mm damaged from previous fittings
- Low profile design, for installations in shallow 50mm ceiling voids
- Selectable colour temperature from beneath the ceiling, 3000K & 4000K
- Tested for use in Solid and I-Joist ceilings. See jcc.co.uk for latest test reports**



White | Chrome | B. Nickel | Anthracite | Black | B. Brass

IP65 Rating | Class 2 | Colour switchable | 80 CRI: Ra | 7yr Warranty* | Dimmable | 60° Beam



Cut-out: Ø70-159mm

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1017/NB**	V50 Pro Retrofit 170mm without bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1017***	V50 Pro Retrofit 170mm (for bezel colour add suffix)	3000K & 4000K	Yes	6W	650/700	108/116
JC**1017/NBDALI**	V50 Pro Retrofit 170mm DALI without bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC1037†	Separate bezel for V50 Pro Retrofit 170mm (add suffix)	-	-	-	-	-
JC**EM002/50**	V50 Emergency Pack	-	-	-	-	-
JC**EM002/50ST**	V50 Emergency Pack Self-Test	-	-	-	-	-
BC**00343**	V50 Replacement Driver	-	Yes	6W	-	-

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BR**	Brushed Brass
JC----/**ANTH**	Anthracite	JC----/**BN**	Brushed Nickel
JC----/**BLK**	Black	JC----/**CH**	Chrome

ADDITIONAL INFO

†Bezel only, to be used with JC**1017/NB** V50 Pro Retrofit 170mm body (sold separately).

Body: Steel. **Lens:** Polycarbonate. **Bezel:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Oversized cut-outs made simple

The single piece bezel design on V50™ Pro Retrofit 170mm allows for a quick and easy installation, replacing the need for traditional converter plates with multiple complex parts.



TRADITIONAL CONVERTER PLATE

V50™ PRO RETROFIT 170MM

Strengthened spring clips secure the fitting into the ceiling


V50™ Pro Retrofit 170mm features strengthened spring clips, and can be secured into the ceiling using two clips in contrast to traditional converter plates which use more complicated clip designs.



V50™ Pro Plaster-In

Plaster-in versions of our market leading fire-rated downlight range

UNIQUE AC CABLE HOLDER HOLDS CABLES IN PLACE

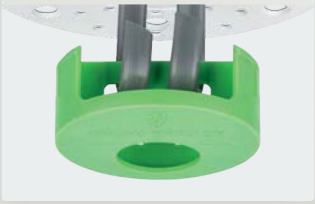

COUNTERSUNK SCREW POINTS



SHALLOW BAFFLE LIP, LESS PLASTER REQUIRED




Countersunk screw points

The countersunk screw points have been designed for ultra secure mounting and a seamless finish when plastered over.



Shallow baffle lip

The shallow baffle lip has been designed to significantly reduce the required thickness of plaster for the installation.

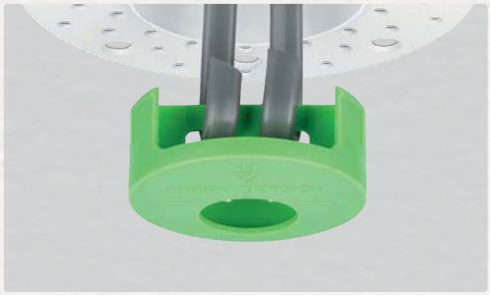


Unique AC cable holder

The internal cable holder is provided to ensure cables are held in place during first fix wiring and are ready for second fix.

Easy slot modular system

The V50™ LED module has been customised to fit into the plaster-in frame. Once terminated, simply insert the light module, align the recess and twist. Reverse to remove. Select between 3000K & 4000K colour temperature on the remote driver (JC**1020WH** only).

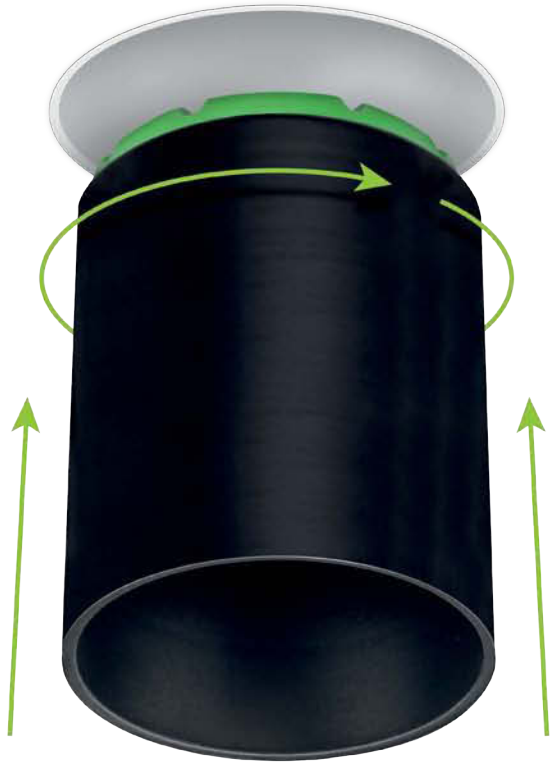

Step 1




Insert & fix plate into plasterboard.

Step 2




First fix wiring, assisted by AC cable holder.

Step 3



Plaster over the fixed plate to the baffle lip.

Step 4



Wire then insert the lamp holder module.

V50™ Pro
Plaster-In White

- Countersunk screw points for ultra secure mounting
- Unique AC cable holder
- Shallow baffle lip designed to reduce the required thickness of plaster
- Double hinged driver with clear casing
- Selectable colour temperature from remote driver, 3000K & 4000K
- Tested for use in Solid and I-Joist ceilings. See jcc.co.uk for latest test reports**

JC**1020WH**






Post-plaster finish



Full product



Cut-out: Ø68-70mm

IP 65 **Rating** | **Class 2** | **Colour switchable** | 80 **CRI: Ra** | 7yr **Warranty*** | **Dimmable** | 50° **Beam**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1020WH**	V50 Pro Plaster-In White	3000K/4000K	Yes	6.2W	668/749	107/120

Body: Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

V50™ Pro
Plaster-In Black

- Countersunk screw points for ultra secure mounting
- Unique AC cable holder
- Shallow baffle lip designed to reduce the required thickness of plaster
- Double hinged driver with clear casing
- Tested for use in Solid and I-Joist ceilings. See jcc.co.uk for latest test reports**

JC**1020/3KBLK** & JC**1020/4KBLK**






Post-plaster finish



Full product



Cut-out: Ø68-70mm

IP 65 Rating | Class 2 | 80 CRI: Ra | 7yr Warranty* | Dimmable | 50° Beam

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1020/3KBLK**	V50 Pro Plaster-In Black	3000K	Yes	5.8W	515	89
JC**1020/4KBLK**	V50 Pro Plaster-In Black	4000K	Yes	5.8W	555	95

Body: Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

V50™ Pro Anti-Glare

Discreet recessed light source with all the features of V50™ Pro

COLOUR SWITCHABLE BENEATH THE CEILING



60° BEAM ANGLE FOR STANDARD SPACING



SLIM PROFILE 3MM ALUMINIUM BEZEL







Minimise glare, maximise comfort

The 20mm recessed lens on V50™ Pro Anti-Glare reduces glare, meaning you can enjoy lighting in your home without the unpleasant glare caused by traditional downlights. It delivers the same light output and 60° beam angle as V50™, allowing fittings to be spaced as standard, non-recessed downlights.

V50™ Pro
Anti-Glare

- 20mm recessed lens for reduced glare
- V50™ Pro driver with double hinge terminal cover for ease of installation
- White, Black and White/Black bezel options
- Low profile design, for installations in shallow 50mm ceiling voids
- Selectable colour temperature from beneath the ceiling, 3000K & 4000K
- Tested for use in Solid and I-Joist ceilings. See jcc.co.uk for latest test reports**

JC**1019/WHBLK**




JC**1019/WH**



JC**1019/BLK**





Cut-out: Ø70-76mm

IP 65 Rating | Class 2 | Colour switchable | 80 CRI: Ra | 7yr Warranty* | Dimmable | 60° Beam | BLK Black | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**1019/WH**	V50 Pro Anti-Glare with white bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1019/WHDALI**	V50 Pro Anti-Glare with white bezel DALI	3000K & 4000K	Yes	6W	650/700	108/116
JC**1019/WHBLK**	V50 Pro Anti-Glare with white bezel with inner black cone	3000K & 4000K	Yes	6W	650/700	108/116
JC**1019/WHBLKDALI**	V50 Pro Anti-Glare with white bezel with inner black cone DALI	3000K & 4000K	Yes	6W	650/700	108/116
JC**1019/BLK**	V50 Pro Anti-Glare with black bezel	3000K & 4000K	Yes	6W	650/700	108/116
JC**1019/BLKDALI**	V50 Pro Anti-Glare with black bezel DALI	3000K & 4000K	Yes	6W	650/700	108/116
BC**00343**	V50 Replacement Driver	-	Yes	6W	-	-


Body: Steel. **Lens:** Polycarbonate. **Bezel:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

I regularly visit the product team at JCC to review their new products. I'm starting to feel as if I am one of the product team!

SEAN WILLIAMSON

SL Electrical

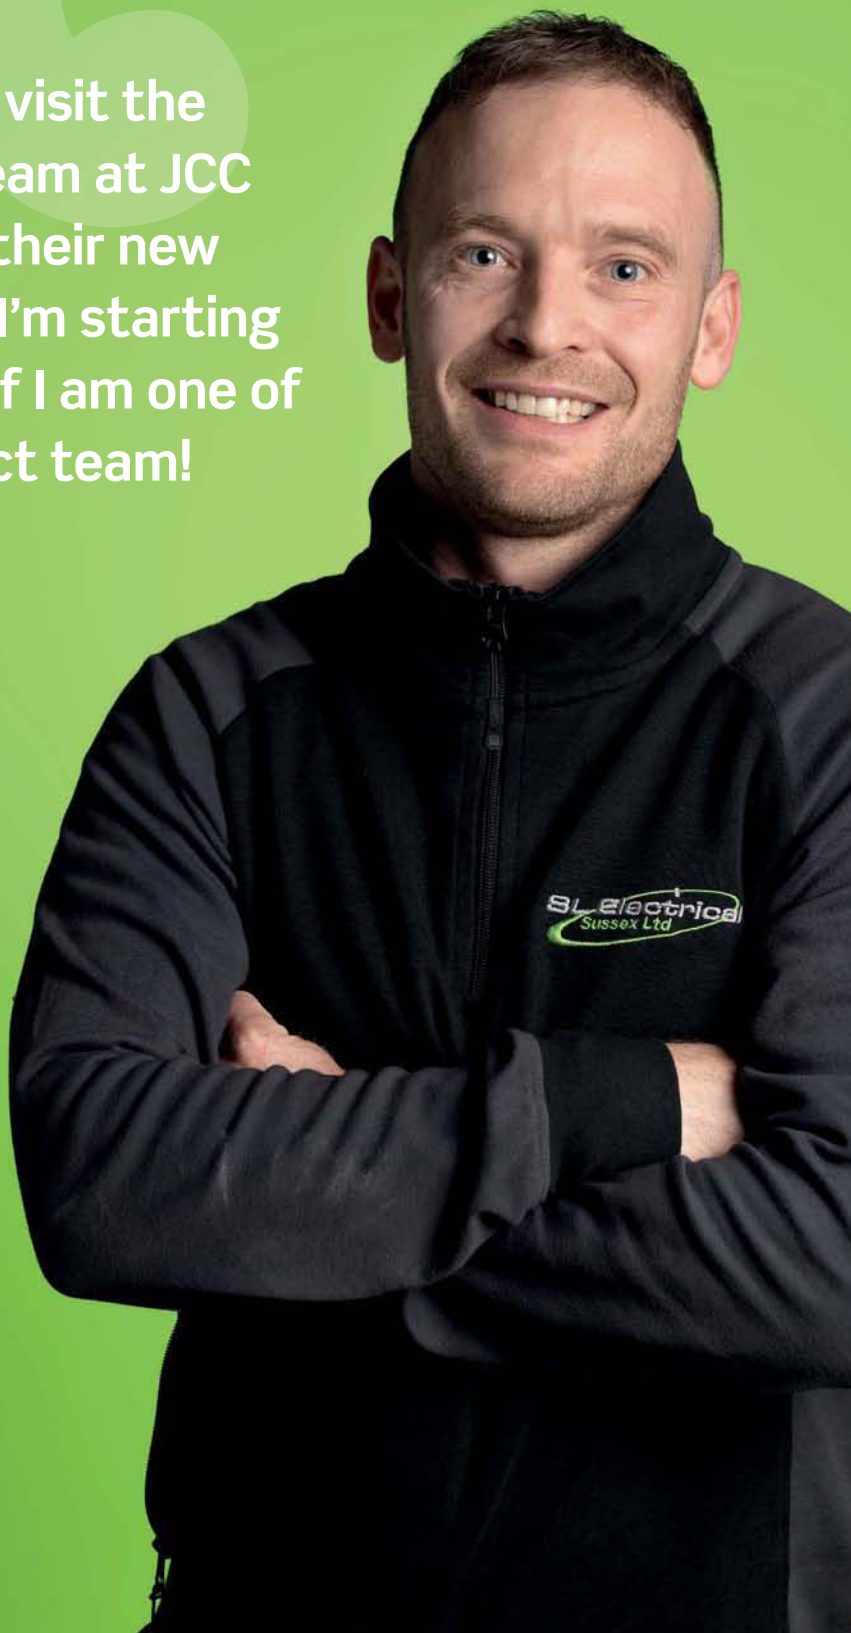

Scan QR for electrician video

NEW
VARIANTS



Fireguard®
Next Generation

The next generation of fire-rated LED downlights

TAPERED CAN FOR EASY CEILING ACCESS



STANDARD AND XL CAN AND BEZEL OPTIONS




INTERCHANGEABLE ALUMINIUM BEZELS



Tapered can design for easy ceiling access

The narrow, tapered top of the can ensures quick and easy access into the ceiling void.



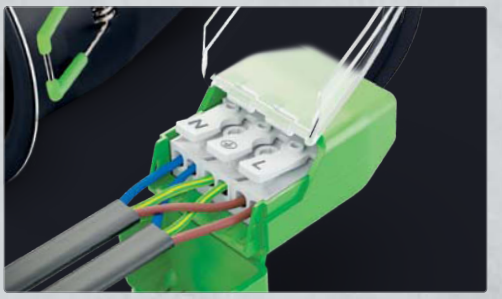

Clear access hinged terminal

Double hinged terminal with clear cover for easy access to press fit terminals.



Leading fire safety & certification

Tested for use in Solid, I-Joist and Open Web joist ceilings, adheres to building regs Part B, C and E.

JC**010010/NB**

Standard Can

FOR Ø74MM CUT-OUTS



Compatible with the following bezels:



Standard Bezel

JC010013 - IP20
JC010019 - IP65





Anti-Glare Bezel

JC010027 - IP20
JC010028 - IP65





Concealer Bezel

JC010029 - IP20
JC010030 - IP65



JC**010023/NB**

XL Can

FOR Ø85MM CUT-OUTS



Compatible with the following bezels:



Tilt Bezel

JC010026 - IP20





Anti-Glare XL Bezel

JC010031 - IP20
JC010032 - IP65





Concealer XL Bezel

JC010033 - IP20
JC010034 - IP65



Fireguard® Next Generation
IP20

NEW VARIANTS

- Slim profile 3mm die-cast aluminium bezel
- Ultra fast press fit loop-in/loop-out terminal
- Harmonised IP20/65 design ensures continuity throughout applications
- Tested for use in Solid, I-Joist and steel open web joist ceilings. See jcc.co.uk for latest test reports**
- Concealer bezel available, see p.66

JC**010010/WH**





JC**010010/CH**



JC**010010/BN**



JC**10013/BR†**



JC**10013/CO†**



JC**010013/BL†**



Rating




Class 1




Guarantee



Lamp not supplied



JC010010/NB
Cut-out: Ø74mm



JC010010 (with bezel)
Cut-out: Ø74mm



JC010013

CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**010010/NB**	Fireguard Next Generation without bezel	GU10 7W LED Max
JC**010010/BN**	Fireguard Next Generation with brushed nickel bezel	GU10 7W LED Max
JC**010010/CH**	Fireguard Next Generation with chrome bezel	GU10 7W LED Max
JC**010010/WH**	Fireguard Next Generation with white bezel	GU10 7W LED Max
JC**010013***	Separate bezel for Fireguard Next Generation (add suffix)	-

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BR**	Brushed Brass
JC----/**BL**	Black	JC----/**BN**	Brushed Nickel
JC----/**CH**	Chrome	JC----/**CO**	Copper

ADDITIONAL INFO

†Sold as bezel only, not as a complete fitting.
Accessories: Concealer bezel (p.66)

Body: Steel. **Bezel:** Aluminium.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Fireguard® Next Generation
IP65

NEW VARIANTS

- Slim profile 3mm die-cast aluminium bezel
- Ultra fast press fit loop-in/loop-out terminal
- Harmonised IP20/65 design ensures continuity throughout applications
- Tested for use in Solid, I-Joist and steel open web joist ceilings. See jcc.co.uk for latest test reports**
- Concealer bezel available, see p.66

JC**010016/WH**





JC**010016/CH**



JC**010016/BN**




JC**010019/BR**†




JC**010019/CO**†



JC**010019/BL**†



JC010010/NB
Cut-out: Ø74mm



JC010010 (with bezel)
Cut-out: Ø74mm



JC010019

IP 65 **Rating**

Class 1

2yr **Guarantee**

Lamp not supplied

CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**010010/NB**	Fireguard Next Generation without bezel	GU10 7W LED Max
JC**010016/BN**	Fireguard Next Generation IP65 Showerlight with brushed nickel bezel	GU10 7W LED Max
JC**010016/CH**	Fireguard Next Generation IP65 Showerlight with chrome bezel	GU10 7W LED Max
JC**010016/WH**	Fireguard Next Generation IP65 Showerlight with white bezel	GU10 7W LED Max
JC**010019***	Separate IP65 bezel for Fireguard Next Generation (add suffix)	-

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BR**	Brushed Brass
JC----/**BL**	Black	JC----/**BN**	Brushed Nickel
JC----/**CH**	Chrome	JC----/**CO**	Copper

ADDITIONAL INFO

†Sold as bezel only, not as a complete fitting.
Accessories: Concealer bezel (p.66)

Body: Steel. **Bezel:** Aluminium.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Fireguard® Next Generation
Tilt XL IP20

NEW VARIANTS

- 15° tiltable
- Slim profile 3mm die-cast aluminium bezel
- Ultra fast press fit loop-in/loop-out terminal
- Tested for use in Solid, I-Joist and steel open web joist ceilings. See jcc.co.uk for latest test reports**

JC**010023/WH**





JC**010023/CH**



JC**010023/BN**




JC**010026/BR†**




JC**010026/CO†**



JC**010026/BL†**



JC010023/NB
Cut-out: Ø85mm



JC010023 (with bezel)
Cut-out: Ø85mm



JC010026

IP 20 **Rating** | **Class 1** | 2yr **Guarantee** | **Lamp not supplied**

CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**010023/NB**	Fireguard Next Generation Tilt XL Can (without bezel)	GU10 7W LED Max
JC**010023/BN**	Fireguard Next Generation Tilt XL Can with brushed nickel bezel	GU10 7W LED Max
JC**010023/CH**	Fireguard Next Generation Tilt XL Can with chrome bezel	GU10 7W LED Max
JC**010023/WH**	Fireguard Next Generation Tilt XL Can with white bezel	GU10 7W LED Max
JC**010026***	Separate Tiltable bezel for Fireguard Next Generation Tilt (add suffix)	-

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BR**	Brushed Brass
JC----/**BL**	Black	JC----/**BN**	Brushed Nickel
JC----/**CH**	Chrome	JC----/**CO**	Copper

ADDITIONAL INFO

†Sold as bezel only, not as a complete fitting.
Accessories: Concealer bezel (p.67)

Body: Steel. **Bezel:** Aluminium.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.



Fireguard® Next Generation Anti-Glare

Recessed lightsource with black or white bezel











Minimise glare, maximise comfort

The 20mm recess on Fireguard® Next Generation Anti-Glare reduces glare, meaning you can enjoy lighting in your home without the unpleasant glare caused by traditional downlights.

Fireguard® Next Generation
Anti-Glare

- 20mm recessed lamp position for reduced glare (lamp not supplied)
- Slim profile die-cast aluminium bezel
- For use with standard Fireguard® Next Generation can (Cut-outs 74mm)
- Ultra fast press fit loop-in/loop-out terminal
- Tested for use in Solid, I-Joist and steel open web joist ceilings. See jcc.co.uk for latest test reports**
- White or black matte baffle options

JC**010027/WH**




JC**010027/BLK**





JC**010010/NB**

IP 20 **Rating** | IP 65 **Rating** | 2yr **Guarantee** | **Lamp not supplied** | BLK **Black** | WH **White**



CODE	DESCRIPTION
JC**010010/NB**	Fireguard Next Generation without bezel
JC**010027/BLK**	Fireguard Next Generation Anti-Glare Bezel IP20 Black
JC**010027/WH**	Fireguard Next Generation Anti-Glare Bezel IP20 White
JC**010028/BLK**	Fireguard Next Generation Anti-Glare Bezel IP65 Black
JC**010028/WH**	Fireguard Next Generation Anti-Glare Bezel IP65 White

Bezels only to be used with JC**010010/NB**.
Body: Steel. **Bezel:** Aluminium.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Fireguard® Next Generation
Anti-Glare XL

- 20mm recessed lamp position for reduced glare (lamp not supplied)
- Slim profile die-cast aluminium bezel
- For use with standard Fireguard® Next Generation can (Cut-outs 85mm)
- Ultra fast press fit loop-in/loop-out terminal
- Tested for use in Solid, I-Joist and steel open web joist ceilings. See jcc.co.uk for latest test reports**
- White or black matte baffle options

JC**010031/WH**




JC**010031/BLK**





JC**010023/NB**



IP 20 **Rating** | IP 65 **Rating** | 2yr **Guarantee** | **Lamp not supplied** | BLK **Black** | WH **White**

CODE	DESCRIPTION
JC**010023/NB**	Fireguard Next Generation XL Can (without bezel)
JC**010031/BLK**	Fireguard Next Generation Anti-Glare XL Bezel IP20 Black
JC**010031/WH**	Fireguard Next Generation Anti-Glare XL Bezel IP20 White
JC**010032/BLK**	Fireguard Next Generation Anti-Glare XL Bezel IP65 Black
JC**010032/WH**	Fireguard Next Generation Anti-Glare XL Bezel IP65 White

Bezels only to be used with JC**010023/NB**.
Body: Steel. **Bezel:** Aluminium.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.



Fireguard® Next Generation Concealer

Conceal damaged ceiling cut-outs with 100mm bezel

FOR CEILING CUT-OUTS BETWEEN Ø74-85MM



SLIM PROFILE DIE-CAST ALUMINIUM BEZEL



MAINTAINS FIRE RATING*



*See jcc.co.uk for latest fire test reports.

Fireguard®
Next Generation
Concealer

Covers retrofit damage to the plasterboard around a standard cut-out from a previous downlight.





Fireguard®
Next Generation
XL Can

Convert any larger cut-out of 85mm into a standard downlight or IP65.

Fireguard® Next Generation
Concealer

- Conceals plasterboard damaged by previous downlights
- Designed for use with standard Fireguard® Next Generation Can (Cut-outs 74mm)
- Matching IP20 and IP65 bezel design (lamp not supplied)
- Maintains fire rating. See jcc.co.uk for latest fire test reports**

JC**010029/WH**



JC**010029/CH**



JC**010029/BN**



JC**010029/BLK**



IP 20 **Rating**

IP 65 **Rating**

2yr **Guarantee**


Lamp not supplied

BLK **Black**

BN **B. Nickel**

CH **Chrome**

WH **White**



CODE	DESCRIPTION
JC**010010/NB**	Fireguard Next Generation Can (without bezel)
JC**010029***	Fireguard Next Generation Concealer Bezel IP20 (for bezel colour add suffix)
JC**010030***	Fireguard Next Generation Concealer Bezel IP65 (for bezel colour add suffix)

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BN**	Brushed Nickel
JC----/**BLK**	Black	JC----/**CH**	Chrome

ADDITIONAL INFO

Bezels only to be used with JC**010010/NB**.
Body: Steel. **Bezel:** Aluminium.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Fireguard® Next Generation
XL Can

- Conceals plasterboard damaged by previous downlights
- Designed for use with XL Fireguard® Next Generation Can (Cut-outs 85mm)
- Matching IP20 and IP65 bezel design (lamp not supplied)
- Maintains fire rating. See jcc.co.uk for latest fire test reports**

JC**010033/WH**



JC**010033/CH**




JC**010033/BN**



JC**010033/BLK**



IP 20 **Rating** | IP 65 **Rating** | 2yr **Guarantee** | **Lamp not supplied** | BLK **Black** | BN **B. Nickel** | CH **Chrome** | WH **White**



CODE	DESCRIPTION
JC**010023/NB**	Fireguard Next Generation XL Can (without bezel)
JC**010033***	Fireguard Next Generation XL Bezel IP20 (for bezel colour add suffix)
JC**010034***	Fireguard Next Generation XL Bezel IP65 (for bezel colour add suffix)

***COLOUR VARIATIONS**

JC----/**WH**	White	JC----/**BN**	Brushed Nickel
JC----/**BLK**	Black	JC----/**CH**	Chrome

ADDITIONAL INFO

Bezels only to be used with JC**010010/NB**.
Body: Steel. **Bezel:** Aluminium.


**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.



Fireguard® GU10 Plaster-In

Plaster-in versions of our market leading GU10 fire-rated downlight range

UNIQUE AC CABLE HOLDER HOLDS CABLES IN PLACE



COUNTERSUNK SCREW POINTS



SHALLOW BAFFLE LIP, LESS PLASTER REQUIRED



*Lamp not included.


Countersunk screw points

The countersunk screw points have been designed for ultra secure mounting and a seamless finish when plastered over.



Shallow baffle lip

The shallow baffle lip has been designed to significantly reduce the required thickness of plaster for the installation.

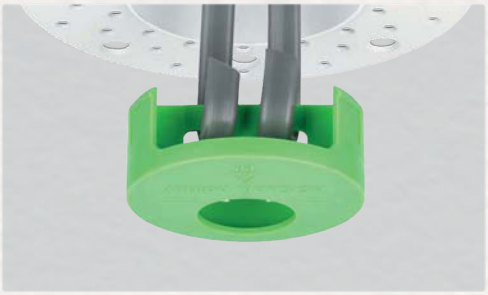


Unique AC cable holder

The internal cable holder is provided to ensure cables are held in place during first fix wiring and are ready for second fix.

Easy slot modular system

The Fireguard® lamp holder module has been customised to fit into the plaster-in frame. Once terminated, simply insert the light module, align the recess and twist. Reverse to remove.

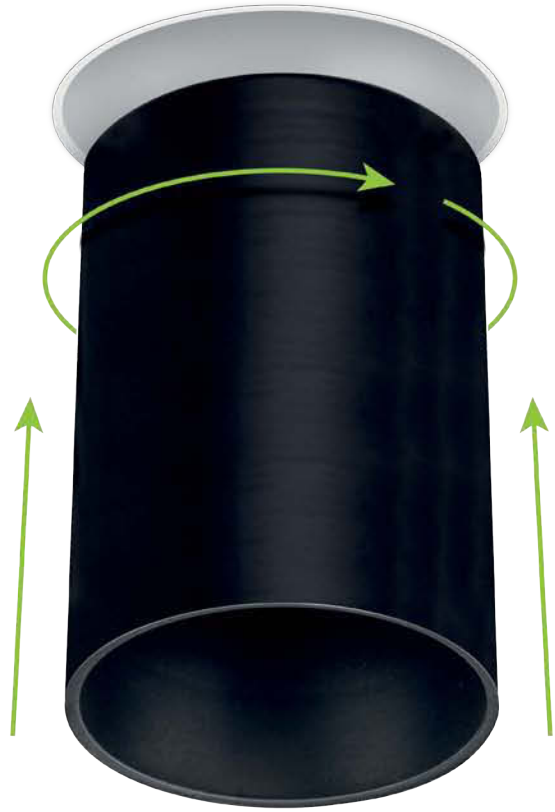

Step 1




Insert & fix plate into plasterboard.

Step 2



First fix wiring, assisted by AC cable holder.

Step 3



Plaster over the fixed plate to the baffle lip.

Step 4



Wire then insert the lamp holder module.

Fireguard® GU10
Plaster-In White

- Countersunk screw points for ultra secure mounting
- Unique AC cable holder
- Shallow baffle lip designed to reduce the required thickness of plaster
- Double hinged terminal block holder
- For use with GU10 LED lamps (lamp not supplied)
- Non-plaster-in versions available, see p.52
- Tested for use in Solid and I-Joist ceilings. See jcc.co.uk for latest test reports**

JC**010036WH**






Post-plaster finish



Full product



Cut-out: Ø68-70mm

IP 65 **Rating** | **Class 1** | 2yr **Guarantee** | **Lamp not supplied**

CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**010036WH**	Fireguard GU10 Plaster-In White	GU10 7W LED Max

Body: Steel.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Fireguard® GU10
Plaster-In Black

- Countersunk screw points for ultra secure mounting
- Unique AC cable holder
- Shallow baffle lip designed to reduce the required thickness of plaster
- Double hinged terminal block holder
- For use with GU10 LED lamps (lamp not supplied)
- Non-plaster-in versions available, see p.52
- Tested for use in Solid and I-Joist ceilings. See jcc.co.uk for latest test reports**

JC**010036BLK**






Post-plaster finish



Full product



Cut-out: Ø68-70mm

IP 65 **Rating** | **Class 1** | 2yr **Guarantee** | **Lamp not supplied**

CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**010036BLK**	Fireguard GU10 Plaster-In Black	GU10 7W LED Max

Body: Steel.

**It is the responsibility of the installer to ensure compliance with all relevant regulations. See jcc.co.uk for full details.

Downlights

Parluma	78
Rakula	86
Skydisc™ CCT	92
Skydisc™ Adjustable Wall/Ceiling light	100
Nebula™ High Output	106
Nebula™ High Output Tilt	109
Coral LED™ Plus	112
Commercial Downlight	118
Starscoop™ Linear	119
Starscoop™	120
Surface Downlight Round GU10	122
Surface Downlight Round Tilt GU10	124
Surface Downlight Square Tilt GU10	125
Surface Downlight	126



Ceiling cut out guide

Identify required ceiling cut-out sizes by downlight

Refer to the product specifications to confirm the exact ceiling cut-out dimensions that are required for installation

68–76mm



68–75mm



Nebula™
8W

68–75mm



Nebula™ Tilt
8W

68–76mm



Parluma
4W/6W

65-205mm



Skydisc™
Adjustable

90–110mm



90–95mm



Nebula™
10W & 13W

90–95mm



Nebula™ Tilt
10W & 13W

90–98mm



Parluma
6W/9W

90–102mm



Rakula
7W/10W

100–110mm



Skydisc™
4W/6W

65-205mm



Skydisc™
Adjustable

120–160mm



120–130mm



Parluma
9W/12W

120–130mm



Commercial
Downlight
18W & 25W

145–155mm



Rakula
14W/20W

150–160mm



Skydisc™
6W/9W &
8W/12W

65-205mm



Skydisc™
Adjustable

160–180mm



160–170mm



Commercial
Downlight 35W

165–180mm



Rakula
20W/28W

65-205mm



Skydisc™
Adjustable

180–210mm



195-210mm




Rakula
24W/35W

200–210mm



Skydisc™
11W/16W &
12W/17W

200–210mm



Coral LED™ Plus
13W, 18W &
25W

65-205mm



Skydisc™
Adjustable

210–255mm



220–230mm



Skydisc™
14W/20W

240–255mm



Rakula
35W/50W

65-205mm



Skydisc™
Adjustable


NEW



Parluma

Colour and wattage selectable commercial downlights available in eight colour options

COLOUR SELECTABLE, 3000K/4000K/5700K



HINGED DRIVER WITH CLEAR TERMINAL COVER




CHOOSE FROM EIGHT COLOUR OPTIONS



Hinged driver with clear terminal cover

The double hinged feature allows for easier access to terminals, whilst a clear cover provides reassurance of secure termination.

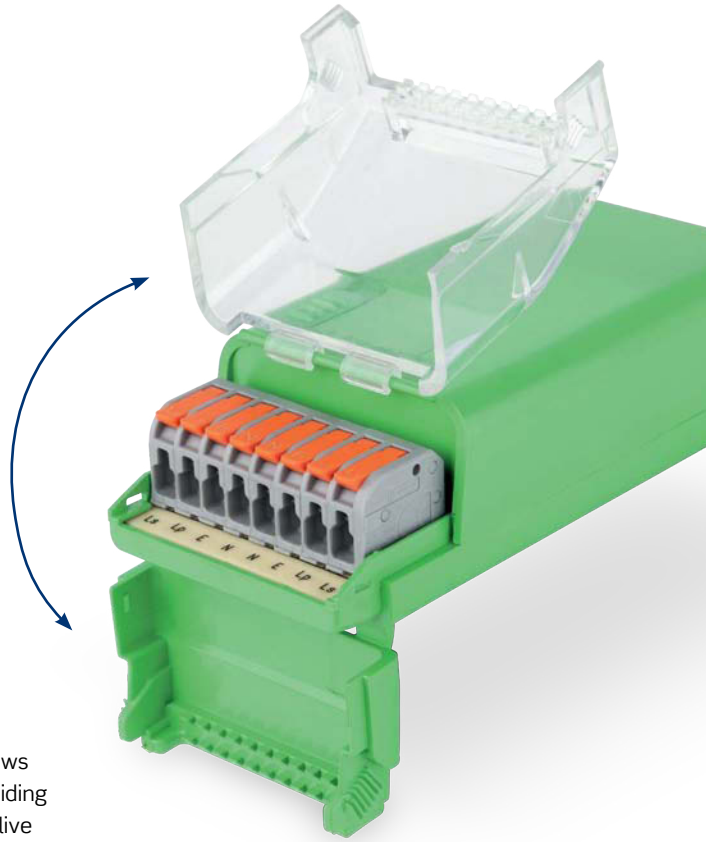

Loop-in loop-out with permanent live and earth provision

The additional terminal on the driver allows loop through wiring of 4 core cable, providing a dedicated terminal for the permanent live when wiring a circuit that consists of both emergency and non-emergency.



Three colour selectable

A simple switch on the back of the fitting allows users to choose between 3000K, 4000K or 5700K colour temperatures.



Meets TP(a) requirements

Parluma meets TP(a) requirements, making them suitable for all applications including commercial offices and schools.

Parluma
4W/6W

NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 4W/6W
- Designed for ceiling cut-outs from 68mm-76mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated

JC**73000**



JC**73001**




JC**73002**



JC**73003**





Cut-out: Ø68-76mm

IP 65 **Rating** | Class 2 | **Colour switchable** | **Wattage switchable** | 80 **CRI: Ra** | 5yr **Warranty*** | 50° **Beam** | **Dimmable options** | WH **White**

NON-DIM	TRIAC	DALI/1-10V	DESCRIPTION	WATT	LUMENS	LPCW
JC**73000**	JC**73008**	JC**73016**	Parluma with white bezel with white baffle	4W/6W	450/630	113
JC**73001**	JC**73009**	JC**73017**	Parluma with white bezel with black baffle	4W/6W	450/630	113
JC**73002**	JC**73010**	JC**73018**	Parluma with white bezel with silver baffle	4W/6W	450/630	113
JC**73003**	JC**73011**	JC**73019**	Parluma with white bezel with black nickel baffle	4W/6W	450/630	113
JC**EM002**	-	-	Emergency Remote Pack (see p.302)	-	-	

Body: PA6 Nylon. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Parluma
4W/6W

NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 4W/6W
- Designed for ceiling cut-outs from 68mm-76mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated

JC**73004**



JC**73005**




JC**73006**



JC**73007**





Cut-out: Ø68-76mm

IP 65 **Rating** | **Class 2** | **Colour switchable** | **Wattage switchable** | 80 **CRI: Ra** | 5yr **Warranty*** | 50° **Beam** | **Dimmable options** | BLK **Black**

NON-DIM	TRIAC	DALI/1-10V	DESCRIPTION	WATT	LUMENS	LPCW
JC**73004**	JC**73012**	JC**73020**	Parluma with black bezel with white baffle	4W/6W	450/630	113
JC**73005**	JC**73013**	JC**73021**	Parluma with black bezel with black baffle	4W/6W	450/630	113
JC**73006**	JC**73014**	JC**73022**	Parluma with black bezel with silver baffle	4W/6W	450/630	113
JC**73007**	JC**73015**	JC**73023**	Parluma with black bezel with black nickel baffle	4W/6W	450/630	113
JC**EM002**	-	-	Emergency Remote Pack (see p.302)	-	-	

Body: PA6 Nylon. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Parluma
6W/9W

NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 6W/9W
- Designed for ceiling cut-outs from 90mm-98mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated

JC**73024**



JC**73025**




JC**73026**



JC**73027**





Cut-out: Ø90-98mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 40° Beam | Dimmable options | WH White

NON-DIM	TRIAC	DALI/1-10V	DESCRIPTION	WATT	LUMENS	LPCW
JC**73024**	JC**73032**	JC**73040**	Parluma with white bezel with white baffle	6W/9W	700/1080	120
JC**73025**	JC**73033**	JC**73041**	Parluma with white bezel with black baffle	6W/9W	700/1080	120
JC**73026**	JC**73034**	JC**73042**	Parluma with white bezel with silver baffle	6W/9W	700/1080	120
JC**73027**	JC**73035**	JC**73043**	Parluma with white bezel with black nickel baffle	6W/9W	700/1080	120
JC**EM002**	-	-	Emergency Remote Pack (see p.302)	-	-	

Body: PA6 Nylon. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Parluma
6W/9W

NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 6W/9W
- Designed for ceiling cut-outs from 90mm-98mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated

JC**73028**



JC**73029**




JC**73030**



JC**73031**





Cut-out: Ø90-98mm

IP 65 **Rating** | **Class 2** | **Colour switchable** | **Wattage switchable** | 80 **CRI: Ra** | 5yr **Warranty*** | 40° **Beam** | **Dimmable options** | BLK **Black**

NON-DIM	TRIAC	DALI/1-10V	DESCRIPTION	WATT	LUMENS	LPCW
JC**73028**	JC**73036**	JC**73044**	Parluma with black bezel with white baffle	6W/9W	700/1080	120
JC**73029**	JC**73037**	JC**73045**	Parluma with black bezel with black baffle	6W/9W	700/1080	120
JC**73030**	JC**73038**	JC**73046**	Parluma with black bezel with silver baffle	6W/9W	700/1080	120
JC**73031**	JC**73039**	JC**73047**	Parluma with black bezel with black nickel baffle	6W/9W	700/1080	120
JC**EM002**	-	-	Emergency Remote Pack (see p.302)	-	-	

Body: PA6 Nylon. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Parluma
9W/12W

NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 9W/12W
- Designed for ceiling cut-outs from 120mm-130mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated

JC**73048**



JC**73049**




JC**73050**



JC**73051**





Cut-out: Ø120-130mm

IP 65 **Rating** | **Class 2** | **Colour switchable** | **Wattage switchable** | 80 **CRI: Ra** | 5yr **Warranty*** | 40° **Beam** | **Dimmable options** | WH **White**

NON-DIM	TRIAC	DALI/1-10V	DESCRIPTION	WATT	LUMENS	LPCW
JC**73048**	JC**73056**	JC**73064**	Parluma with white bezel with white baffle	9W/12W	1080/1440	120
JC**73049**	JC**73057**	JC**73065**	Parluma with white bezel with black baffle	9W/12W	1080/1440	120
JC**73050**	JC**73058**	JC**73066**	Parluma with white bezel with silver baffle	9W/12W	1080/1440	120
JC**73051**	JC**73059**	JC**73067**	Parluma with white bezel with black nickel baffle	9W/12W	1080/1440	120
JC**EM002**	-	-	Emergency Remote Pack (see p.302)	-	-	

Body: PA6 Nylon. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Parluma
9W/12W

NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 9W/12W
- Designed for ceiling cut-outs from 120mm-130mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated

JC**73052**



JC**73053**




JC**73054**



JC**73055**





Cut-out: Ø120-130mm

IP 65 **Rating** | **Class 2** | **Colour switchable** | **Wattage switchable** | 80 **CRI: Ra** | 5yr **Warranty*** | 40° **Beam** | **Dimmable options** | BLK **Black**

NON-DIM	TRIAC	DALI/1-10V	DESCRIPTION	WATT	LUMENS	LPCW
JC**73052**	JC**73060**	JC**73068**	Parluma with black bezel with white baffle	9W/12W	1080/1440	120
JC**73053**	JC**73061**	JC**73069**	Parluma with black bezel with black baffle	9W/12W	1080/1440	120
JC**73054**	JC**73062**	JC**73070**	Parluma with black bezel with silver baffle	9W/12W	1080/1440	120
JC**73055**	JC**73063**	JC**73071**	Parluma with black bezel with black nickel baffle	9W/12W	1080/1440	120
JC**EM002**	-	-	Emergency Remote Pack (see p.302)	-	-	

Body: PA6 Nylon. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

NEW

Rakula

High output range of commercial downlights

COLOUR SELECTABLE, 3000K/4000K/5700K



HINGED DRIVER WITH CLEAR TERMINAL COVER



PROTECTIVE & SECURE SPRING CLIP DESIGN



Rakula
7W/10W


NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 7W/10W
- Designed for ceiling cut-outs from 90mm-102mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated





Loop-in/loop-out driver



Cut-out: Ø90-102mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Dimmable options | 56° Beam | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**74000**	Rakula 114mm	3000K/4000K/5700K	No	7W/10W	840/1180	120
JC**74001**	Rakula 114mm Triac	3000K/4000K/5700K	Yes	7W/10W	840/1180	120
JC**74002**	Rakula 114mm DALI/1-10V	3000K/4000K/5700K	Yes	7W/10W	840/1180	120
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Rakula
14W/20W


NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 14W/20W
- Designed for ceiling cut-outs from 145mm-155mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated





Loop-in/loop-out driver



Cut-out: Ø145-155mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Dimmable options | 56° Beam | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**74003**	Rakula 174mm	3000K/4000K/5700K	No	14W/20W	1690/2400	121
JC**74004**	Rakula 174mm Triac	3000K/4000K/5700K	Yes	14W/20W	1690/2400	121
JC**74005**	Rakula 174mm DALI/1-10V	3000K/4000K/5700K	Yes	14W/20W	1690/2400	121
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Rakula
20W/28W


NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 20W/28W
- Designed for ceiling cut-outs from 165mm-180mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated





Loop-in/loop-out driver



Cut-out: Ø165-180mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Dimmable options | 60° Beam | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**74006**	Rakula 200mm	3000K/4000K/5700K	No	20W/28W	2400/3360	120
JC**74007**	Rakula 200mm Triac	3000K/4000K/5700K	Yes	20W/28W	2400/3360	120
JC**74008**	Rakula 200mm DALI/1-10V	3000K/4000K/5700K	Yes	20W/28W	2400/3360	120
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Rakula
24W/35W


NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 24W/35W
- Designed for ceiling cut-outs from 195mm-210mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated





Loop-in/loop-out driver



Cut-out: Ø195-210mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Dimmable options | 61° Beam | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**74009**	Rakula 232mm	3000K/4000K/5700K	No	24W/35W	3040/4270	127
JC**74010**	Rakula 232mm DALI/1-10V	3000K/4000K/5700K	Yes	24W/35W	3040/4270	127
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Rakula
35W/50W


NEW

- Three colour selectable 3000K, 4000K & 5700K
- Wattage selectable 35W/50W
- Designed for ceiling cut-outs from 240mm-255mm
- Loop-in/loop-out driver with permanent live and earth provision
- Triac, DALI/1-10V/Switch Dim available
- Manual test, self-test and DALI addressable emergency options available
- TP(a) rated





Loop-in/loop-out driver



Cut-out: Ø240-255mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Dimmable options | 61° Beam | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**74011**	Rakula 280mm	3000K/4000K/5700K	No	35W/50W	4670/6070	133
JC**74012**	Rakula 280mm DALI/1-10V	3000K/4000K/5700K	Yes	35W/50W	4670/6070	133
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

NEW

Skydisc™ CCT IP65

Colour and wattage selectable IP65 commercial downlight

COLOUR SELECTABLE, 3000K/4000K/5700K



HINGED DRIVER WITH CLEAR TERMINAL COVER



ULTRA EFFICIENT, UP TO 129LPCW



Skydisc™ CCT Dimmable
IP65 4W/6W


NEW

- IP65 suitable for use in bathrooms (internal use only)
- Two wattage and three colour selectable from fitting
- Loop-in/loop-out driver with permanent live and earth provision
- Designed for ceiling cut-outs from 100-110mm
- Polycarbonate construction
- TP(a) rated





Loop-in/loop-out driver



Cut out: Ø100-110mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 110° Beam | Emergency options | Dimmable as standard | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72001**	Skydisc CCT IP65 Triac	3000K/4000K/5700K	Yes	4W/6W	570	103
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polystyrene. **Bezel:** PA6 Nylon.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Skydisc™ CCT Non-dim
IP65 6W/9W


NEW

- IP65 suitable for use in bathrooms (internal use only)
- Two wattage and three colour selectable from fitting
- Loop-in/loop-out driver with permanent live and earth provision
- Designed for ceiling cut-outs from 150-160mm
- Polycarbonate construction
- TP(a) rated





Loop-in/loop-out driver



Cut out: Ø150-160mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 110° Beam | Emergency options | Dimmable as standard | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72002**	Skydisc CCT IP65	3000K/4000K/5700K	No	6W/9W	950	117
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polystyrene. **Bezel:** PA6 Nylon.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Skydisc™ CCT Dimmable
IP65 8W/12W


NEW

- IP65 suitable for use in bathrooms (internal use only)
- Two wattage and three colour selectable from fitting
- Loop-in/loop-out driver with permanent live and earth provision
- Designed for ceiling cut-outs from 150-160mm
- Polycarbonate construction
- TP(a) rated





Loop-in/loop-out driver



Cut out: Ø150-160mm

IP65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 110° Beam | Emergency options | Dimmable as standard | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72003**	Skydisc CCT IP65 Triac	3000K/4000K/5700K	Yes	8W/12W	1340	112
JC**72004**	Skydisc CCT IP65 DALI/1-10V	3000K/4000K/5700K	Yes	8W/12W	1340	112
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-


Body: Polycarbonate. **Diffuser:** Polystyrene. **Bezel:** PA6 Nylon.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Skydisc™ CCT Non-dim
IP65 11W/16W


NEW

- IP65 suitable for use in bathrooms (internal use only)
- Two wattage and three colour selectable from fitting
- Loop-in/loop-out driver with permanent live and earth provision
- Designed for ceiling cut-outs from 200-210mm
- Polycarbonate construction
- TP(a) rated

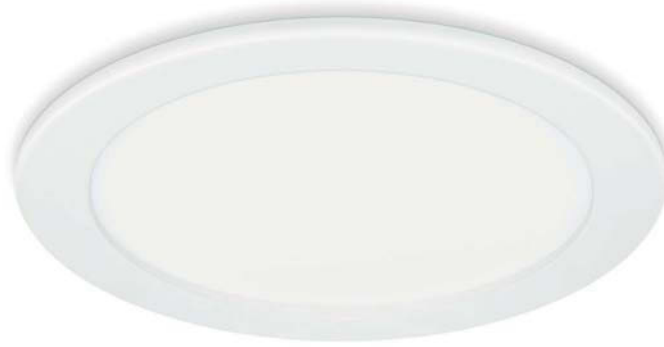



Loop-in/loop-out driver



Cut out: Ø200-210mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 110° Beam | Emergency options | Dimmable as standard | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72005**	Skydisc CCT IP65	3000K/4000K/5700K	No	11W/16W	1840	118
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-


Body: Polycarbonate. **Diffuser:** Polystyrene. **Bezel:** PA6 Nylon.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Skydisc™ CCT Dimmable
IP65 12W/17W


NEW

- IP65 suitable for use in bathrooms (internal use only)
- Two wattage and three colour selectable from fitting
- Loop-in/loop-out driver with permanent live and earth provision
- Designed for ceiling cut-outs from 200-210mm
- Polycarbonate construction
- TP(a) rated

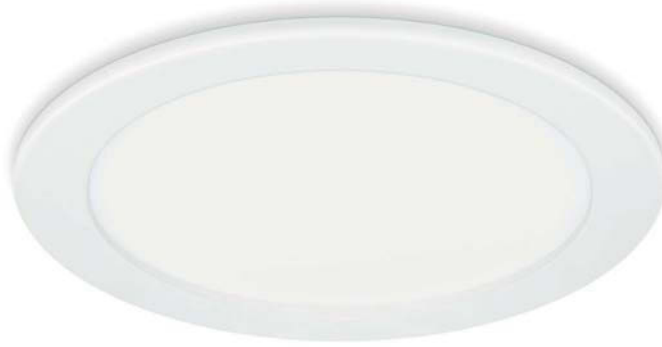



Loop-in/loop-out driver



Cut out: Ø200-210mm

IP65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 110° Beam | Emergency options | Dimmable as standard | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72006**	Skydisc CCT IP65 Triac	3000K/4000K/5700K	Yes	12W/17W	1790	129
JC**72007**	Skydisc CCT IP65 DALI/1-10V	3000K/4000K/5700K	Yes	12W/17W	1790	129
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polystyrene. **Bezel:** PA6 Nylon.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Skydisc™ CCT Non-dim
IP65 14W/20W


NEW

- IP65 suitable for use in bathrooms (internal use only)
- Two wattage and three colour selectable from fitting
- Loop-in/loop-out driver with permanent live and earth provision
- Designed for ceiling cut-outs from 220-230mm
- Polycarbonate construction
- TP(a) rated





Loop-in/loop-out driver



Cut out: Ø220-230mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 110° Beam | Emergency options | Dimmable as standard | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72008**	Skydisc CCT IP65	3000K/4000K/5700K	No	14W/20W	2310	129
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polystyrene. **Bezel:** PA6 Nylon.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Skydisc™ CCT Dimmable
IP65 14W/20W


NEW

- IP65 suitable for use in bathrooms (internal use only)
- Two wattage and three colour selectable from fitting
- Loop-in/loop-out driver with permanent live and earth provision
- Designed for ceiling cut-outs from 220-230mm
- Polycarbonate construction
- TP(a) rated





Loop-in/loop-out driver



Cut out: Ø220-230mm

IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 110° Beam | Emergency options | Dimmable as standard | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72009**	Skydisc CCT IP65 Triac	3000K/4000K/5700K	Yes	14W/20W	2310	129
JC**72010**	Skydisc CCT IP65 DALI/1-10V	3000K/4000K/5700K	Yes	14W/20W	2310	129
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polystyrene. **Bezel:** PA6 Nylon.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Skydisc™ Adjustable Wall/Ceiling Light

Adjustable downlight for walls and ceilings


ADJUSTABLE CLIPS & BRACKET



FOR CUT OUTS Ø65-205MM



EMERGENCY OPTION USING EM PACK*



*JC131001 only

Retrofit into cut-outs from Ø65-205mm

Featuring a versatile bracket with adjustable clips, Skydisc™ Adjustable allows retrofitting into ceiling cut outs from 65mm to 205mm.



Versatile mounting options








Emergency option available


Emergency option available using our remote emergency pack JC**131003** (Sold separately - for use with JC**131001** only).


Detachable decorative rims

White rim included as standard, with additional decorative rims available in black, silver and rose gold finishes (sold separately).



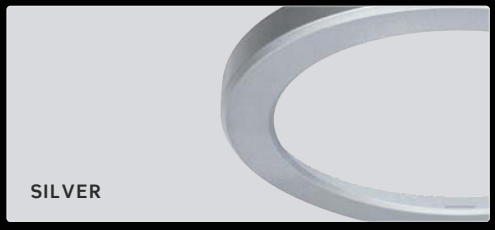

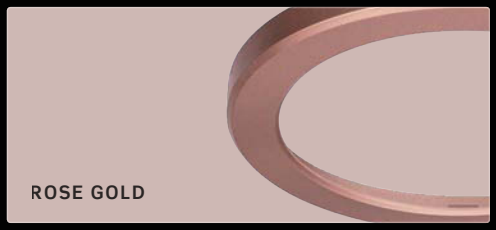

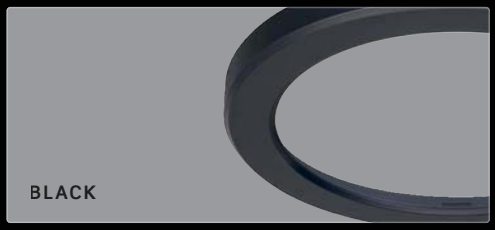



Colour switchable beneath the rim


A simple switch allows users to change between 3000K, 4000K or 5700K colour temperatures from below the ceiling (JC**131002**).

Skydisc™ Adjustable
Wall/Ceiling Light

- Adjustable from Ø65-205mm using adjustable clips & bracket
- Flexible semi-recessed or surface mounting options
- Single Colour 4000K non-dimmable option
- CCT switchable (3000K, 4000K & 5700K) beneath the rim, triac dimmable
- Emergency option available using our Emergency Remote Pack (JC**131003**)**
- Supplied with white rim as standard

JC**131001**





Cut out: Ø65-205mm

IP 20 **Rating** | **Class 2** | 83 **CRI: Ra** | 3yr **Warranty*** | **Emergency options** | **Dimmable options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**131001**	Skydisc Adjustable Wall/Ceiling Light	4000K	No	18W	1500	84
JC**131002**	Skydisc Adjustable Wall/Ceiling Light CCT	3000K, 4000K & 5700K	Yes	18W	1500-1700	84
JC**131003****	Emergency Remote Pack	-	-	-	-	-

For use with JC131001** only.
Body: Polycarbonate. **Diffuser:** Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Skydisc™ Adjustable
Wall/Ceiling Rims

- Decorative rims available in black, silver & rose gold finishes


JC**131004**




JC**131005**



JC**131006**



BLK **Black** SIL **Silver** RG **Rose Gold**



CODE	DESCRIPTION
JC**131004**	Silver Rim
JC**131005**	Black Rim
JC**131006**	Rose Gold Rim


Rim: Polycarbonate.

Nebula™

High Output 8W

- Triac and DALI/1-10V dimmable options available
- Slim profile bezel for discreet installations
- Designed for ceiling cut-outs from 68-75mm
- Available in 3000K or 4000K





Cut out: Ø68-75mm

IP 65 **Rating** | Class 2 | 80 **CRI: Ra** | 5yr **Warranty*** | 36° **Beam** | **Emergency options** | **Dimmable options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**95301**	Slim Bezel LED Downlight Triac	3000K	Yes	8W	770	97
JC**95301DALI**	Slim Bezel LED Downlight DALI/1-10V	3000K	Yes	8W	770	97
JC**95302**	Slim Bezel LED Downlight Triac	4000K	Yes	8W	840	105
JC**95302DALI**	Slim Bezel LED Downlight DALI/1-10V	4000K	Yes	8W	840	105
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Lens:** Polycarbonate. **Bezel:** Aluminium.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Nebula™

High Output 10W

- Triac and DALI/1-10V dimmable options available
- Slim profile bezel for discreet installations
- Designed for ceiling cut-outs from 90-95mm
- Available in 3000K or 4000K





Cut out: Ø90-95mm

IP 65 **Rating** | Class 2 | 80 **CRI: Ra** | 5yr **Warranty*** | 60° **Beam** | **Emergency options** | **Dimmable options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**95303**	Slim Bezel LED Downlight Triac	3000K	Yes	10W	820	82
JC**95303DALI**	Slim Bezel LED Downlight DALI/1-10V	3000K	Yes	10W	820	82
JC**95304**	Slim Bezel LED Downlight Triac	4000K	Yes	10W	890	89
JC**95304DALI**	Slim Bezel LED Downlight DALI/1-10V	4000K	Yes	10W	890	89
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Lens:** Polycarbonate. **Bezel:** Aluminium.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Nebula™

High Output 13W

- Triac and DALI/1-10V dimmable options available
- Slim profile bezel for discreet installations
- Designed for ceiling cut-outs from 90-95mm
- Available in 3000K or 4000K





Cut out: Ø90-95mm

IP 65 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | 60° Beam | Emergency options | Dimmable options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**95305**	Slim Bezel LED Downlight Triac	3000K	Yes	13W	950	73
JC**95305DALI**	Slim Bezel LED Downlight DALI/1-10V	3000K	Yes	13W	950	73
JC**95306**	Slim Bezel LED Downlight Triac	4000K	Yes	13W	1200	92
JC**95306DALI**	Slim Bezel LED Downlight DALI/1-10V	4000K	Yes	13W	1200	92
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Lens:** Polycarbonate. **Bezel:** Aluminium.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Nebula™

High Output Tilt 8W

- 30° tiltable
- Triac and DALI/1-10V dimmable options available
- Slim profile bezel for discreet installations
- Designed for ceiling cut-outs from 68-75mm





Cut out: Ø68-75mm

IP 65 **Rating** | **Class 2** | 80 **CRI: Ra** | 5yr **Warranty*** | 36° **Beam** | **Dimmable options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**95401**	Slim Bezel LED Downlight Tilt Triac	3000K	Yes	8W	770	97
JC**95401DALI**	Slim Bezel LED Downlight Tilt DALI/1-10V	3000K	Yes	8W	770	97
JC**95402**	Slim Bezel LED Downlight Tilt Triac	4000K	Yes	8W	840	105
JC**95402DALI**	Slim Bezel LED Downlight Tilt DALI/1-10V	4000K	Yes	8W	840	105

Body: Aluminium. **Lens:** Polycarbonate. **Bezel:** Aluminium.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Nebula™

High Output Tilt 10W

- 30° tiltable
- Triac and DALI/1-10V dimmable options available
- Slim profile bezel for discreet installations
- Designed for ceiling cut-outs from 90-95mm





Cut out: Ø90-95mm

IP 65 **Rating** | Class 2 | 80 **CRI: Ra** | 5yr **Warranty*** | 36° **Beam** | **Dimmable options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**95403**	Slim Bezel LED Downlight Tilt Triac	3000K	Yes	10W	820	82
JC**95403DALI**	Slim Bezel LED Downlight Tilt DALI/1-10V	3000K	Yes	10W	820	82
JC**95404**	Slim Bezel LED Downlight Tilt Triac	4000K	Yes	10W	890	89
JC**95404DALI**	Slim Bezel LED Downlight Tilt DALI/1-10V	4000K	Yes	10W	890	89

Body: Aluminium. **Lens:** Polycarbonate. **Bezel:** Aluminium.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Nebula™

High Output Tilt 13W

- 30° tiltable
- Triac and DALI/1-10V dimmable options available
- Slim profile bezel for discreet installations
- Designed for ceiling cut-outs from 90-95mm





Cut out: Ø90-95mm

IP 65 **Rating** | Class 2 | 80 **CRI: Ra** | 5yr **Warranty*** | 36° **Beam** | **Dimmable options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**95505**	Slim Bezel LED Downlight Tilt Triac	3000K	Yes	13W	950	73
JC**95505DALI**	Slim Bezel LED Downlight Tilt DALI/1-10V	3000K	Yes	13W	950	73
JC**95606**	Slim Bezel LED Downlight Tilt Triac	4000K	Yes	13W	1200	92
JC**95606DALI**	Slim Bezel LED Downlight Tilt DALI/1-10V	4000K	Yes	13W	1200	92

Body: Aluminium. **Lens:** Polycarbonate. **Bezel:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.



Coral LED™ Plus

High performance commercial LED downlight

ENERGY EFFICIENT, UP TO 133 LPCW



COLOUR SWITCHABLE VIA INLINE SWITCH



LOW PROFILE, SUITABLE FOR SHALLOW CEILING VOIDS



Low profile, suitable for shallow ceiling voids

Coral™ LED Plus features a low profile design, enabling the fitting to be installed into shallow ceiling voids.





Energy efficient performance

Performance of up to 133 lpcW, exceeding the requirements for part L of the building regulations in commercial environments.


Three colour switchable

A simple inline switch on Coral LED™ Plus allows users to choose between 3000K, 4000K or 5700K colour temperatures.

Coral LED™ Plus
13W

- Energy efficient performance of 131 lpcW
- CRI 85, suitable for retail applications
- Low profile, suitable for shallow ceiling voids
- Designed for ceiling cut-outs from 200-210mm
- External flicker free driver
- IP54 rated



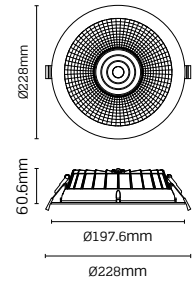

Cut out: Ø200-210mm

IP 54 Rating | Class 2 | Colour switchable | 85 CRI: Ra | 5yr Warranty* | 60° Beam | Emergency options | Dimmable options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**5500**	Coral LED Plus	3000K/4000K/5700K	No	13W	1700	131
JC**5501**	Coral LED Plus DALI/1-10V	3000K/4000K/5700K	No	13W	1700	131
JC**5502**	Coral LED Plus DSI	3000K/4000K/5700K	No	13W	1700	131
JC**EM002**	Emergency Remote Pack (see p.302)					
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)					
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)					


Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Coral LED™ Plus
18W

- Energy efficient performance of 133 lpcW
- CRI 85, suitable for retail applications
- Low profile, suitable for shallow ceiling voids
- Designed for ceiling cut-outs from 200-210mm
- External flicker free driver
- IP54 rated





Cut out: Ø200-210mm

IP 54 Rating | Class 2 | Colour switchable | 85 CRI: Ra | 5yr Warranty* | 60° Beam | Emergency options | Dimmable options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**5503**	Coral LED Plus	3000K/4000K/5700K	No	18W	2400	133
JC**5504**	Coral LED Plus DALI/1-10V	3000K/4000K/5700K	No	18W	2400	133
JC**5505**	Coral LED Plus DSI	3000K/4000K/5700K	No	18W	2400	133
JC**EM002**	Emergency Remote Pack (see p.302)					
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)					
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)					


Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Coral LED™ Plus
25W

- Energy efficient performance of 132 lpcW
- CRI 85, suitable for retail applications
- Low profile, suitable for shallow ceiling voids
- Designed for ceiling cut-outs from 200-210mm
- External flicker free driver
- IP54 rated





Cut out: Ø200-210mm

IP 54 Rating | Class 2 | Colour switchable | 85 CRI: Ra | 5yr Warranty* | 60° Beam | Emergency options | Dimmable options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**5506**	Coral LED Plus	3000K/4000K/5700K	No	25W	3300	132
JC**5507**	Coral LED Plus DALI/1-10V	3000K/4000K/5700K	No	25W	3300	132
JC**5508**	Coral LED Plus DSI	3000K/4000K/5700K	No	25W	3300	132
JC**EM002**	Emergency Remote Pack (see p.302)					
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)					
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)					

Body: Aluminium. **Lens:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.




Commercial Downlight

- Designed for ceiling cut-outs from 120-130mm (JC**54301**) and 160-170mm (JC**54302**)
- Available in two sizes 145mm and 190mm diameter
- DALI and 1-10V dimming options available





18 & 25W
Cut out: Ø120-130mm



35W
Cut out: Ø160-170mm

IP 54 **Rating** | Class 2 | 80 **CRI: Ra** | 5yr **Warranty*** | 60° **Beam** | **Emergency options** | **Dimmable options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**54300**	Commercial Downlight	4000K	No	18W	1960	109
JC**54300DIM**	Commercial Downlight DALI/1-10V	4000K	Yes	18W	1960	109
JC**54301**	Commercial Downlight	4000K	No	25W	2700	108
JC**54301DIM**	Commercial Downlight DALI/1-10V	4000K	Yes	25W	2700	108
JC**54302**	Commercial Downlight	4000K	No	35W	3960	113
JC**54302DIM**	Commercial Downlight DALI/1-10V	4000K	Yes	35W	3960	113
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-


Body: Aluminium. **Lens:** Polycarbonate. **Bezel:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Starscoop™ Linear

- 45° tiltable LED module
- Durable die-cast aluminium construction





IP 20 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**47440WH**	Starscoop Linear	4000K	No	40W	4050	101
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-

Body: Aluminium. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Starscoop™
20W


- Designed for ceiling cut-outs from 120-130mm
- 350° rotatable and 35° tiltable

JC**47441WH**



JC**47441BLK**





Cut out: Ø120-130mm

IP 20 **Rating** | **Class 2** | 80 **CRI: Ra** | 5yr **Warranty*** | 36° **Beam** | **Emergency options** | WH **White** | BLK **Black**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**47441**	Starscoop	4000K	No	20W	2020	101
JC**47441BLKDALI**	Starscoop DALI	4000K	No	20W	2020	101
JC**47441WHDALI**	Starscoop DALI	4000K	No	20W	2020	101
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-

For Black add **BLK** suffix, for White add **WH** suffix.
Body: Aluminium. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Starscoop™
35W


- Designed for ceiling cut-outs from 165-170mm
- 350° rotatable and 35° tiltable

JC**47442WH**



JC**47442BLK**





Cut out: Ø165-170mm

IP 20 **Rating** | **Class 2** | 80 **CRI: Ra** | 5yr **Warranty*** | 45° **Beam** | **Emergency options** | WH **White** | BLK **Black**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**47442**	Starscoop	4000K	No	35W	3400	97
JC**47442BLKDALI**	Starscoop DALI	4000K	No	35W	3400	97
JC**47442WHDALI**	Starscoop DALI	4000K	No	35W	3400	97
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-


For Black add **BLK** suffix, for White add **WH** suffix.
Body: Aluminium. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Surface Downlight
Round GU10

- Suitable for GU10 LED lamps up to 7W
- Lamp not supplied





IP 20 Rating | Class 1 | 3yr Warranty* | Lamp not supplied | BLK Black

CODE	DESCRIPTION	LAMP
JC**84320BLK**	Surface Downlight Round GU10	GU10 7W LED Max

Body: Die-cast aluminium. **Lens:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.



Surface Downlight
Round Tiltable GU10

- Suitable for GU10 LED lamps up to 7W
- 15° Tilt
- Lamp not supplied





IP 20 **Rating** | Class 1 | 3yr **Warranty*** | **Lamp not supplied** | BLK **Black**

CODE	DESCRIPTION	LAMP
JC**84319BLK**	Surface Downlight Round Tilt GU10	GU10 7W LED Max


Body: Die-cast aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Surface Downlight
Square Tiltable GU10

- Suitable for GU10 LED lamps up to 7W
- 15° Tilt
- Lamp not supplied





IP 20 **Rating** | **Class 1** | 3yr **Warranty*** | **Lamp not supplied** | BLK **Black**

CODE	DESCRIPTION	LAMP
JC**84318BLK**	Surface Downlight Square Tilt GU10	GU10 7W LED Max

Body: Die-cast aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Surface Downlight
10W


- Triac dimmable as standard

JC**84300BLK**



JC**84300WH**





IP 54 **Rating** | **Class 1** | 80 **CRI: Ra** | 3yr **Warranty*** | 60° **Beam** | **Dimmable as standard** | WH **White** | BLK **Black**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**84300**	Surface Downlight Triac	4000K	Yes	10W	950	95

For Black add **BLK** suffix, for White add **WH** suffix.
Body: Aluminium. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.



LED Panels

Skytile® Base CCT 600 x 600 134

Skytile® Base CCT 600 x 600 Low Output 136

Skytile® Base CCT 600 x 600 High Output 137

Skytile® Base CCT 1200 x 300 138

Skytile® Base CCT 1200 x 600 139

Skytile® 600 x 600 TP(a) UGR 142

Skytile® Linear 1200 x 300 TP(a) UGR 144

Skytile® Linear 1200 x 600 TP(a) UGR 145

Skytile® IP65 146

Skytile® Direct/Indirect 148

Skytile® Surface Mount box 151

Skytile® Suspension Kit 153

Skytile® Base CCT

Colour switchable backlit LED panel

COLOUR SELECTABLE, 3000K/4000K/5700K



TP(a) RATED, SUITABLE FOR ALL APPLICATIONS



HINGED DRIVER, COLOUR CODED TERMINALS



Options to suit any application

Skytile® Base CCT is available in 600mm x 600mm, 1200mm x 300mm, and 1200mm x 600mm options, as well as low, standard and high output options*. DALI, 1-10V, switch dimmable, or DSI dimmable options also available.



600 x 600
Standard, UGR and multiple dimming options available. Up to 4620 lumens.



1200 x 300
Standard, UGR and multiple dimming options available. Up to 3600 lumens.



1200 x 600
Standard, UGR and multiple dimming options available. Up to 5100 lumens.

*Low and high outputs only available for 600 x 600 panel.

Loop-in loop-out with permanent live and earth provision

Additional terminal allows for loop through wiring of 4 core cable. Dedicated terminal for permanent live when wiring a circuit consisting of emergency and non-emergency.

DOUBLE HINGED TERMINAL WITH CLEAR COVER




Three colour selectable from the back of the panel

A simple switch on the back of the panel allows users to choose between 3000K, 4000K or 5700K colour temperatures to suit a variety of applications.

Permanent live and earth provision to simplify emergency wiring


The additional terminal on the driver allows loop through wiring of 4 core cable, providing a dedicated terminal for the permanent live when wiring a circuit that consists of both emergency and non-emergency. Saving time, and avoiding the requirement for additional connectors and accessories.

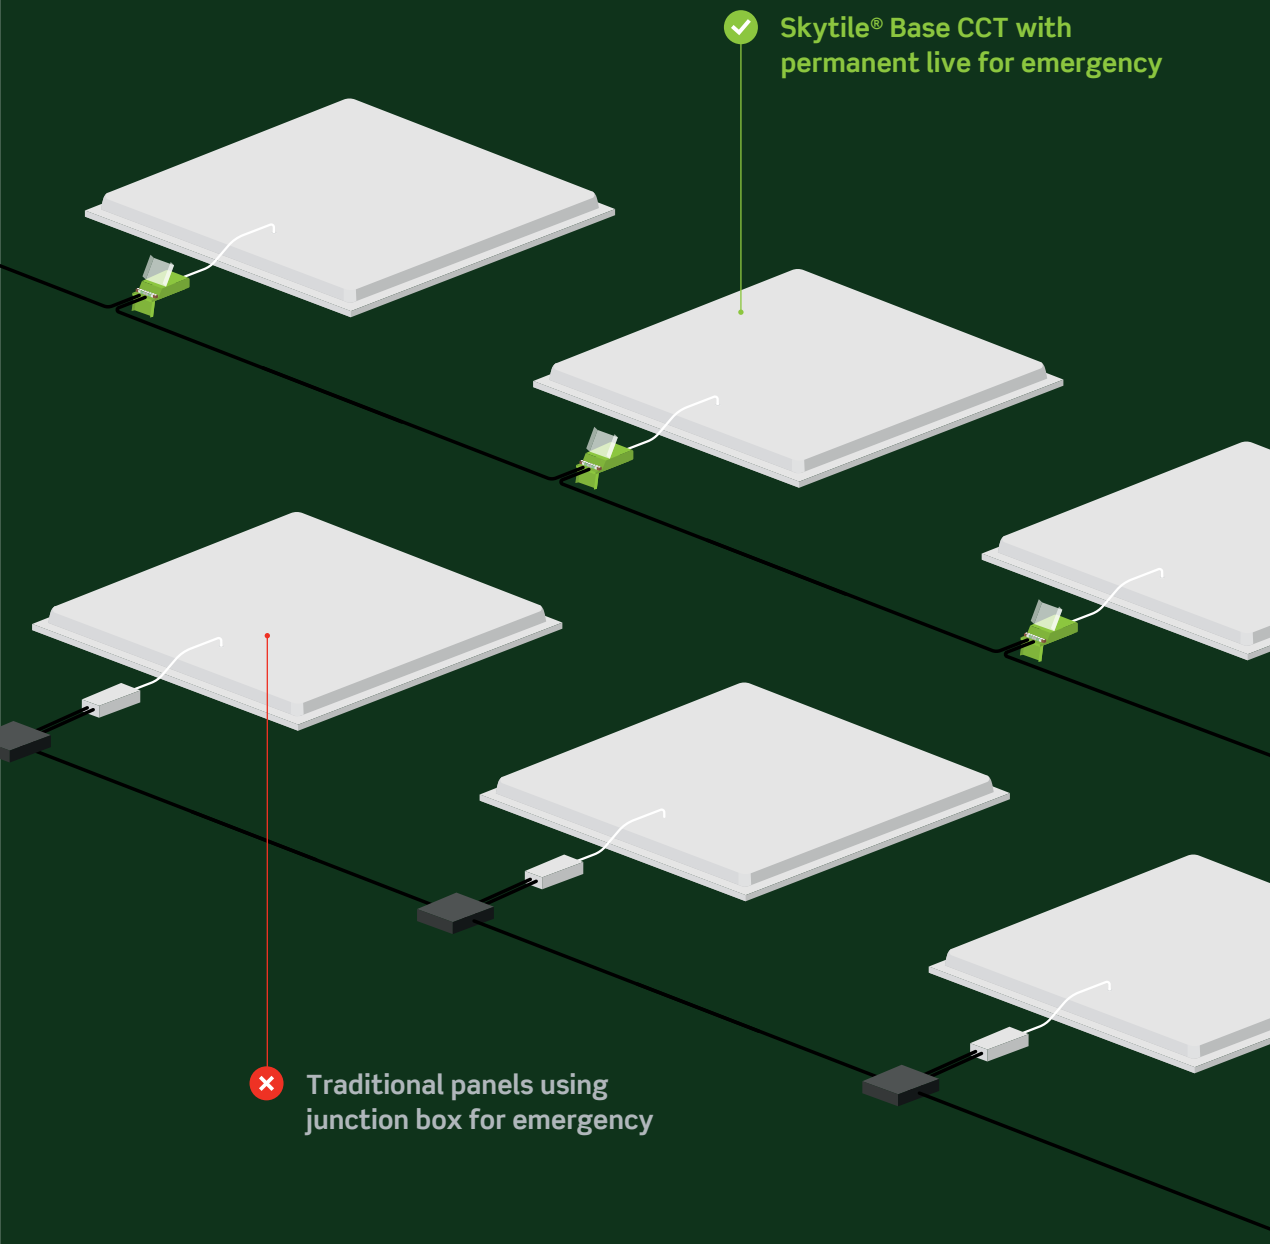

Skytile® Base CCT
600 x 600

- Colour selectable, 3000K/4000K/5700K
- Meets TP(a) requirements, suitable for all applications
- UGR <19 options available
- Hinged driver with colour coded terminals
- Loop-in loop-out with permanent live and earth provision
- Emergency remote pack options available (see p.302)

IP40 Rating | Class 2 | Colour switchable | 82-85 CRI: Ra | 5yr Warranty* | 87° Beam | 113° Beam | Emergency options | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**080218**	Skytile Base CCT TP(a)	3000K/4000K/5700K	No	30W	3300/3760/3500
JC**080219**	Skytile Base CCT TP(a) DALI/1-10V/Switch Dim.	3000K/4000K/5700K	Yes	30W	3300/3760/3500
JC**080220**	Skytile Base CCT TP(a) DSI	3000K/4000K/5700K	Yes	30W	2950/3350/3150
JC**080203**	Skytile Base CCT TP(a) UGR	3000K/4000K/5700K	No	30W	2950/3350/3150
JC**080236**	Skytile Base CCT TP(a) Triac	3000K/4000K/5700K	Yes	30W	2950/3350/3150
JC**080204**	Skytile Base CCT TP(a) UGR DALI/1-10V/Switch Dim.	3000K/4000K/5700K	Yes	30W	2950/3350/3150
JC**080205**	Skytile Base CCT TP(a) UGR DSI	3000K/4000K/5700K	Yes	30W	2950/3350/3150
JC**080231**	Skytile Base CCT TP(a) UGR Triac	3000K/4000K/5700K	Yes	30W	2950/3350/3150
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-
JC**080050**	4 wire 1.5m Suspension Kit	-	-	-	-
JC**71262**	Surface Mount Tray	-	-	-	-

Body: Steel. **Lens:** PS. **Bracket:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.




Skytile® Base CCT Low Output
600 x 600

- Colour selectable, 3000K/4000K/5700K
- Meets TP(a) requirements, suitable for all applications
- UGR <19 options available
- Hinged driver with colour coded terminals
- Loop-in loop-out with permanent live and earth provision
- Emergency remote pack options available (see p.302)



Rating | Class 2 | Colour switchable | CRI: Ra | Warranty* | Beam | Beam | Emergency options | White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**080215**	Skytile Base CCT TP(a) Low Output	3000K/4000K/5700K	No	16W	1930/2100/2050
JC**080216**	Skytile Base CCT TP(a) DALI/1-10V/Sw. Dim. Low Output	3000K/4000K/5700K	Yes	16W	1930/2100/2050
JC**080217**	Skytile Base CCT TP(a) DSI Low Output	3000K/4000K/5700K	Yes	16W	1930/2100/2050
JC**080235**	Skytile Base CCT TP(a) Triac Low Output	3000K/4000K/5700K	No	16W	1750/1900/1850
JC**080200**	Skytile Base CCT TP(a) UGR Low Output	3000K/4000K/5700K	No	16W	1750/1900/1850
JC**080201**	Skytile Base CCT TP(a) UGR DALI/1-10V/Switch Dim. Low Output	3000K/4000K/5700K	No	16W	1750/1900/1850
JC**080202**	Skytile Base CCT TP(a) UGR DSI Low Output	3000K/4000K/5700K	No	16W	1750/1900/1850
JC**080230**	Skytile Base CCT TP(a) UGR Triac Low Output	3000K/4000K/5700K	Yes	16W	1930/2100/2050
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-
JC**080050**	4 wire 1.5m Suspension Kit	-	-	-	-
JC**71262**	Surface Mount Tray	-	-	-	-


Body: Steel. **Lens:** PS. **Bracket:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skytile® Base CCT High Output
600 x 600

- Colour selectable, 3000K/4000K/5700K
- Meets TP(a) requirements, suitable for all applications
- UGR <19 options available
- Hinged driver with colour coded terminals
- Loop-in loop-out with permanent live and earth provision
- Emergency remote pack options available (see p.302)






CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**080221**	Skytile Base CCT TP(a) High Output	3000K/4000K/5700K	No	38W	3950/4620/4200
JC**080222**	Skytile Base CCT TP(a) DALI/1-10V/Sw. Dim. High Output	3000K/4000K/5700K	Yes	38W	3950/4620/4200
JC**080223**	Skytile Base CCT TP(a) DSI High Output	3000K/4000K/5700K	Yes	38W	3950/4620/4200
JC**080206**	Skytile Base CCT TP(a) UGR High Output	3000K/4000K/5700K	No	38W	3700/4100/3750
JC**080207**	Skytile Base CCT TP(a) UGR DALI/1-10V/Switch Dim. High Output	3000K/4000K/5700K	Yes	38W	3700/4100/3750
JC**080208**	Skytile Base CCT TP(a) UGR DSI High Output	3000K/4000K/5700K	Yes	38W	3700/4100/3750
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-
JC**080050**	4 wire 1.5m Suspension Kit	-	-	-	-
JC**71262**	Surface Mount Tray	-	-	-	-

Body: Steel. **Lens:** PS. **Bracket:** Aluminium.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skytile® Base CCT
1200 x 300

- Colour selectable, 3000K/4000K/5700K
- Meets TP(a) requirements, suitable for all applications
- UGR <19 options available
- Hinged driver with colour coded terminals
- Loop-in loop-out with permanent live and earth provision
- Emergency remote pack options available (see p.302)

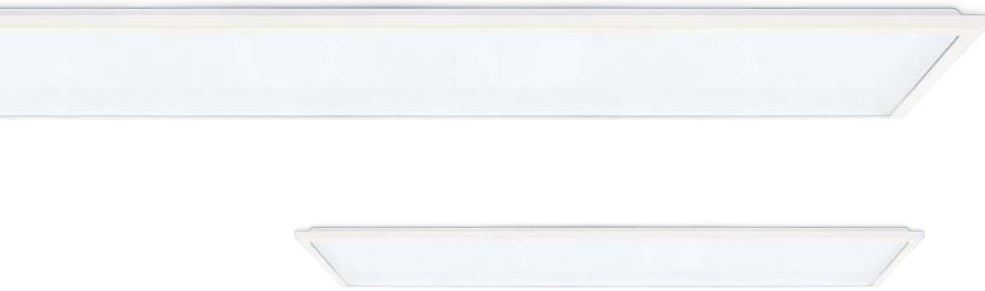

IP 40 Rating | Class 2 | Colour switchable | 82-85 CRI: Ra | 5yr Warranty* | 87° Beam | 113° Beam | Emergency options | WH White




CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**080224**	Skytile Base 1200 x 300 TP(a)	3000K/4000K/5700K	No	30W	3200/3600/3400
JC**080225**	Skytile Base 1200 x 300 TP(a) DALI/1-10V/Switch Dim.	3000K/4000K/5700K	No	30W	3200/3600/3400
JC**080226**	Skytile Base 1200 x 300 TP(a) DSI	3000K/4000K/5700K	No	30W	3200/3600/3400
JC**080238**	Skytile Base 1200 x 300 TP(a) Triac	3000K/4000K/5700K	No	30W	2900/3220/3050
JC**080209**	Skytile Base 1200 x 300 TP(a) UGR	3000K/4000K/5700K	No	30W	2900/3220/3050
JC**080210**	Skytile Base 1200 x 300 TP(a) UGR DALI/1-10V/Sw. Dim.	3000K/4000K/5700K	No	30W	2900/3220/3050
JC**080211**	Skytile Base 1200 x 300 TP(a) UGR DSI	3000K/4000K/5700K	No	30W	2900/3220/3050
JC**080233**	Skytile Base 1200 x 300 TP(a) UGR Triac	3000K/4000K/5700K	No	30W	2900/3220/3050
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-
JC**080050**	4 wire 1.5m Suspension Kit	-	-	-	-
JC**71299**	1200 x 300mm Surface mount box	-	-	-	-


Body: Steel. **Lens:** PS. **Bracket:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skytile® Base CCT
1200 x 600

- Colour selectable, 3000K/4000K/5700K
- Meets TP(a) requirements, suitable for all applications
- UGR <19 options available
- Hinged driver with colour coded terminals
- Loop-in loop-out with permanent live and earth provision
- Emergency remote pack options available (see p.302)

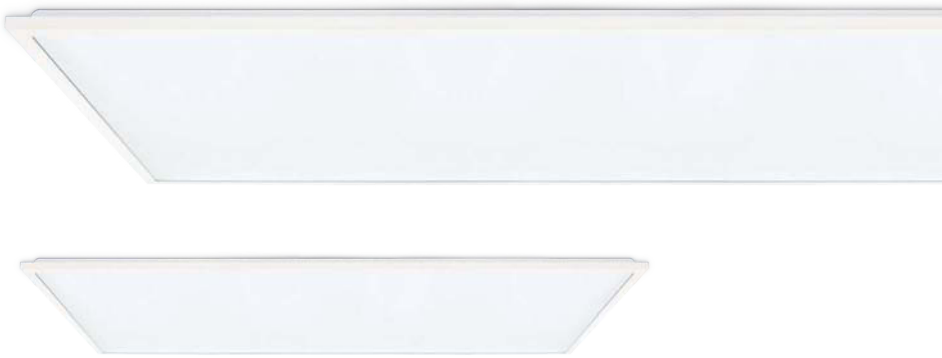



IP 40 Rating | Class 2 | Colour switchable | 82-85 CRI: Ra | 5yr Warranty* | 87° Beam | 113° Beam | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**080227**	Skytile Base 1200 x 600 TP(a)	3000K/4000K/5700K	No	40W	4600/5100/4900
JC**080228**	Skytile Base 1200 x 600 TP(a) DALI/1-10V/Switch Dim.	3000K/4000K/5700K	No	40W	4600/5100/4900
JC**080229**	Skytile Base 1200 x 600 TP(a) DSI	3000K/4000K/5700K	No	40W	4600/5100/4900
JC**080239**	Skytile Base 1200 x 600 TP(a) Triac	3000K/4000K/5700K	No	30W	4400/4850/4700
JC**080212**	Skytile Base 1200 x 600 TP(a) UGR	3000K/4000K/5700K	No	40W	4400/4850/4700
JC**080213**	Skytile Base 1200 x 600 TP(a) UGR DALI/1-10V/Sw. Dim.	3000K/4000K/5700K	No	40W	4400/4850/4700
JC**080214**	Skytile Base 1200 x 600 TP(a) UGR DSI	3000K/4000K/5700K	No	40W	4400/4850/4700
JC**080234**	Skytile Base 1200 x 600 TP(a) UGR Triac	3000K/4000K/5700K	No	30W	4400/4850/4700
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-
JC**080066**	6 wire suspension kit (1.5m)	-	-	-	-
JC**71295**	1200 x 600mm Surface mount box	-	-	-	-

Body: Steel. **Lens:** PS. **Bracket:** Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.


opus®
ELECTRICAL

The loop-in loop-out 8 way driver is a great addition, and saves us the cost of junction boxes and multiple connectors for projects that need earth or emergency continuity.

SAM STEWART

Opus Electrical

Scan QR for electrician video


Skytile®

600 x 600 TP(a) UGR

- **5 year extended warranty, including 2 year on-site support**
- UGR <19 as standard
- DALI, DSI and 1-10V dimmable options available
- Emergency remote pack options available (see p.302)
- Designed to comply with BS EN 12464-1 lighting of work places



IP 44 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | 2yr On-site | 90° Beam | Emergency options | Dimmable options | UGR <19 | WH White



CODE	DESCRIPTION	COL TEMP.	DIM	WATT	LUMENS	LPCW
JC**080100**	Skytile TP(a) UGR	3000K	No	30W	3000	100
JC**080101**	Skytile TP(a) UGR 1-10V	3000K	Yes	30W	3000	100
JC**080102**	Skytile TP(a) UGR DALI	3000K	Yes	30W	3000	100
JC**080103**	Skytile TP(a) UGR DSI	3000K	Yes	30W	3000	100
JC**080104**	Skytile TP(a) UGR	4000K	No	30W	3000	100
JC**080105**	Skytile TP(a) UGR 1-10V	4000K	Yes	30W	3000	100
JC**080106**	Skytile TP(a) UGR DALI	4000K	Yes	30W	3000	100
JC**080107**	Skytile TP(a) UGR DSI	4000K	Yes	30W	3000	100
JC**080108**	Skytile TP(a) UGR	5700K	No	30W	3000	100
JC**080109**	Skytile TP(a) UGR 1-10V	5700K	Yes	30W	3000	100
JC**080110**	Skytile TP(a) UGR DALI	5700K	Yes	30W	3000	100
JC**080111**	Skytile TP(a) UGR DSI	5700K	Yes	30W	3000	100
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**71311**	4 wire suspension kit (1.5m)	-	-	-	-	-
JC**71262**	600 x 600mm Surface mount box	-	-	-	-	-

Body: Aluminium. **Diffuser:** Opal TP(b) Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.



Skytile® Linear
1200 x 300 TP(a) UGR

- **5 year extended warranty, including 2 year on-site support**
- UGR <19 as standard
- DALI, DSI and 1-10V dimmable options available
- Emergency remote pack options available (see p.302)
- Designed to comply with BS EN 12464-1 lighting of work places





IP 44 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | 2yr On-site | 90° Beam | Emergency options | Dimmable options | UGR <19 | WH White

CODE	DESCRIPTION	COL TEMP.	DIM	WATT	LUMENS	LPCW
JC**080116**	Skytile Linear 1200 x 300 TP(a) UGR	4000K	No	30W	3000	100
JC**080117**	Skytile Linear 1200 x 300 TP(a) UGR 1-10V	4000K	Yes	30W	3000	100
JC**080118**	Skytile Linear 1200 x 300 TP(a) UGR DALI	4000K	Yes	30W	3000	100
JC**080119**	Skytile Linear 1200 x 300 TP(a) UGR DSI	4000K	Yes	30W	3000	100
JC**080120**	Skytile Linear 1200 x 300 TP(a) UGR	5700K	No	30W	3000	100
JC**080121**	Skytile Linear 1200 x 300 TP(a) UGR 1-10V	5700K	Yes	30W	3000	100
JC**080122**	Skytile Linear 1200 x 300 TP(a) UGR DALI	5700K	Yes	30W	3000	100
JC**080123**	Skytile Linear 1200 x 300 TP(a) UGR DSI	5700K	Yes	30W	3000	100
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**71312**	6 wire suspension kit (1.5m)	-	-	-	-	-
JC**71299**	1200 x 300mm Surface mount box	-	-	-	-	-


Body: Aluminium. **Diffuser:** TP(b) polystyrene.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skytile® Linear
1200 x 600 TP(a) UGR

- **5 year extended warranty, including 2 year on-site support**
- UGR <19 as standard
- DALI, DSI and 1-10V dimmable options available
- Emergency remote pack options available (see p.302)
- Designed to comply with BS EN 12464-1 lighting of work places





IP 44 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | 2yr On-site | 90° Beam | Emergency options | Dimmable options | UGR <19 | WH White

CODE	DESCRIPTION	COL TEMP.	DIM	WATT	LUMENS	LPCW
JC**080128**	Skytile Linear 1200 x 600 TP(a) UGR	4000K	No	48W	4800	100
JC**080129**	Skytile Linear 1200 x 600 TP(a) UGR 1-10V	4000K	Yes	48W	4800	100
JC**080130**	Skytile Linear 1200 x 600 TP(a) UGR DALI	4000K	Yes	48W	4800	100
JC**080131**	Skytile Linear 1200 x 600 TP(a) UGR DSI	4000K	Yes	48W	4800	100
JC**080132**	Skytile Linear 1200 x 600 TP(a) UGR	5700K	No	48W	4800	100
JC**080133**	Skytile Linear 1200 x 600 TP(a) UGR 1-10V	5700K	Yes	48W	4800	100
JC**080134**	Skytile Linear 1200 x 600 TP(a) UGR DALI	5700K	Yes	48W	4800	100
JC**080135**	Skytile Linear 1200 x 600 TP(a) UGR DSI	5700K	Yes	48W	4800	100
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**71312**	6 wire suspension kit (1.5m)	-	-	-	-	-
JC**71295**	1200 x 600mm Surface mount box	-	-	-	-	-

Body: Aluminium. **Diffuser:** TP(b) polystyrene.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.


Skytile® IP65

IP65 rated addition to our LED panel range

IP65 - EXTRA PROTECTION FOR DUST AND MOISTURE



GASKET MAINTAINS IP RATING ON EM VARIANTS*



5YR WARRANTY INCLUDING BATTERY



*IP65 from below the ceiling.

Skytile®
IP65

- IP65 rated protection against dust and moisture
- IP rating is maintained on emergency fittings
- IK06 rated construction
- Flicker free driver
- Up to 100LpcW





Rating


Class 2



CRI: Ra




Warranty*


Emergency options



White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**080053**	Skytile IP65	4000K	No	33W	3300	100
JC**080053DALI**	Skytile IP65 DALI	4000K	No	33W	3300	100
JC**080053EM**	Skytile IP65 Emergency	4000K	No	33W	3300	100
JC**080053EMST**	Skytile IP65 Emergency Self-Test	4000K	No	33W	3300	100

Body: Aluminium. **Diffuser:** TP(b) polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skytile® Direct/Indirect
600 x 600 TP(a) UGR

NEW

- Colour selectable, 3000K/4000K/5700K
- UGR <19 as standard
- DALI and 1-10V dimmable options available
- Emergency remote pack options available (see p.302)





IP 20 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Emergency options | Dimmable options | UGR <19 | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**080250**	Skytile Direct/Indirect TP(a) UGR	3000K/4000K/5700K	No	23W/34W	2900/4080	126/120
JC**080251**	Skytile Direct/Indirect TP(a) UGR DALI/1-10V Switch Dim.	3000K/4000K/5700K	Yes	23W/34W	2900/4080	126/120
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)		-	-	-	-
JC**080262**	Skytile Surface Mount Box 600 x 600	-	-	-	-	-

Body: Steel. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skytile® Direct/Indirect
1200 x 300 TP(a) UGR

NEW

- Colour selectable, 3000K/4000K/5700K
- UGR <19 as standard
- DALI and 1-10V dimmable options available
- Emergency remote pack options available (see p.302)





IP 20 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Emergency options | Dimmable options | UGR <19 | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**080254**	Skytile Direct/Indirect TP(a) UGR	3000K/4000K/5700K	No	23W/34W	2645/4080	120
JC**080255**	Skytile Direct/Indirect TP(a) UGR DALI/1-10V Switch Dim.	3000K/4000K/5700K	Yes	23W/34W	2645/4080	120
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)		-	-	-	-
JC**080264**	Skytile Surface Mount Box 1200 x 300	-	-	-	-	-

Body: Steel. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skytile® Direct/Indirect
1200 x 600 TP(a) UGR

NEW

- Colour selectable, 3000K/4000K/5700K
- UGR <19 as standard
- DALI and 1-10V dimmable options available
- Emergency remote pack options available (see p.302)





IP 20 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Emergency options | Dimmable options | UGR <19 | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**080258**	Skytile Direct/Indirect TP(a) UGR	3000K/4000K/5700K	No	34W/48W	4080/5500	120/115
JC**080259**	Skytile Direct/Indirect TP(a) UGR DALI/1-10V Switch Dim.	3000K/4000K/5700K	Yes	34W/48W	4080/5500	120/115
JC**EM002**	Emergency Remote Pack (see p.302)	-	-	-	-	-
JC**EM002ST**	Emergency Remote Pack Self-Test (see p.302)	-	-	-	-	-
JC**EM002DALI**	DALI Addressable Emergency Remote Pack (see p.302)		-	-	-	-
JC**080263**	Skytile Surface Mount Box 1200 x 600	-	-	-	-	-

Body: Steel. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skytile® Direct/Indirect
Surface Mount Box

NEW

- For use with Skytile and Skytile Direct/Indirect
- 600 x 600, 1200 x 600 and 1200 x 300mm options available
- Suitable for emergency versions






Toolless fast fix system

2yr **Guarantee**

WH **White**




CODE	DESCRIPTION
JC**080262**	Skytile Surface Mount Box 600 x 600
JC**080263**	Skytile Surface Mount Box 1200 x 600
JC**080264**	Skytile Surface Mount Box 1200 x 300

Body: Aluminium.

Skytile®
Surface Mount Box

- 600 x 600, 1200 x 600 and 1200 x 300mm options available
- Standard and linear variants available
- Suitable for emergency versions
- Not for use with Skytile Direct/Indirect

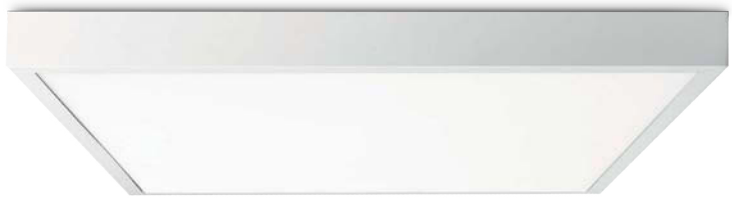




Toolless fast fix system

2yr
Guarantee

WH
White



CODE	DESCRIPTION
JC**71262**	600 x 600mm Surface mount box
JC**71295**	1200 x 600mm Surface mount box
JC**71299**	1200 x 300mm Surface mount box

Body: Aluminium.

Skytile®
Suspension Kit

- Supplied with 1.5m suspension cable
- Collar locking mechanism to adjust mounting heights
- For both ceiling and cable tray mounting



2yr
Guarantee

CODE	DESCRIPTION
JC**71311**	4 wire suspension kit 1.5m (for use with 600 x 600 panels only)
JC**71312**	6 wire suspension kit 1.5m (for use with 1200 x 300 and 1200 x 600 panels only)
JC**080050**	4 wire 1.5m Suspension Kit (for use with Skytile Base panels only)
JC**080066**	6 wire 1.5m Suspension Kit (for use with Skytile Base panels only)
SPR**0680**	Suspension Anchor Bracket (2 pieces)

Cable: Steel.

Commercial & Office

Line of Light 156

Ring of Light 178


Commercial Linear 182


Skytile® Surface 188


NEW

Line of Light

Modular linear lighting system

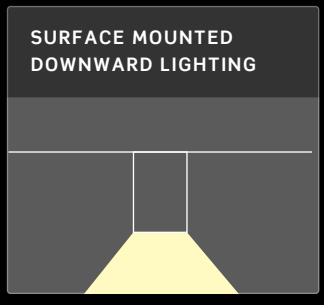

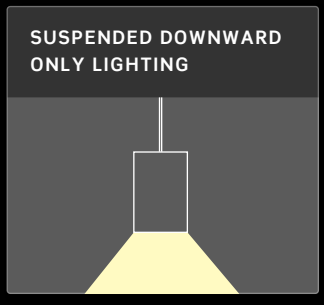

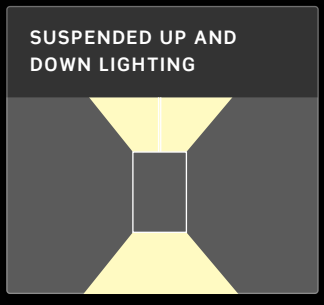



Versatile lighting solution


Line of Light is a sleek, linear luminaire range designed for continuous illumination. Corner and linear connection accessories are available, allowing you to craft long lengths, squares, and rectangular configurations. Plus, choose between direct or indirect light output. The range can be suspended or surface mounted.

Two wire suspension kit

Available in black, white or silver, and 2m or 5m lengths

Ultra secure linking brackets

Strong linking bracket for connecting lengths and corners

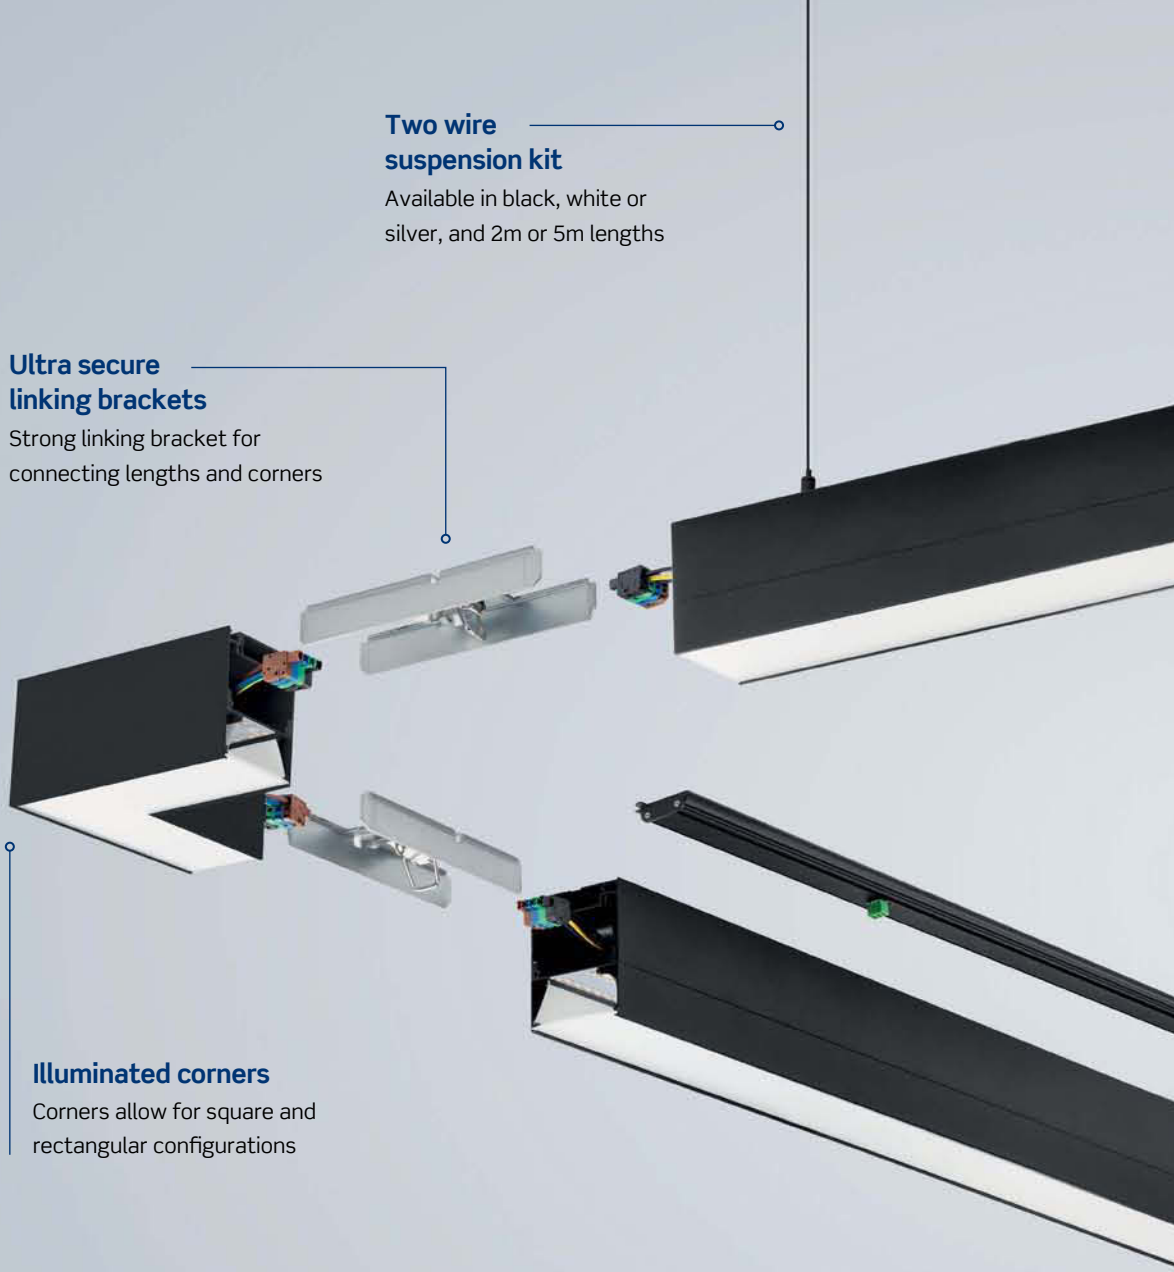


Illuminated corners

Corners allow for square and rectangular configurations

Modular design flexibility

Line of Light can be used as a single piece 4ft or 5ft length, or connected to additional units to make longer linear designs. Illuminated corners allow for seamless 'L' shape, square and rectangular designs. Pre-wired connectors inside of Line of Light are accessible by simply removing the front and connecting to additional lengths or corners with ease.

Create longer seamless runs by adding /EXT to standard Line of Light product codes to order middle/end pieces that exclude end caps and flex.

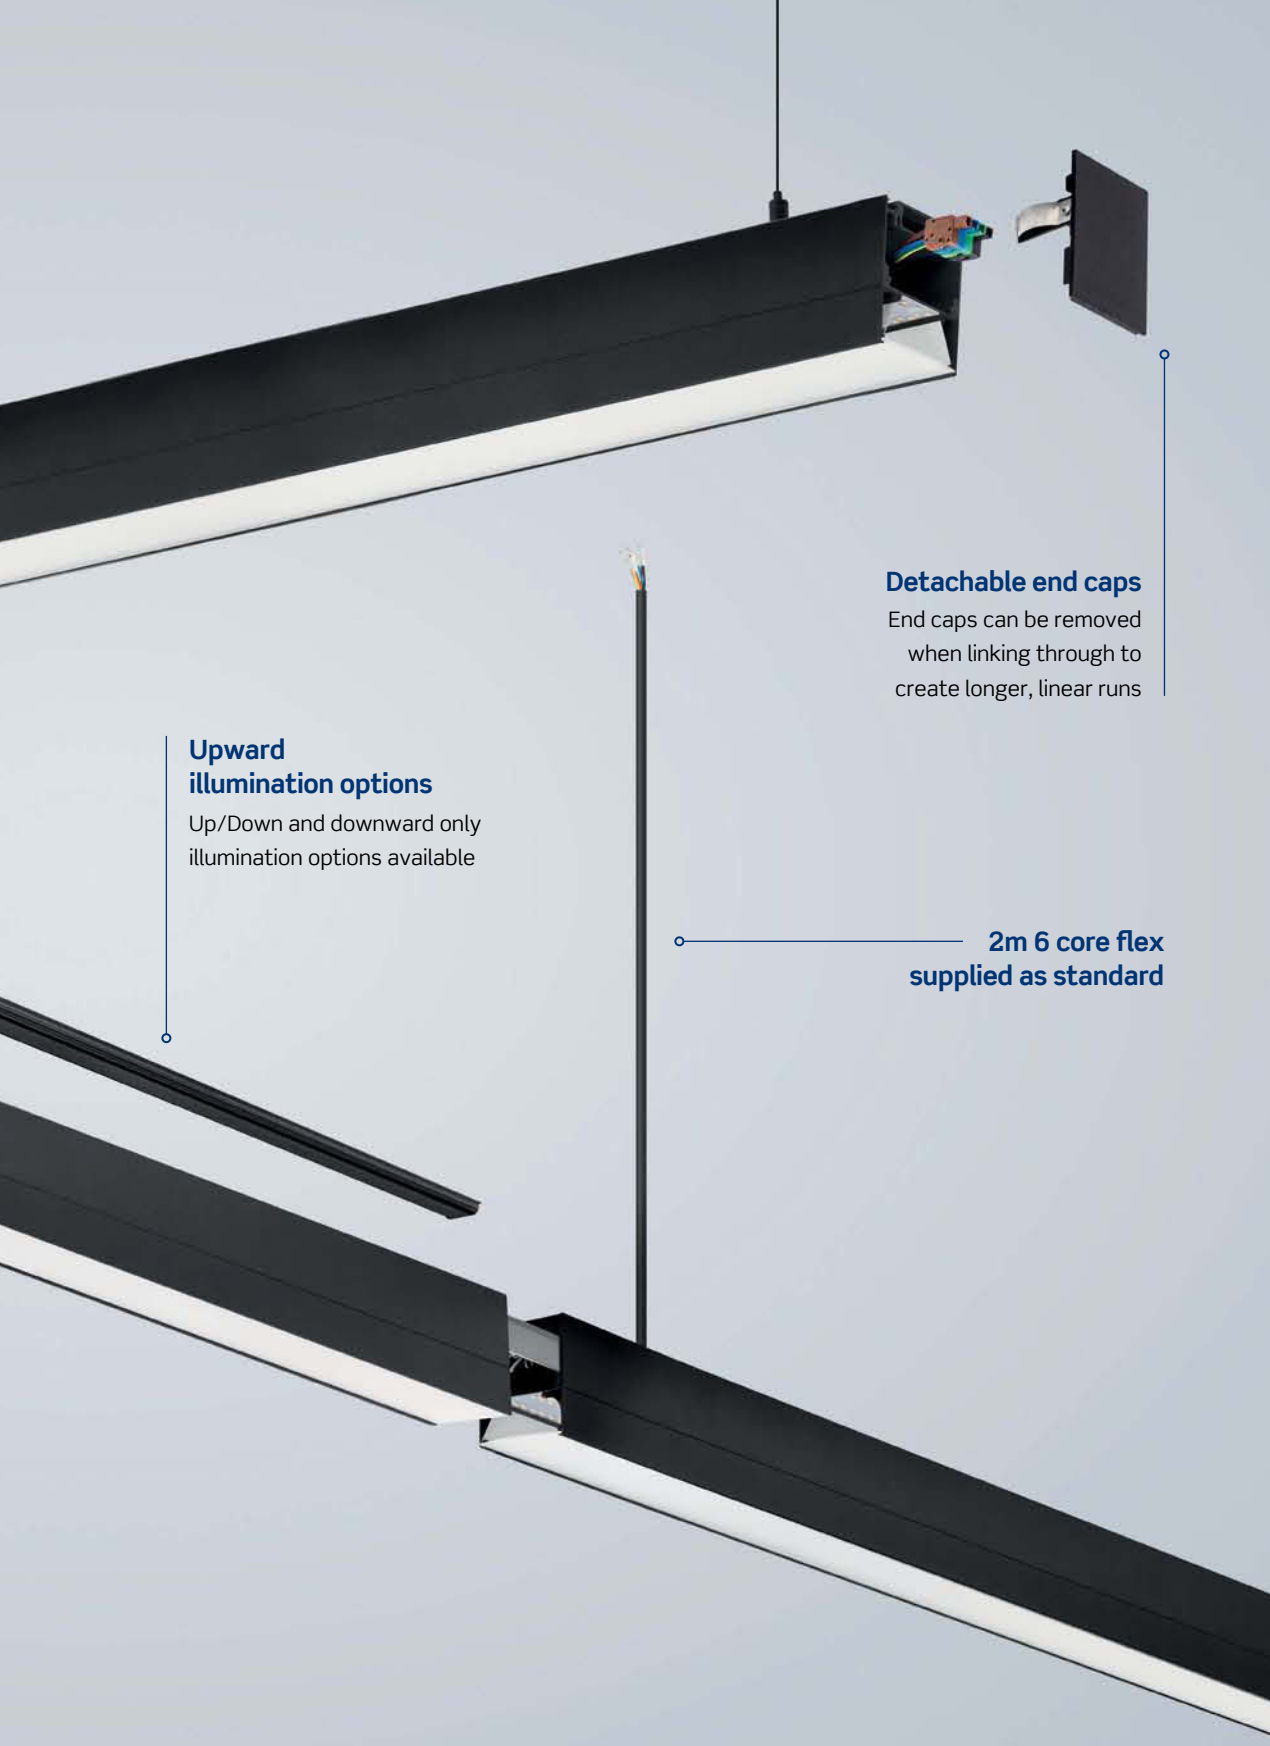

Detachable end caps
End caps can be removed when linking through to create longer, linear runs


Upward illumination options
Up/Down and downward only illumination options available

2m 6 core flex supplied as standard


Fast Serviceability

When surface mounting it is essential that internal components can be accessed for servicing and maintenance in the future. Single body units make it hard to maintain the fixture, requiring a full removal from the ceiling to access components.


Line of Light's two-part design allows for fast access to the driver, termination and other modules, making installation, and maintenance simpler. Simply remove the bottom section and access the necessary parts.

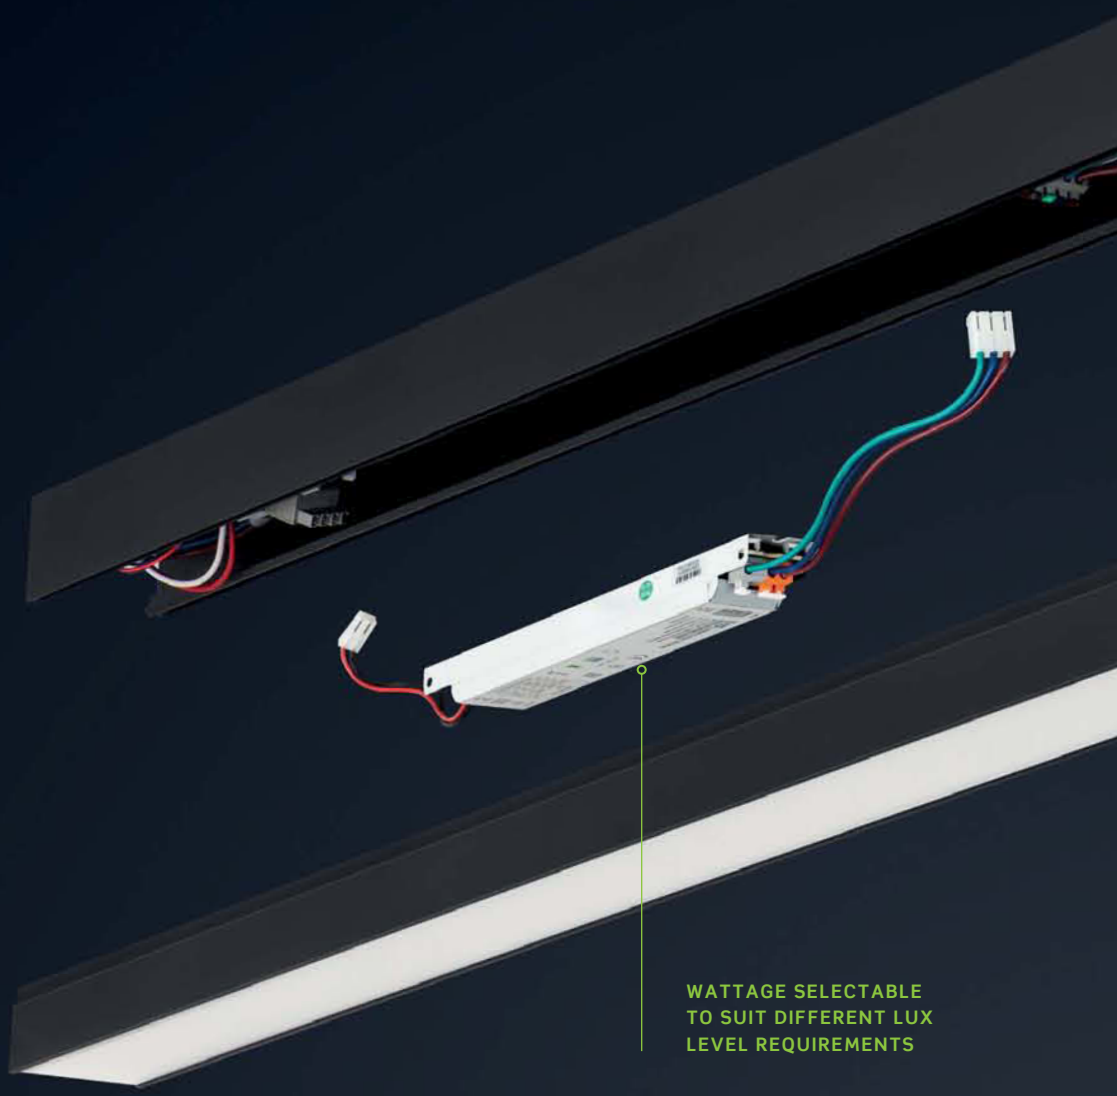

WATTAGE SELECTABLE TO SUIT DIFFERENT LUX LEVEL REQUIREMENTS

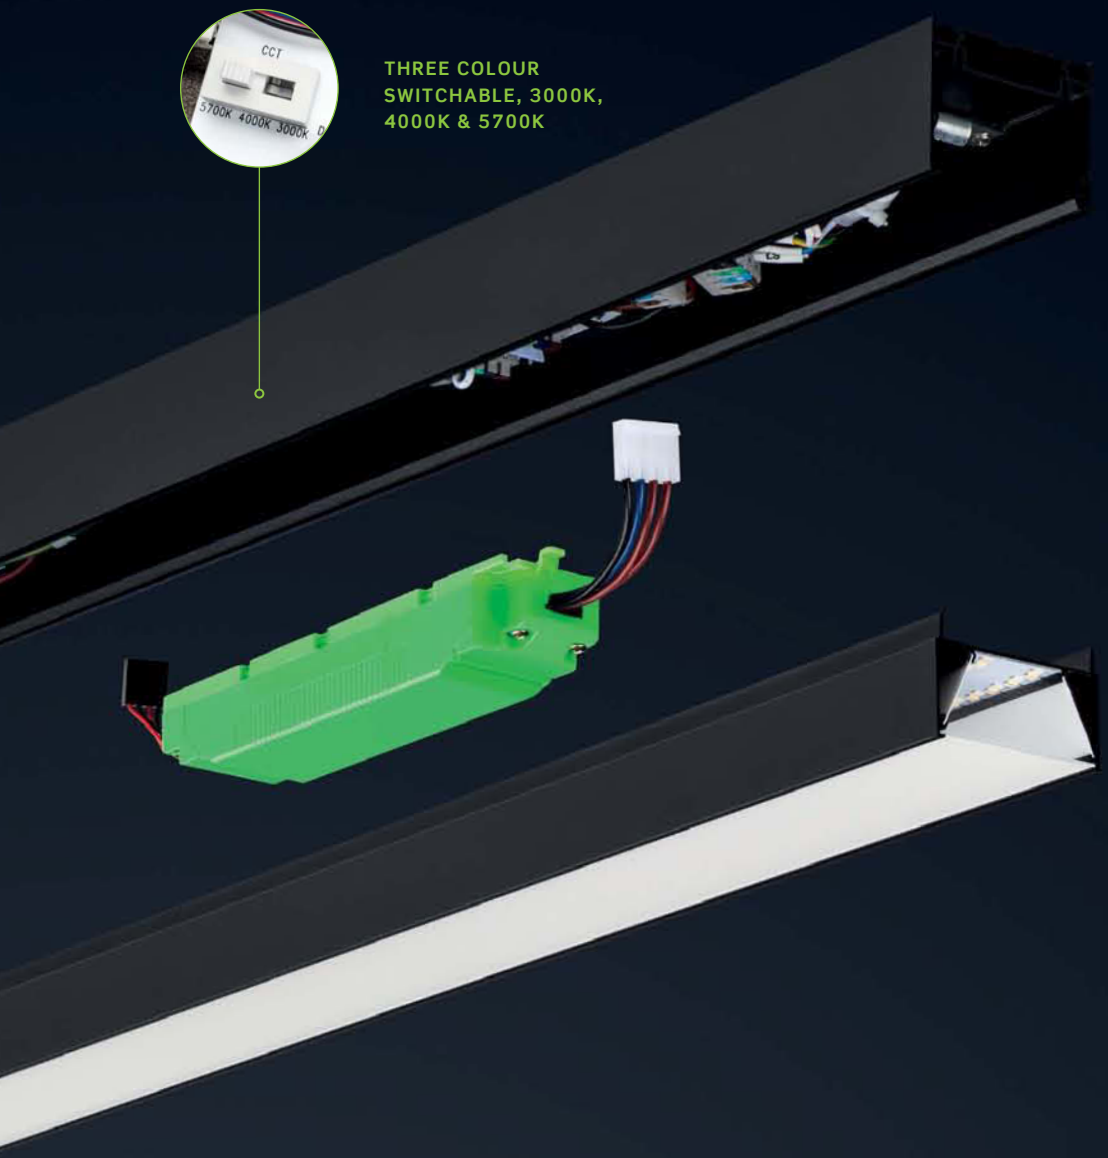


THREE COLOUR
SWITCHABLE, 3000K,
4000K & 5700K

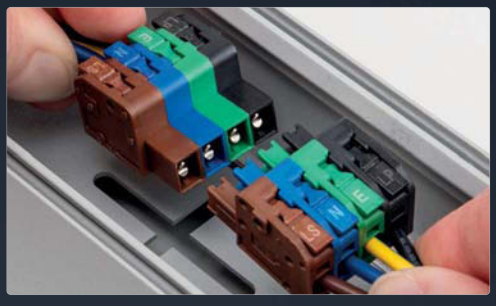

Colour coded terminals for clear cable allocation

The colour coded terminal blocks provide clear indication of cable allocation for more efficient wiring and an easy installation.

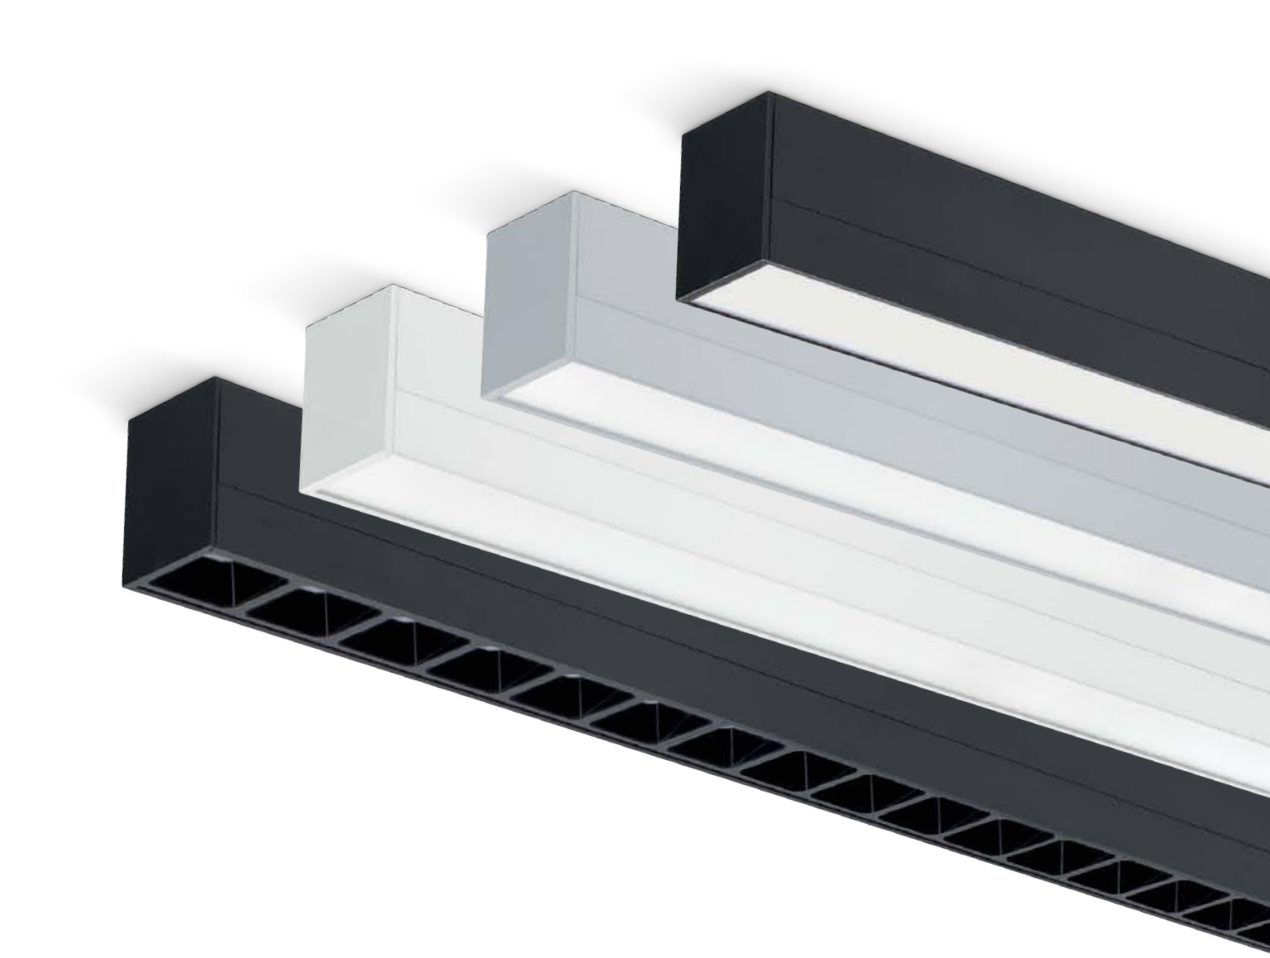

Superior light uniformity and glare management


Line of light has been developed to provide a broad range of flexible options for lighting designers. With low output, high output, wattage selectable and UGR <19 options available.

All lengths, corners and end cap accessories are available in black, silver and white finish options*.

*UGR option available in black only.


Offers greater versatility for lighting designers

The Wattage can be adjusted to suit different lux level requirements across a range of applications, whilst also maintaining low glare.

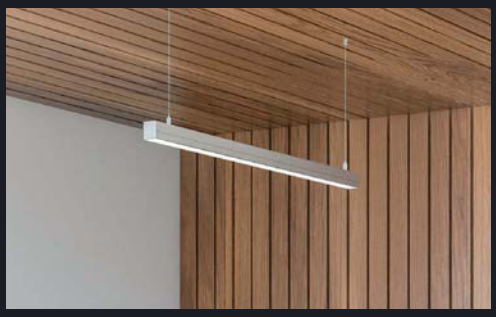


200 Lux

Breakout rooms

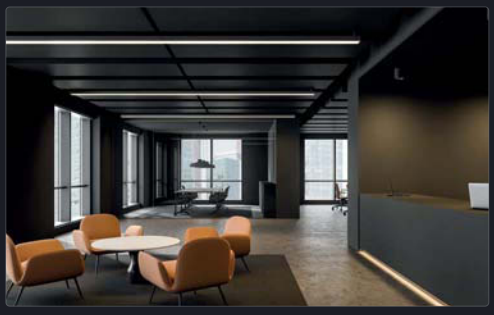

300 Lux

Reception areas

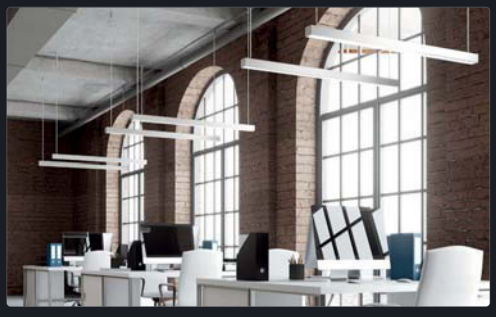

500 Lux

Offices



500+ Lux

Retail applications

Common configurations

Our Line of Light range offers customisable lighting runs using 4ft and 5ft sections, which can be mixed in a single run. Each starter kit includes end caps and 2m flex. Add seamless extensions using our internal linking kit—simply add /EXT to the product code to order.



Single length

Standard length, including end caps and 2m flex



Extension piece

Includes linking kit and excludes end caps and flex




Illuminated corner


Lit corner includes linking kit and connections




Simply take one of the end caps from the start piece and add to the end of your extended length





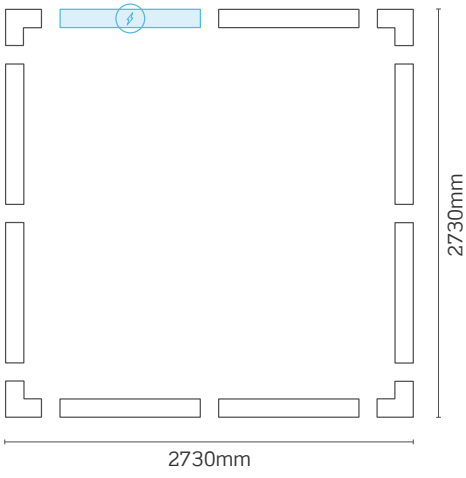

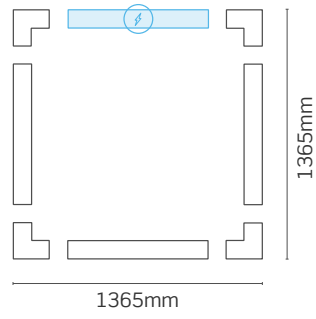



STANDARD SUPPLIED CABLE – 0.75MM²

(6A MAXIMUM LOAD)

Wattage per fitting	Max linked quantity of Line of Light
16W – 22W 4ft	40
16W – 22W 5ft	40
24W – 40W 4ft	30
30W – 50W 5ft	20


Additional notes:
Circuit breaker type/rating to be considered when choosing qty of luminaires. Installer to check cable parameters and ensure installation complies with the local current wiring regulations. Addition of Corner and/or Indirect light optic have negligible change to power ratings.

Line of Light 4ft
CCT

NEW

- Low glare rating of <19
- Two-part construction allowing easy access to termination and internal components
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Uplight module added to fitting for up and downward illumination, see p.176
- Suspension kit available, see p.175
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add **/EXT** to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex





IP 20 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 75° Beam | Emergency options | Dimmable options | BLK Black | SIL Silver | WH White

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**077001**	Direct 4ft Low Output	No	16W/18W/20W/22W	1800/2050/2400/2600
JC**077002**	Direct 4ft Low Output EM	No	16W/18W/20W/22W	1800/2050/2400/2600
JC**077003**	Direct 4ft	No	24W/32W/40W	2900/3750/4650
JC**077004**	Direct 4ft EM	No	24W/32W/40W	2900/3750/4650
JC**077005**	Direct 4ft High Output 1-10V	Yes	23W-40W**	Up to 4,650
JC**077006**	Direct 4ft High Output EM 1 – 10V	Yes	23W-40W**	Up to 4,650
JC**077008**	Direct 4ft High Output DALI/Switch Dim	Yes	23W-40W**	Up to 4,650
JC**077009**	Direct 4ft High Output EM DALI/Switch Dim EM	Yes	23W-40W**	Up to 4,650
JC**EM007**	Emergency Pack	-	-	-
SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-

COLOUR VARIATIONS

JC------**BLK**	Black	JC------**SIL**	Silver
JC------**WH**	White	JC------**EXT**	Extension

ADDITIONAL INFO

**Wattage selectable incrementally between this range.
Body & End caps: Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Line of Light 4ft
Direct/Indirect CCT

NEW

- Low glare rating of <19
- Two-part construction allowing easy access to termination and internal components
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Uplight module added to fitting for up and downward illumination, see p.176
- Suspension kit available, see p.175
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add **/EXT** to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex





IP 20 Rating | Class 1 | Colour switchable | Wattage switchable | CRI: Ra 80 | Warranty* 5yr | Beam 75° | Emergency options | Dimmable options | Black BLK | Silver SIL | White WH

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**077040**	Direct/Indirect 4ft Low Output	No	16W/18W/20W/22W	1800/2050/2400/2600
JC**077041**	Direct/Indirect 4ft Low Output EM	No	16W/18W/20W/22W	1800/2050/2400/2600
JC**077042**	Direct/Indirect 4ft	No	24W/32W/40W	2900/3750/4650
JC**077043**	Direct/Indirect 4ft EM	No	24W/32W/40W	2900/3750/4650
JC**077044**	Direct/Indirect 4ft High Output 1-10V	Yes	23W-40W**	Up to 4,650
JC**077045**	Direct/Indirect 4ft High Output EM 1 – 10V	Yes	23W-40W**	Up to 4,650
JC**077046**	Direct/Indirect 4ft High Output DALI/Switch Dim	Yes	23W-40W**	Up to 4,650
JC**077048**	Direct/Indirect 4ft High Output EM DALI/Switch Dim EM	Yes	23W-40W**	Up to 4,650
JC**EM007**	Emergency Pack	-	-	-
SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-

COLOUR VARIATIONS

JC------**BLK**	Black	JC------**SIL**	Silver
JC------**WH**	White	JC------**EXT**	Extension

ADDITIONAL INFO

**Wattage selectable incrementally between this range.
Body & End caps: Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Line of Light 4ft
UGR CCT

NEW

- Low glare rating of <16
- Two-part construction allowing easy access to termination and internal components
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Suspension kit available, see p.175
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add **/EXT** to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex





IP 20 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 70° Beam | Emergency options | Dimmable options | BLK Black

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**077080BLK**	Direct 4ft UGR Low Output	No	16W/18W/20W/22W	1800/2050/2400/2600
JC**077081BLK**	Direct 4ft UGR Low Output EM	No	16W/18W/20W/22W	1800/2050/2400/2600
JC**077082BLK**	Direct 4ft UGR	No	24W/32W/40W	2900/3750/4650
JC**077083BLK**	Direct 4ft UGR EM	No	24W/32W/40W	2900/3750/4650
JC**077084BLK**	Direct 4ft UGR High Output 1-10V	Yes	23W-40W**	Up to 4,650
JC**077085BLK**	Direct 4ft UGR High Output EM 1 – 10V	Yes	23W-40W**	Up to 4,650
JC**077086BLK**	Direct 4ft UGR High Output DALI/Switch Dim	Yes	23W-40W**	Up to 4,650
JC**077087BLK**	Direct 4ft UGR High Output EM DALI/Switch Dim EM	Yes	23W-40W**	Up to 4,650
SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-

VARIATIONS

JC------**EXT**	Extension (excludes end caps and flex)

ADDITIONAL INFO

**Wattage selectable incrementally between this range.
Emergency module and reel diffuser not available for Line of Light UGR; complete emergency only.
Body & End caps: Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Line of Light 4ft
UGR Direct/Indirect CCT

NEW

- Low glare rating of <16
- Two-part construction allowing easy access to termination and internal components
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Suspension kit available, see p.175
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add **/EXT** to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex







Rating | Class 1 | Colour switchable | Wattage switchable | CRI: Ra | Warranty* | Beam | Emergency options | Dimmable options | Black

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**077110BLK**	Direct/Indirect 4ft UGR Low Output	No	16W/18W/20W/22W	1800/2050/2400/2600
JC**077111BLK**	Direct/Indirect 4ft UGR Low Output EM	No	16W/18W/20W/22W	1800/2050/2400/2600
JC**077112BLK**	Direct/Indirect 4ft UGR	No	24W/32W/40W	2900/3750/4650
JC**077113BLK**	Direct/Indirect 4ft UGR EM	No	24W/32W/40W	2900/3750/4650
JC**077114BLK**	Direct/Indirect 4ft UGR High Output 1-10V	Yes	23W-40W**	Up to 4,650
JC**077115BLK**	Direct/Indirect 4ft UGR High Output EM 1 – 10V	Yes	23W-40W**	Up to 4,650
JC**077116BLK**	Direct/Indirect 4ft UGR High Output DALI/Switch Dim	Yes	23W-40W**	Up to 4,650
JC**077117BLK**	Direct/Indirect 4ft UGR High Output EM DALI/Switch Dim EM	Yes	23W-40W**	Up to 4,650
SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-

VARIATIONS

JC-----**EXT**	Extension (excludes end caps and flex)

ADDITIONAL INFO

**Wattage selectable incrementally between this range.
Emergency module and reel diffuser not available for Line of Light UGR; complete emergency only.
Body & End caps: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Line of Light 5ft
CCT

NEW

- Low glare rating of <19
- Two-part construction allowing easy access to termination and internal components
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Uplight module added to fitting for up and downward illumination, see p.176
- Suspension kit available, see p.175
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add **/EXT** to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex





CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**077020**	Direct 5ft Low Output	No	16W/18W/20W/22W	1800/2050/2250/2450
JC**077021**	Direct 5ft Low Output EM	No	16W/18W/20W/22W	1800/2050/2250/2450
JC**077022**	Direct 5ft	No	30W/40W/50W	3800/5000/6150
JC**077023**	Direct 5ft EM	No	30W/40W/50W	3800/5000/6150
JC**077024**	Direct 5ft High Output 1-10V	Yes	23W-50W**	Up to 5,500
JC**077025**	Direct 5ft High Output EM 1 – 10V	Yes	23W-50W**	Up to 5,500
JC**077026**	Direct 5ft High Output DALI/Switch Dim	Yes	23W-50W**	Up to 5,500
JC**077027**	Direct 5ft High Output EM DALI/Switch Dim EM	Yes	23W-50W**	Up to 5,500
JC**EM007**	Emergency Pack	-	-	-
SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-

COLOUR VARIATIONS

JC------**BLK**	Black	JC------**SIL**	Silver
JC------**WH**	White	JC------**EXT**	Extension

ADDITIONAL INFO

**Wattage selectable incrementally between this range.
Body & End caps: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Line of Light 5ft
Direct/Indirect CCT

NEW

- Low glare rating of <19
- Two-part construction allowing easy access to termination and internal components
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Uplight module added to fitting for up and downward illumination, see p.176
- Suspension kit available, see p.175
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add **/EXT** to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex



IP 20 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 75° Beam | Emergency options | Dimmable options | BLK Black | SIL Silver | WH White

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**077060**	Direct/Indirect 5ft Low Output	No	16W/18W/20W/22W	1800/2050/2250/2450
JC**077061**	Direct/Indirect 5ft Low Output EM	No	16W/18W/20W/22W	1800/2050/2250/2450
JC**077062**	Direct/Indirect 5ft	No	30W/40W/50W	3800/5000/6150
JC**077063**	Direct/Indirect 5ft EM	No	30W/40W/50W	3800/5000/6150
JC**077065**	Direct/Indirect 5ft High Output 1-10V	Yes	23W-50W**	Up to 5,500
JC**077066**	Direct/Indirect 5ft High Output EM 1 – 10V	Yes	23W-50W**	Up to 5,500
JC**077067**	Direct/Indirect 5ft High Output DALI/Switch Dim	Yes	23W-50W**	Up to 5,500
JC**077068**	Direct/Indirect 5ft High Output EM DALI/Switch Dim EM	Yes	23W-50W**	Up to 5,500
JC**EM007**	Emergency Pack	-	-	-
SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-

COLOUR VARIATIONS

JC------**BLK**	Black	JC------**SIL**	Silver
JC------**WH**	White	JC------**EXT**	Extension

ADDITIONAL INFO


**Wattage selectable incrementally between this range.
Body & End caps: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Line of Light 5ft
UGR CCT

NEW

- Low glare rating of <16
- Two-part construction allowing easy access to termination and internal components
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Suspension kit available, see p.175
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add **/EXT** to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex

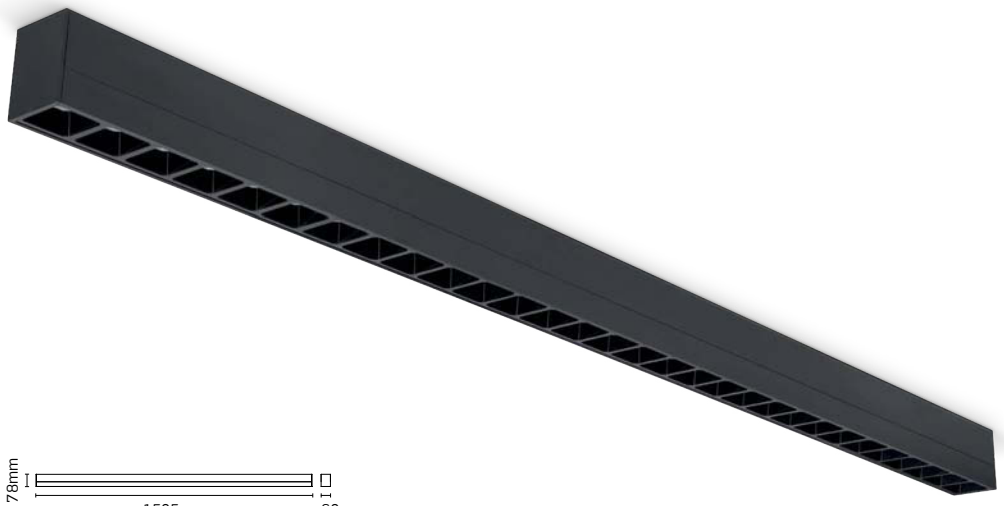



Rating | Class 1 | Colour switchable | Wattage switchable | CRI: Ra | Warranty* | Beam | Emergency options | Dimmable options | Black

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**077088BLK**	Direct 5ft UGR Low Output	No	16W/18W/20W/22W	1600/1850/2000/2200
JC**077089BLK**	Direct 5ft UGR Low Output EM	No	16W/18W/20W/22W	1600/1850/2000/2200
JC**077090BLK**	Direct 5ft UGR	No	30W/40W/50W	3450/4500/5550
JC**077091BLK**	Direct 5ft UGR EM	No	30W/40W/50W	3450/4500/5550
JC**077092BLK**	Direct 5ft UGR High Output 1-10V	Yes	23W-50W**	Up to 5,500
JC**077093BLK**	Direct 5ft UGR High Output EM 1 – 10V	Yes	23W-50W**	Up to 5,500
JC**077094BLK**	Direct 5ft UGR High Output DALI/Switch Dim	Yes	23W-50W**	Up to 5,500
JC**077095BLK**	Direct 5ft UGR High Output EM DALI/Switch Dim EM	Yes	23W-50W**	Up to 5,500
SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-

VARIATIONS

JC------**EXT**	Extension (excludes end caps and flex)

ADDITIONAL INFO


**Wattage selectable incrementally between this range.
Emergency module and reel diffuser not available for Line of Light UGR; complete emergency only.
Body & End caps: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Line of Light 5ft
UGR Direct/Indirect CCT

NEW

- Low glare rating of <16
- Two-part construction allowing easy access to termination and internal components
- Colour selectable between 3000K, 4000K & 5700K
- Illuminated corners & upward illumination options
- Suspension kit available, see p.175
- Sections and corners can be connected via a simple plug and play system
- For longer seamless runs add **/EXT** to any standard Line of Light product codes to order middle/end pieces that exclude end caps and flex

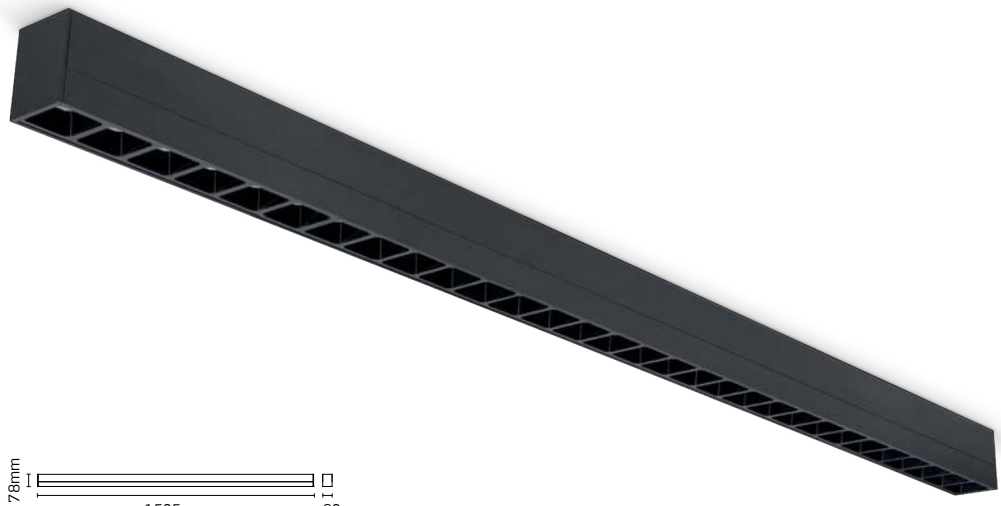



Rating | Class 1 | Colour switchable | Wattage switchable | CRI: Ra | Warranty* | Beam | Emergency options | Dimmable options | Black

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**077118BLK**	Direct/Indirect 5ft UGR Low Output	No	16W/18W/20W/22W	1600/1850/2000/2200
JC**077119BLK**	Direct/Indirect 5ft UGR Low Output EM	No	16W/18W/20W/22W	1600/1850/2000/2200
JC**077120BLK**	Direct/Indirect 5ft UGR	No	30W/40W/50W	3450/4500/5550
JC**077121BLK**	Direct/Indirect 5ft UGR EM	No	30W/40W/50W	3450/4500/5550
JC**077122BLK**	Direct/Indirect 5ft UGR High Output 1-10V	Yes	23W-50W**	Up to 5,500
JC**077123BLK**	Direct/Indirect 5ft UGR High Output EM 1 – 10V	Yes	23W-50W**	Up to 5,500
JC**077124BLK**	Direct/Indirect 5ft UGR High Output DALI/Switch Dim	Yes	23W-50W**	Up to 5,500
JC**077125BLK**	Direct/Indirect 5ft UGR High Output EM DALI/Switch Dim EM	Yes	23W-50W**	Up to 5,500
SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-

VARIATIONS

JC-----**EXT**	Extension (excludes end caps and flex)

ADDITIONAL INFO

**Wattage selectable incrementally between this range.
Emergency module and reel diffuser not available for Line of Light UGR; complete emergency only.
Body & End caps: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Line of Light
Corners

NEW

- Illuminated corners for seamless square and rectangle configurations

JC**077150WH**



Corners come complete with two linking brackets

JC**077150SIL**




JC**077150BLK**



JC**077151BLK**





IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | BLK Black | SIL Silver | WH White

CODE	DESCRIPTION	COL TEMP.
JC**077150**	Line of Light Corner	3000K/4000K/5700K
JC**077151***	Line of Light UGR Corner	3000K/4000K/5700K

COLOUR VARIATIONS

JC------**BLK**	Black	JC------**SIL**	Silver
JC------**WH**	White		

ADDITIONAL INFO

*UGR Corner available in black only.

Body & End caps: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Line of Light
Suspension Kit

NEW

JC**077153BLK**



JC**077153SIL**



JC**077153WH**



2yr Guarantee | BLK Black | SIL Silver | WH White

CODE	DESCRIPTION
JC**077153**	Line of Light Suspension Kit 2m
JC**077154**	Line of Light Suspension Kit 5m
SPR**0680**	Suspension Anchor Bracket (2 pieces)

COLOUR VARIATIONS

JC------**BLK**	Black	JC------**WH**	White	JC------**SIL**	Silver

ADDITIONAL INFO

Bracket & Suspension Cable: Steel

Line of Light
Uplight

NEW

- Plug and play uplight section to easily change direct fitting to indirect fitting



JC**077040BLK/UP**

JC**077040SIL/UP**

JC**077040WH/UP**

IP 20 Rating | 5yr Warranty* | BLK Black | SIL Silver | WH White

CODE	DESCRIPTION
JC**077040**	Line of Light 1200mm Uplight Module
JC**077060**	Line of Light 1500mm Uplight Module

COLOUR VARIATIONS

JC------**BLK/UP** Black

JC------**WH/UP** White

JC------**SIL/UP** Silver

ADDITIONAL INFO

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.



Ring of Light
600mm


NEW


- Adjustable suspension kit included, max 1500mm distance from ceiling
- Suspended ring to compliment our linear Line of Light range
- Colour selectable 3000K/4000K/5700K
- Wattage selectable 20W/30W/37W
- Emergency options available
- DALI/Switch dim options available
- Available in white or black





White finish available





WHITE	BLACK	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**077200**	JC**077205**	Ring of Light 600mm	No	20W/30W/37W	Up to 4600	124
JC**077201**	JC**077206**	Ring of Light 600mm DALI/Switch Dim.	Yes	20W/30W/37W	Up to 4600	124
JC**077202**	JC**077207**	Ring of Light 600mm Emergency	No	20W/30W/37W	Up to 4600	124
JC**077203**	JC**077208**	Ring of Light 600mm DALI/Switch Dim. EM	Yes	20W/30W/37W	Up to 4600	124
-	SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-	

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Ring of Light
900mm

NEW


- Adjustable suspension kit included, max 1500mm distance from ceiling
- Suspended ring to compliment our linear Line of Light range
- Colour selectable 3000K/4000K/5700K
- Wattage selectable 30W/40W/50W
- Emergency options available
- DALI/Switch dim options available
- Available in white or black





White finish available

IP 20 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 70° Beam | Emergency options



WHITE	BLACK	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**077210**	JC**077215**	Ring of Light 900mm	No	30W/40W/50W	Up to 6250	125
JC**077211**	JC**077216**	Ring of Light 900mm DALI/Switch Dim.	Yes	30W/40W/50W	Up to 6250	125
JC**077212**	JC**077217**	Ring of Light 900mm Emergency	No	30W/40W/50W	Up to 6250	125
JC**077213**	JC**077218**	Ring of Light 900mm DALI/Switch Dim. EM	Yes	30W/40W/50W	Up to 6250	125
-	SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-	


Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.

Ring of Light
1200mm


NEW


- Adjustable suspension kit included, max 1500mm distance from ceiling
- Suspended ring to compliment our linear Line of Light range
- Colour selectable 3000K/4000K/5700K
- Wattage selectable 48W/64W/77W
- Emergency options available
- DALI/Switch dim options available
- Available in white or black

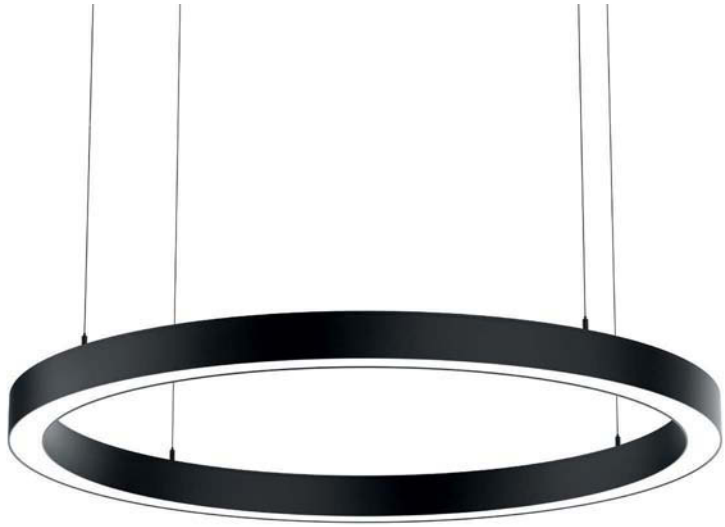



White finish available





WHITE	BLACK	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**077220**	JC**077225**	Ring of Light 1200mm	No	48W/64W/77W	Up to 9400	122
JC**077221**	JC**077226**	Ring of Light 1200mm DALI/Switch Dim.	Yes	48W/64W/77W	Up to 9400	122
JC**077222**	JC**077227**	Ring of Light 1200mm Emergency	No	48W/64W/77W	Up to 9400	122
JC**077223**	JC**077228**	Ring of Light 1200mm DALI/Switch Dim. EM	Yes	48W/64W/77W	Up to 9400	122
-	SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-	

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes batteries. Terms & Conditions apply.

Ring of Light
1500mm


NEW

- Adjustable suspension kit included, max 1500mm distance from ceiling
- Suspended ring to compliment our linear Line of Light range
- Colour selectable 3000K/4000K/5700K
- Wattage selectable 60W/80W/100W
- Emergency options available
- DALI/Switch dim options available
- Available in white or black





White finish available

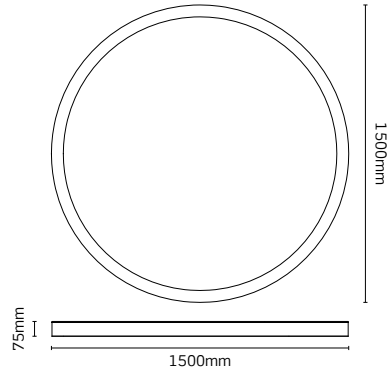

IP 20 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | 70° Beam | Emergency options

WHITE	BLACK	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**077230**	JC**077235**	Ring of Light 1500mm	No	60W/80W/100W	Up to 12000	120
JC**077231**	JC**077236**	Ring of Light 1500mm DALI/Switch Dim.	Yes	60W/80W/100W	Up to 12000	120
JC**077232**	JC**077237**	Ring of Light 1500mm Emergency	No	60W/80W/100W	Up to 12000	120
JC**077233**	JC**077238**	Ring of Light 1500mm DALI/Switch Dim. EM	Yes	60W/80W/100W	Up to 12000	120
-	SPR**0680**	Suspension Anchor Bracket (2 pieces)	-	-	-	

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes batteries. Terms & Conditions apply.



Commercial Linear

Low glare, UGR <19 compliant fitting*

FOUR WATTAGE & THREE COLOUR SELECTABLE



LOW GLARE UGR <19 COMPLIANT OPTIONS



ULTRA EFFICIENT, UP TO 156LPCW



*UGR <19 and non-UGR options available

Offers greater versatility for lighting designers

The Wattage can be adjusted to suit different lux level requirements across a range of applications, whilst also maintaining low glare.

500+ LUX
WORKSHOP AREAS

500 LUX
CLASSROOMS

300 LUX
ASSEMBLY ROOM

200 LUX
BREAKOUT ROOMS




Ultra efficient, up to 156 lpcW

With a high efficiency and bright output of up to 156 lpcW, our Commercial Linear exceeds the requirements for part L of the building regulations in commercial environments.


Commercial Linear
4ft UGR

- Four wattage selectable, 22W/25W/28W/31W
- Three colour selectable, 3000K/4000K/5700K
- UGR <19 options available
- Focussed 90° beam angle aids in reducing glare
- Efficient performance, up to 156 lpcW
- Suitable for a broad range of applications



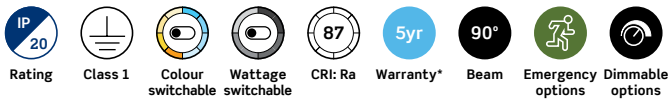

Rating | Class 1 | Colour switchable | Wattage switchable | CRI: Ra | Warranty* | Beam | Emergency options | Dimmable options



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**030031**	4ft UGR CCT	3000K/4000K/5700K	No	22W/25W/28W/31W	2860/3300/3650/4020
JC**030032**	4ft UGR CCT Self-Test Emergency	3000K/4000K/5700K	No	24W/27W/30W/33W	2860/3300/3650/4020
JC**030033**	4ft UGR CCT DALI	3000K/4000K/5700K	Yes	22W/25W/28W/31W	3270/3750/4140/4630
JC**030034**	4ft UGR CCT DALI Self-Test Emergency	3000K/4000K/5700K	Yes	24W/27W/30W/33W	3270/3750/4140/4630
JC**030037**	4ft UGR CCT Microwave On/Off	3000K/4000K/5700K	Yes	22W/25W/28W/31W	2860/3300/3650/4020
JC**030038**	4ft UGR CCT MW On/Off Self-Test EM	3000K/4000K/5700K	Yes	24W/27W/30W/33W	2860/3300/3650/4020
JC**030072**	4ft UGR	4000K	No	22W/25W/28W/31W	3270/3750/4140/4630
JC**030073**	4ft UGR Self-Test Emergency	4000K	No	24W/27W/30W/33W	3270/3750/4140/4630
JC**030071**	Commercial Linear 4 wire suspension kit	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Commercial Linear
4ft

- Four wattage selectable, 22W/25W/28W/31W
- Non-UGR version 4000K only
- Focussed 90° beam angle aids in reducing glare
- Efficient performance, up to 156 lpcW
- Suitable for a broad range of applications



IP 20 Rating | Class 1 | Wattage switchable | 87 CRI: Ra | 5yr Warranty* | 90° Beam | Emergency options | Dimmable options



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**030051**	4ft	4000K	No	22W/25W/28W/31W	3270/3750/4140/4630
JC**030052**	4ft Self-Test Emergency	4000K	No	24W/27W/30W/33W	3270/3750/4140/4630
JC**030053**	4ft DALI	4000K	Yes	22W/25W/28W/31W	2860/3300/3650/4020
JC**030054**	4ft DALI Self-Test Emergency	4000K	Yes	24W/27W/30W/33W	2860/3300/3650/4020
JC**030057**	4ft Microwave On/Off	4000K	Yes	22W/25W/28W/31W	3270/3750/4140/4630
JC**030058**	4ft MW On/Off Self-Test Emergency	4000K	Yes	24W/27W/30W/33W	3270/3750/4140/4630
JC**030071**	Commercial Linear 4 wire suspension kit	-	-	-	-


Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Commercial Linear
5ft UGR

- Four wattage selectable, 30W/32W/34W/36W
- Three colour selectable, 3000K/4000K/5700K
- UGR <19 options available
- Focussed 90° beam angle aids in reducing glare
- Efficient performance, up to 156 lpcW
- Suitable for a broad range of applications



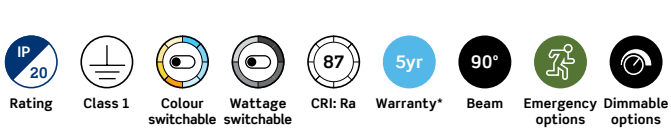



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**030041**	5ft UGR CCT	3000K/4000K/5700K	No	30W/32W/34W/36W	4030/4350/4690/4980
JC**030042**	5ft UGR CCT Self-Test Emergency	3000K/4000K/5700K	No	32W/34W/36W/38W	4030/4350/4690/4980
JC**030043**	5ft UGR CCT DALI	3000K/4000K/5700K	Yes	30W/32W/34W/36W	4550/4870/5200/5260
JC**030044**	5ft UGR CCT DALI Self-Test Emergency	3000K/4000K/5700K	Yes	32W/34W/36W/38W	4550/4870/5200/5260
JC**030047**	5ft UGR CCT Microwave On/Off	3000K/4000K/5700K	Yes	30W/32W/34W/36W	4030/4350/4690/4980
JC**030048**	5ft UGR CCT MW On/Off Self-Test EM	3000K/4000K/5700K	Yes	32W/34W/36W/38W	4030/4350/4690/4980
JC**030074**	5ft UGR	4000K	No	30W/32W/34W/36W	4550/4870/5200/5260
JC**030075**	5ft UGR Self-Test Emergency	4000K	No	32W/34W/36W/38W	4550/4870/5200/5260
JC**030071**	Commercial Linear 4 wire suspension kit	-	-	-	-


Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Commercial Linear
5ft

- Four wattage selectable, 30W/32W/34W/36W
- Non-UGR version 4000K only
- Focussed 90° beam angle aids in reducing glare
- Efficient performance, up to 156 lpcW
- Suitable for a broad range of applications







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**030061**	5ft	4000K	No	30W/32W/34W/36W	4550/4870/5200/5260
JC**030062**	5ft Self-Test Emergency	4000K	No	32W/34W/36W/38W	4550/4870/5200/5260
JC**030063**	5ft DALI	4000K	Yes	30W/32W/34W/36W	4030/4350/4690/4980
JC**030064**	5ft DALI Self-Test Emergency	4000K	Yes	32W/34W/36W/38W	4030/4350/4690/4980
JC**030067**	5ft Microwave On/Off	4000K	Yes	30W/32W/34W/36W	4550/4870/5200/5260
JC**030068**	5ft MW On/Off Self-Test Emergency	4000K	Yes	32W/34W/36W/38W	4550/4870/5200/5260
JC**030071**	Commercial Linear 4 wire suspension kit	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Skytile® Surface

Slide and lock design for easy installation

UPGRADED EFFICIENCY, NOW 107LPCW



HINGED LED PANEL FOR FAST INSTALLATION



MICROWAVE, DIMMABLE & EMERGENCY OPTIONS



Hinged LED tray for fast installation

Once the base is mounted to the ceiling, simply slide the panel in, terminate your connections and push the panel back into the base. The LED panel is secured from both sides with secure locking clips.





Secure locking caps


Slide the secure locking caps from both sides of the fitting to release the inner LED panel. Once unlocked, the hinged pivot mechanism allows the panel to be carefully manoeuvred with ease for a faster, simpler installation.

Skytile® Surface
4ft

- Conduit entry points at both ends
- DALI, 1-10V and DSI dimmable options available
- Rear BESA plate mounting option



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | Dimmable options | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72305**	Skytile Surface	4000K	No	40W	4200	105
JC**72305EM**	Skytile Surface emergency	4000K	No	40W	4200	105
JC**72305DALI**	Skytile Surface DALI	4000K	Yes	40W	4200	105
JC**72305EMDALI**	Skytile Surface DALI emergency	4000K	Yes	40W	4200	105
JC**72305DSI**	Skytile Surface DSI	4000K	Yes	40W	4200	105
JC**72305EMDSI**	Skytile Surface DSI emergency	4000K	Yes	40W	4200	105
JC**72305/1-10V**	Skytile Surface 1-10V	4000K	Yes	40W	4200	105
JC**72305EM/1-10V**	Skytile Surface 1-10V emergency	4000K	Yes	40W	4200	105
JC**72301**	Skytile Surface	4700K	No	40W	4200	105
JC**72301EM**	Skytile Surface emergency	4700K	No	40W	4200	105
JC**72301DALI**	Skytile Surface DALI	4700K	Yes	40W	4200	105
JC**72301EMDALI**	Skytile Surface DALI emergency	4700K	Yes	40W	4200	105
JC**72301DSI**	Skytile Surface DSI	4700K	Yes	40W	4200	105
JC**72301EMDSI**	Skytile Surface DSI emergency	4700K	Yes	40W	4200	105
JC**72301/1-10V**	Skytile Surface 1-10V	4700K	Yes	40W	4200	105
JC**72301EM/1-10V**	Skytile Surface 1-10V emergency	4700K	Yes	40W	4200	105
JC**73301**	Skytile Surface	5700K	No	40W	4200	105
JC**73301EM**	Skytile Surface emergency	5700K	No	40W	4200	105
JC**73301DALI**	Skytile Surface DALI	5700K	Yes	40W	4200	105
JC**73301EMDALI**	Skytile Surface DALI emergency	5700K	Yes	40W	4200	105
JC**73301DSI**	Skytile Surface DSI	5700K	Yes	40W	4200	105
JC**73301EMDSI**	Skytile Surface DSI emergency	5700K	Yes	40W	4200	105
JC**73301/1-10V**	Skytile Surface 1-10V	5700K	Yes	40W	4200	105
JC**73301EM/1-10V**	Skytile Surface 1-10V emergency	5700K	Yes	40W	4200	105
JC**72308**	Skytile Surface 4 Wire Suspension Kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Skytile® Surface
4ft Microwave Sense

- Conduit entry points available
- Rear BESA plate mounting option
- Microwave dimming with corridor function



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | Sensing | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72305MW**	Skytile Surface microwave on/off	4000K	No	40W	4200	105
JC**72305EMMW**	Skytile Surface microwave on/off emergency	4000K	No	40W	4200	105
JC**72305SD**	Skytile Surface microwave step dim	4000K	-	40W	4200	105
JC**72305EMSD**	Skytile Surface microwave step dim emergency	4000K	-	40W	4200	105
JC**72301MW**	Skytile Surface microwave on/off	4700K	No	40W	4200	105
JC**72301EMMW**	Skytile Surface microwave on/off emergency	4700K	No	40W	4200	105
JC**72301SD**	Skytile Surface microwave step dim	4700K	-	40W	4200	105
JC**72301EMSD**	Skytile Surface microwave step dim emergency	4700K	-	40W	4200	105
JC**73301MW**	Skytile Surface microwave on/off	5700K	No	40W	4200	105
JC**73301EMMW**	Skytile Surface microwave on/off emergency	5700K	No	40W	4200	105
JC**73301SD**	Skytile Surface microwave step dim	5700K	-	40W	4200	105
JC**73301EMSD**	Skytile Surface microwave step dim emergency	5700K	-	40W	4200	105
JC**72308**	Skytile Surface 4 Wire Suspension Kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Skytile® Surface
5ft

- Conduit entry points at both ends
- DALI, 1-10V and DSI dimmable options available
- Rear BESA plate mounting option



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | Dimmable options | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72306**	Skytile Surface	4000K	No	50W	5100	102
JC**72306EM**	Skytile Surface emergency	4000K	No	50W	5100	102
JC**72306DALI**	Skytile Surface DALI	4000K	Yes	50W	5100	102
JC**72306EMDALI**	Skytile Surface DALI emergency	4000K	Yes	50W	5100	102
JC**72306DSI**	Skytile Surface DSI	4000K	Yes	50W	5100	102
JC**72306EMDSI**	Skytile Surface DSI emergency	4000K	Yes	50W	5100	102
JC**72306/1-10V**	Skytile Surface 1-10V	4000K	Yes	50W	5100	102
JC**72306EM/1-10V**	Skytile Surface 1-10V emergency	4000K	Yes	50W	5100	102
JC**72302**	Skytile Surface	4700K	No	50W	5100	102
JC**72302EM**	Skytile Surface emergency	4700K	No	50W	5100	102
JC**72302DALI**	Skytile Surface DALI	4700K	Yes	50W	5100	102
JC**72302EMDALI**	Skytile Surface DALI emergency	4700K	Yes	50W	5100	102
JC**72302DSI**	Skytile Surface DSI	4700K	Yes	50W	5100	102
JC**72302EMDSI**	Skytile Surface DSI emergency	4700K	Yes	50W	5100	102
JC**72302/1-10V**	Skytile Surface 1-10V	4700K	Yes	50W	5100	102
JC**72302EM/1-10V**	Skytile Surface 1-10V emergency	4700K	Yes	50W	5100	102
JC**73302**	Skytile Surface	5700K	No	50W	5100	102
JC**73302EM**	Skytile Surface emergency	5700K	No	50W	5100	102
JC**73302DALI**	Skytile Surface DALI	5700K	Yes	50W	5100	102
JC**73302EMDALI**	Skytile Surface DALI emergency	5700K	Yes	50W	5100	102
JC**73302DSI**	Skytile Surface DSI	5700K	Yes	50W	5100	102
JC**73302EMDSI**	Skytile Surface DSI emergency	5700K	Yes	50W	5100	102
JC**73302/1-10V**	Skytile Surface 1-10V	5700K	Yes	50W	5100	102
JC**73302EM/1-10V**	Skytile Surface 1-10V emergency	5700K	Yes	50W	5100	102
JC**72308**	Skytile Surface 4 Wire Suspension Kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Skytile® Surface
5ft Microwave Sense

- Conduit entry points available
- Rear BESA plate mounting option
- Microwave dimming with corridor function



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | Sensing | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72306MW**	Skytile Surface microwave on/off	4000K	No	50W	5100	102
JC**72306EMMW**	Skytile Surface microwave on/off emergency	4000K	No	50W	5100	102
JC**72306SD**	Skytile Surface microwave step dim	4000K	-	50W	5100	102
JC**72306EMSD**	Skytile Surface microwave step dim emergency	4000K	-	50W	5100	102
JC**72302MW**	Skytile Surface microwave on/off	4700K	No	50W	5100	102
JC**72302EMMW**	Skytile Surface microwave on/off emergency	4700K	No	50W	5100	102
JC**72302SD**	Skytile Surface microwave step dim	4700K	-	50W	5100	102
JC**72302EMSD**	Skytile Surface microwave step dim emergency	4700K	-	50W	5100	102
JC**73302MW**	Skytile Surface microwave on/off	5700K	No	50W	5100	102
JC**73302EMMW**	Skytile Surface microwave on/off emergency	5700K	No	50W	5100	102
JC**73302SD**	Skytile Surface microwave step dim	5700K	-	50W	5100	102
JC**73302EMSD**	Skytile Surface microwave step dim emergency	5700K	-	50W	5100	102
JC**72308**	Skytile Surface 4 Wire Suspension Kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Skytile® Surface
5ft High Output

- Conduit entry points at both ends
- DALI, 1-10V and DSI dimmable options available
- Rear BESA plate mounting option



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | Dimmable options | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72307**	Skytile Surface	4000K	No	65W	6400	98
JC**72307EM**	Skytile Surface emergency	4000K	No	65W	6400	98
JC**72307DALI**	Skytile Surface DALI	4000K	Yes	65W	6400	98
JC**72307EMDALI**	Skytile Surface DALI emergency	4000K	Yes	65W	6400	98
JC**72307DSI**	Skytile Surface DSI	4000K	Yes	65W	6400	98
JC**72307EMDSI**	Skytile Surface DSI emergency	4000K	Yes	65W	6400	98
JC**72307/1-10V**	Skytile Surface 1-10V	4000K	Yes	65W	6400	98
JC**72307EM/1-10V**	Skytile Surface 1-10V emergency	4000K	Yes	65W	6400	98
JC**72303**	Skytile Surface	4700K	No	65W	6400	98
JC**72303EM**	Skytile Surface emergency	4700K	No	65W	6400	98
JC**72303DALI**	Skytile Surface DALI	4700K	Yes	65W	6400	98
JC**72303EMDALI**	Skytile Surface DALI emergency	4700K	Yes	65W	6400	98
JC**72303DSI**	Skytile Surface DSI	4700K	Yes	65W	6400	98
JC**72303EMDSI**	Skytile Surface DSI emergency	4700K	Yes	65W	6400	98
JC**72303/1-10V**	Skytile Surface 1-10V	4700K	Yes	65W	6400	98
JC**72303EM/1-10V**	Skytile Surface 1-10V emergency	4700K	Yes	65W	6400	98
JC**73303**	Skytile Surface	5700K	No	65W	6400	98
JC**73303EM**	Skytile Surface emergency	5700K	No	65W	6400	98
JC**73303DALI**	Skytile Surface DALI	5700K	Yes	65W	6400	98
JC**73303EMDALI**	Skytile Surface DALI emergency	5700K	Yes	65W	6400	98
JC**73303DSI**	Skytile Surface DSI	5700K	Yes	65W	6400	98
JC**73303EMDSI**	Skytile Surface DSI emergency	5700K	Yes	65W	6400	98
JC**73303/1-10V**	Skytile Surface 1-10V	5700K	Yes	65W	6400	98
JC**73303EM/1-10V**	Skytile Surface 1-10V emergency	5700K	Yes	65W	6400	98
JC**72308**	Skytile Surface 4 Wire Suspension Kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Skytile® Surface
5ft High Output MW Sense

- Conduit entry points available
- Rear BESA plate mounting option
- Microwave dimming with corridor function



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | Sensing | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72307MW**	Skytile Surface microwave on/off	4000K	No	65W	6400	98
JC**72307EMMW**	Skytile Surface microwave on/off emergency	4000K	No	65W	6400	98
JC**72307SD**	Skytile Surface microwave step dim	4000K	-	65W	6400	98
JC**72307EMSD**	Skytile Surface microwave step dim emergency	4000K	-	65W	6400	98
JC**72303MW**	Skytile Surface microwave on/off	4700K	No	65W	6400	98
JC**72303EMMW**	Skytile Surface microwave on/off emergency	4700K	No	65W	6400	98
JC**72303SD**	Skytile Surface microwave step dim	4700K	-	65W	6400	98
JC**72303EMSD**	Skytile Surface microwave step dim emergency	4700K	-	65W	6400	98
JC**73303MW**	Skytile Surface microwave on/off	5700K	No	65W	6400	98
JC**73303EMMW**	Skytile Surface microwave on/off emergency	5700K	No	65W	6400	98
JC**73303SD**	Skytile Surface microwave step dim	5700K	-	65W	6400	98
JC**73303EMSD**	Skytile Surface microwave step dim emergency	5700K	-	65W	6400	98
JC**72308**	Skytile Surface 4 Wire Suspension Kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Skytile® Surface
6ft

- Conduit entry points at both ends
- Rear BESA plate mounting option



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | Dimmable options | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72304**	Skytile Surface	4700K	No	80W	7300	91
JC**72304EM**	Skytile Surface emergency	4700K	No	80W	7300	91
JC**73304**	Skytile Surface	5700K	No	80W	7300	91
JC**73304EM**	Skytile Surface emergency	5700K	No	80W	7300	91
JC**72308**	Skytile Surface 4 Wire Suspension Kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Skytile® Surface
6ft MW Sense

- Conduit entry points available
- Rear BESA plate mounting option
- Microwave on/off



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Emergency options | Sensing | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72304MW**	Skytile Surface microwave on/off	4700K	No	80W	7300	91
JC**72304EMMW**	Skytile Surface microwave on/off emergency	4700K	No	80W	7300	91
JC**73304MW**	Skytile Surface microwave on/off	5700K	No	80W	7300	91
JC**73304EMMW**	Skytile Surface microwave on/off emergency	5700K	No	80W	7300	91
JC**72308**	Skytile Surface 4 Wire Suspension Kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Battens & Weatherproofs

Skypack™ Pro 202

ToughLED™ Pro 220

Modular Emergency & Microwave Sensor Packs 246

NEW
VARIANTS

Skypack™ Pro and ToughLED™ Pro


NEW CCT and wattage selectable variants

Following the success of ToughLED™ Pro, launched in 2022, our new Skypack™ Pro has been designed to accommodate the features that have proven to be beneficial, improving installation and flexibility for contractors.

Most notably, the modular design of ToughLED™ Pro has been designed into Skypack™ Pro, meaning that emergency and microwave modules are cross range compatible, providing a consistent user experience.



Detachable 4 way terminal block with multiple positions

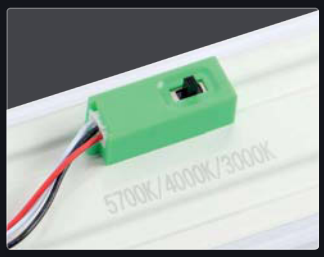

CCT and wattage selectable variants now available



Pre-moulded 2 way secure cable restraints



Suitable for BESA mounting with multiple conduit entry



Modular emergency and microwave sensor packs



Both ranges available in 4ft, 5ft and 6ft

Cross range compatible modules

ToughLED™ Pro and Skypack™ Pro have been designed to accommodate the exact same emergency and microwave sensor modules, providing a consistent user experience.

Modular Sensor Packs


Microwave on/off and
microwave step dim options

See p.251

Modular Emergency Packs

Standard and self-test versions

See p.250

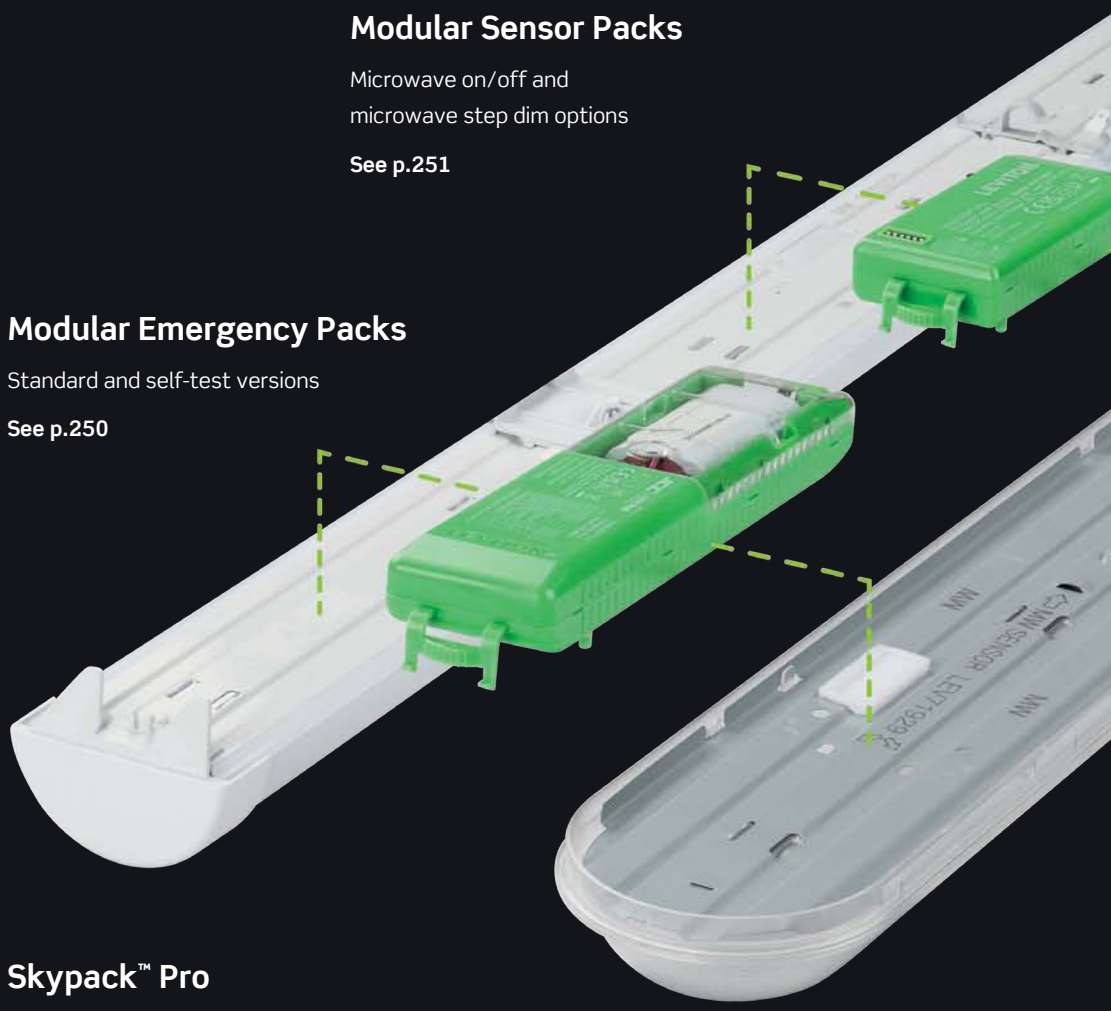

Skypack™ Pro

Quick release LED Batten

See p.212

ToughLED™ Pro

Weatherproof LED Batten

See p.232


NEW
VARIANTS



Skypack™ Pro

NEW CCT and wattage selectable variants

UPGRADED QUICK RELEASE MECHANISM



DETACHABLE 4-WAY TERMINAL BLOCK**



COLOUR AND WATTAGE SELECTABLE VARIANTS



**Patent pending | UK Registered Design No. 6336302

Continuing a proven formula

Following the success of ToughLED™ Pro, our new Skypack™ Pro has been designed to accommodate the key aspects that electricians resonated with, improving installation and flexibility for contractors.




Cross range compatible modules

Skypack™ Pro has been designed to accommodate the exact same emergency and microwave sensor modules as ToughLED™ Pro, providing a consistent user experience.

Upgraded quick release button mechanism

Quick release buttons have been redesigned to ensure the diffuser releases from the fitting with ease. The dual button mechanism releases the LED tray for easy access to mounting points and wiring connections. The internal funnel guide makes a fast and secure connection to the base when attaching the diffuser.

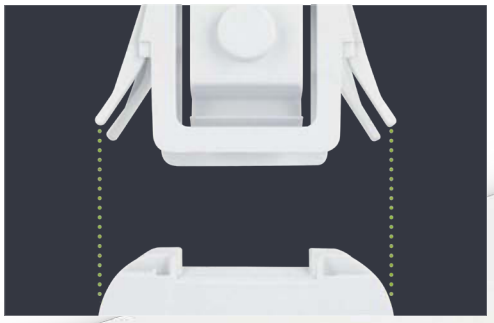



Secure end caps with self-guiding diffuser attachment

Skypack™ Pro's diffuser is easily attached using the internal assisted funnel guides, ensuring the diffuser slides in and connects securely.



Assisted attachment design ensures a secure connection

When released, the end caps hold the weight of the fitting until you need to finally detach the diffuser, and provide a tangible feeling of security when reattaching to the base.

Four, detachable easy-click terminal block positions**

Four easy-click terminal block mounting positions simplify installation. Installers can also rotate the terminal block 180° to fit any cable entry point.

Full install without leaving your ladder


Long light fittings often provide challenges during installation due to componentry being out of reach. Skypack™ Pro has been designed to ensure all aspects can be managed by one person from the top of a ladder.





KEYHOLE BESA MOUNTING GUIDES

Mounting and alignment made simple, keyhole BESA mounting design negates the need to remove screws.

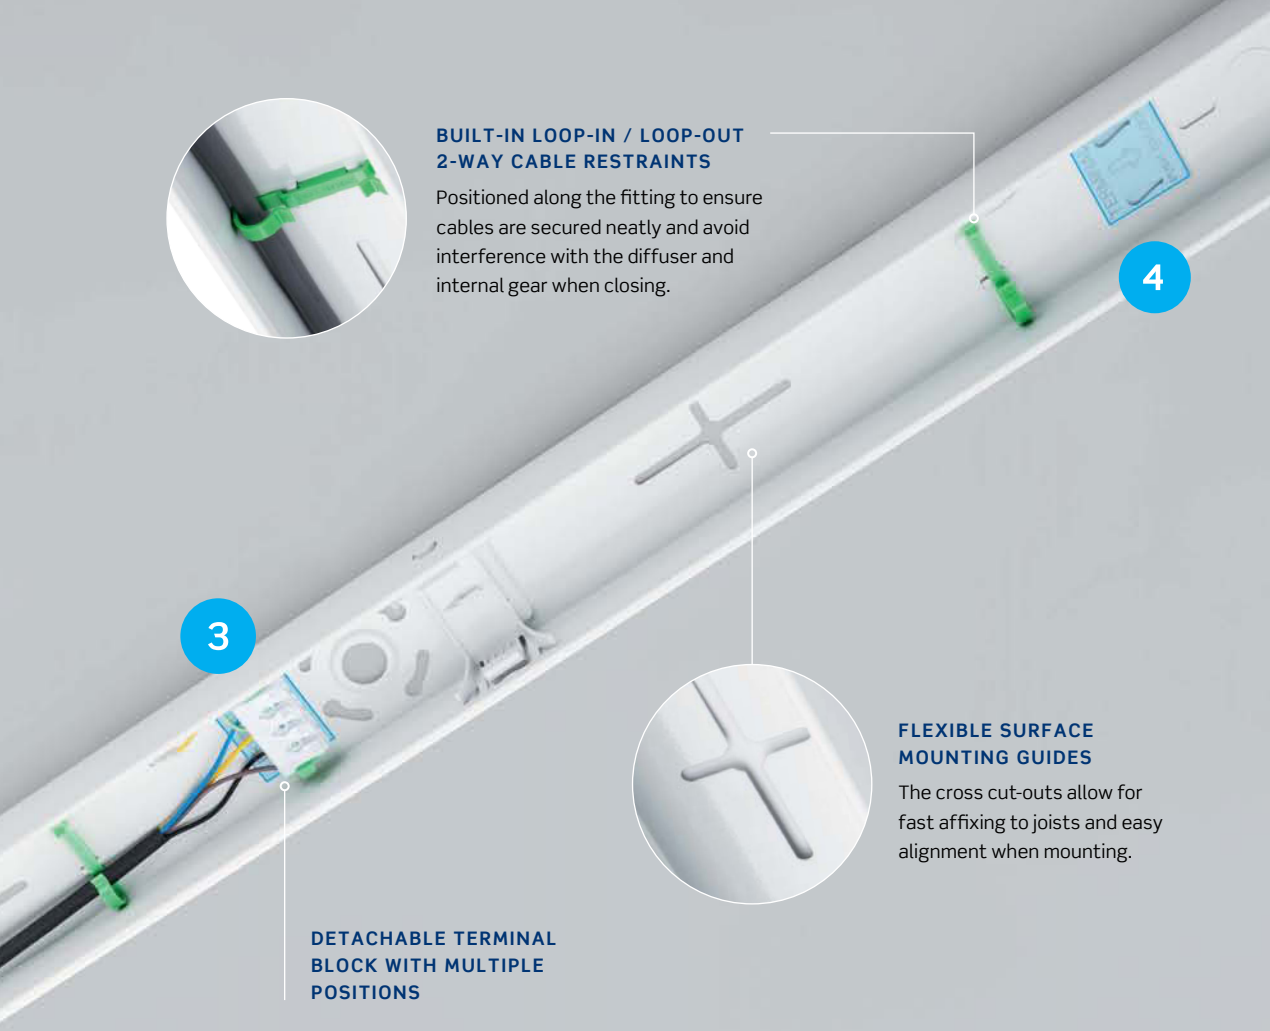

BUILT-IN LOOP-IN / LOOP-OUT 2-WAY CABLE RESTRAINTS

Positioned along the fitting to ensure cables are secured neatly and avoid interference with the diffuser and internal gear when closing.

4

3

FLEXIBLE SURFACE MOUNTING GUIDES


The cross cut-outs allow for fast affixing to joists and easy alignment when mounting.

DETACHABLE TERMINAL BLOCK WITH MULTIPLE POSITIONS



Tool-less quick release terminal block to ease installation

The terminal block can be released quickly and without the need for any tools. It can be rotated 180° to meet any cable entry point.

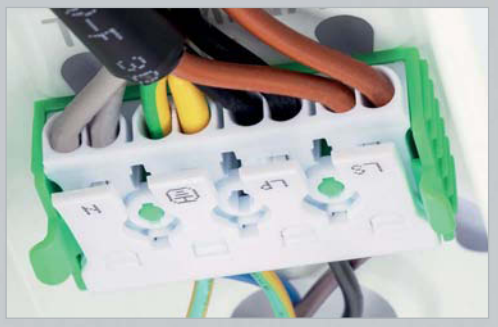


4pin terminal block with emergency provision

Allows for loop through wiring of 4 core cable, providing a dedicated terminal for the permanent live when wiring a circuit consisting of emergency and non-emergency.

**Patent pending | UK Registered Design No. 6175833. Two terminal positions on shorter 4ft lengths.

Keyhole BESA mounting points for fast mounting

Keyhole slots designed into the Skypack™ Pro base mean you don't have to remove BESA box screws, simply align the loosened screws and tighten to the base for a fast installation.

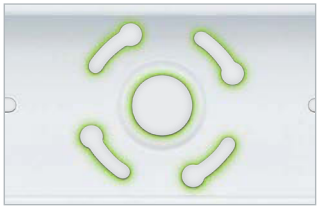

ALIGN LOOSENED SCREWS WITH BESA KEYHOLE SLOTS



TWIST PRODUCT OR BESA BOX TO THE REQUIRED ALIGNMENT




TIGHTEN THE SCREWS TO THE SKYPACK PRO BASE

Flexible surface mounting points

Designed to ensure mounting and alignment is made simple. The cross cut-outs allow for fast affixing to joists and easy alignment, whilst the keyhole BESA mounting design negates the need to remove screws.



SUITABLE FOR BESA MOUNTING, NO NEED TO REMOVE BESA BOX SCREWS

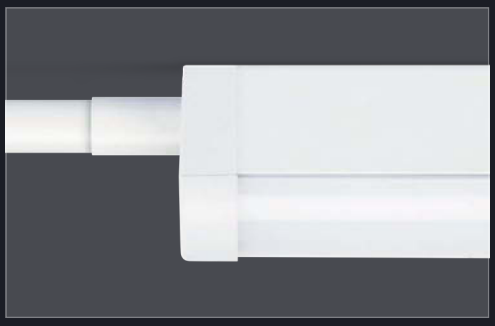


CONDUIT ENTRY POINTS ANGLED TO ENSURE THE CONDUIT DOESN'T BEND

Strong flat base

The base sits flat to the surface to avoid twisting during mounting. An inset has been designed into the base to accommodate protective cable glands.



TRADITIONAL BATTENS DON'T SIT FLUSH TO THE CEILING, CAUSING DAMAGE & TWISTING

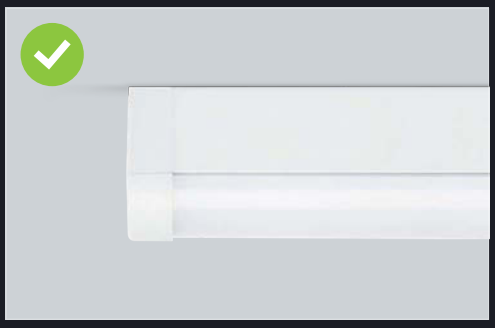


SKYPACK PRO BASE SITS FLUSH TO THE CEILING TO PREVENT TWISTING


SIMPLE PLUG-AND-PLAY
CONNECTION
JCEM003
EMERGENCY PACK
MODULE
STANDARD TERMINAL
PRE-WIRED WITH
PERMANENT LIVE

Modular accessories to suit all applications

Combine emergency and microwave sensor modules in any combination to create the desired products for the installation.

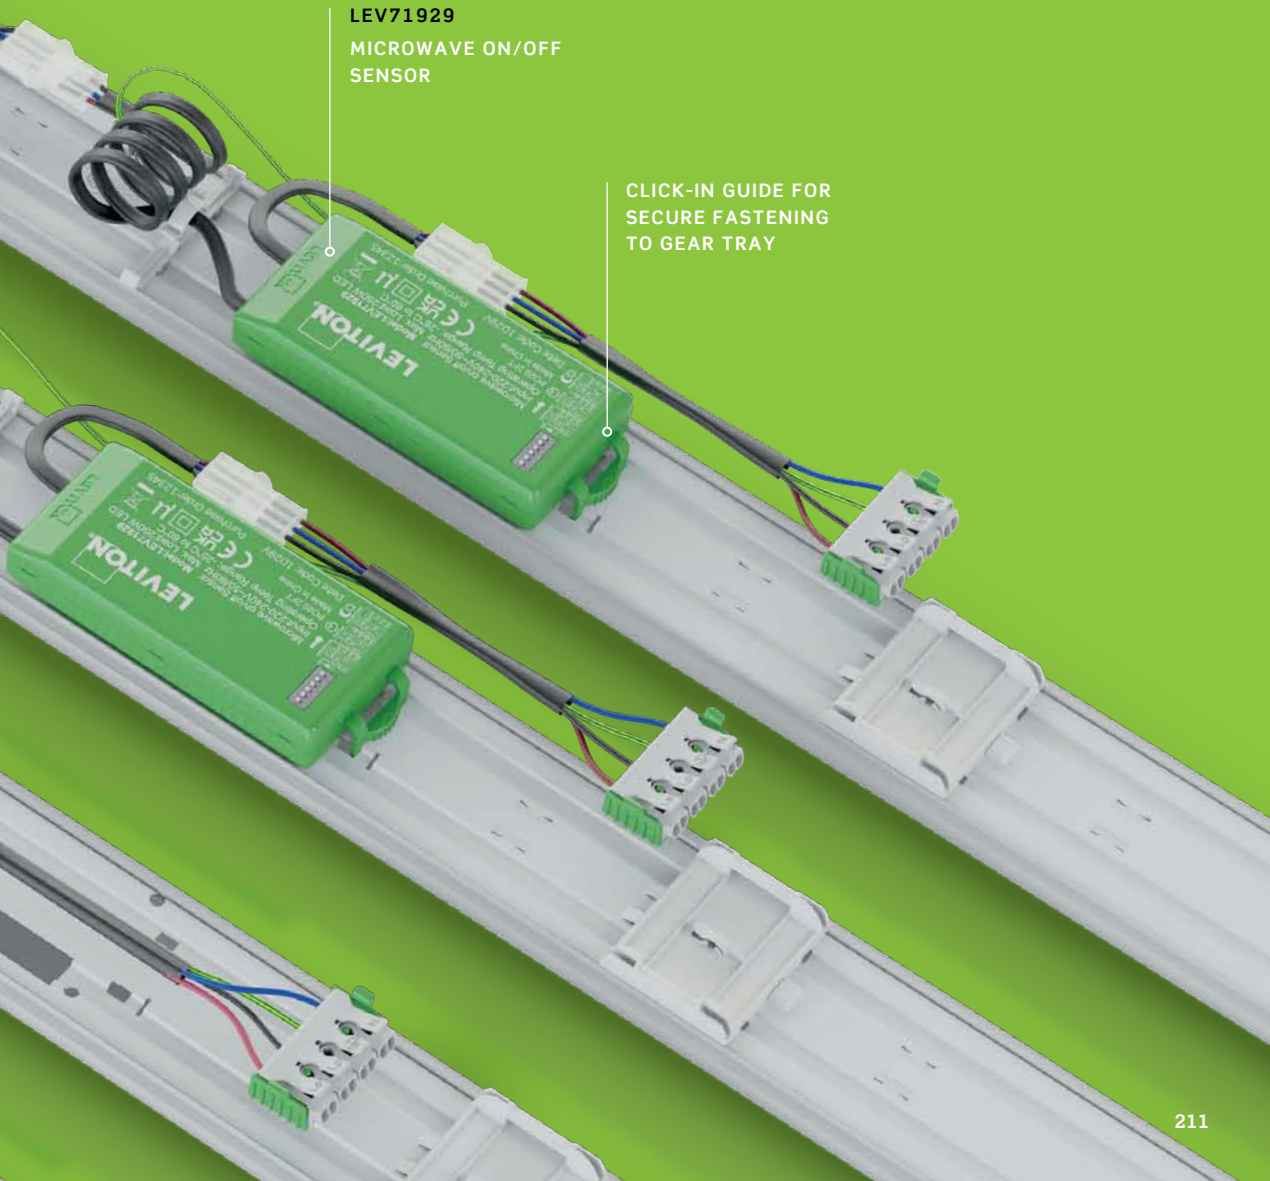

Skypack™ Pro
4ft Single

- Secure quick release button mechanism
- Detachable terminal block with multiple positions
- Keyhole BESA mounting points
- Flexible surface mount positions
- Pre-moulded 2-way cable restraints
- Plug-and-play modular accessories
- High efficiency, up to 148lpcW






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor



IP 40 Rating†
Class 1
80 CRI: Ra
5yr Warranty*
Sensing options
Emergency options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**100100**	Skypack™ Pro 4ft Single	4000K	No	20W	2950	148
JC**100101**	Skypack™ Pro 4ft Single EM	4000K	No	24W	2950	123
JC**100102**	Skypack™ Pro 4ft Single MW on/off	4000K	Yes	20W	2950	148
JC**100103**	Skypack™ Pro 4ft Single MW on/off EM	4000K	Yes	24W	2950	123
JC**100104**	Skypack™ Pro 4ft Single MW dim	4000K	Yes	20W	2950	148
JC**100105**	Skypack™ Pro 4ft Single MW dim EM	4000K	Yes	24W	2950	123
JC**100106**	Skypack™ Pro 4ft Single 1-10V	4000K	Yes	20W	2950	148
JC**100107**	Skypack™ Pro 4ft Single 1-10V EM	4000K	Yes	24W	2950	123
JC**100108**	Skypack™ Pro 4ft Single DALI	4000K	Yes	20W	2950	148
JC**100109**	Skypack™ Pro 4ft Single DALI EM	4000K	Yes	24W	2950	123
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**					
JC**100160**	Skypack™ Pro 2 wire suspension kit (1.5m)					

Body: Steel. **Diffuser:** Polycarbonate.

†IP40 when surface mounted. IP20 when suspended.
*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skypack™ Pro
4ft CCT

NEW

- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 21W/27W/33W/38W
- Secure quick release button mechanism
- Detachable terminal block with multiple positions
- Keyhole BESA mounting points
- Flexible surface mount positions
- Pre-moulded 2-way cable restraints
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor



IP 40 Rating† | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**100200**	Skypack™ Pro 4ft CCT	No	21W/27W/33W/38W	3200/4050/4900/5680
JC**100201**	Skypack™ Pro 4ft CCT EM	No	21W/27W/33W/38W	3200/4050/4900/5680
JC**100202**	Skypack™ Pro 4ft CCT MW on/off	Yes	21W/27W/33W/38W	3200/4050/4900/5680
JC**100203**	Skypack™ Pro 4ft CCT MW on/off EM	Yes	21W/27W/33W/38W	3200/4050/4900/5680
JC**100204**	Skypack™ Pro 4ft CCT MW dim	Yes	21W/27W/33W/38W	3200/4050/4900/5680
JC**100205**	Skypack™ Pro 4ft CCT MW dim EM	Yes	21W/27W/33W/38W	3200/4050/4900/5680
JC**100206**	Skypack™ Pro 4ft CCT 1-10V	Yes	21W/27W/33W/38W	3200/4050/4900/5680
JC**100207**	Skypack™ Pro 4ft CCT 1-10V EM	Yes	21W/27W/33W/38W	3200/4050/4900/5680
JC**100208**	Skypack™ Pro 4ft CCT DALI	Yes	21W/27W/33W/38W	3200/4050/4900/5680
JC**100209**	Skypack™ Pro 4ft CCT DALI EM	Yes	21W/27W/33W/38W	3200/4050/4900/5680
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	Skypack™ Pro 2 wire suspension kit (1.5m)			


Body: Steel. **Diffuser:** Polycarbonate.

†IP40 when surface mounted. IP20 when suspended.
*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skypack™ Pro
5ft Single


- Secure quick release button mechanism
- Detachable terminal block with multiple positions
- Keyhole BESA mounting points
- Flexible surface mount positions
- Pre-moulded 2-way cable restraints
- Plug-and-play modular accessories
- High efficiency, up to 145lpcW





JC**EM003**
Emergency Pack

LEV**71929**
Microwave On/Off Sensor



IP 40 **Rating†** | **Class 1** | 80 **CRI: Ra** | 5yr **Warranty*** | **Sensing options** | **Emergency options**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**100120**	Skypack™ Pro 5ft Single	4000K	No	34W	4920	145
JC**100121**	Skypack™ Pro 5ft Single EM	4000K	No	38W	4920	129
JC**100122**	Skypack™ Pro 5ft Single MW on/off	4000K	Yes	34W	4920	145
JC**100123**	Skypack™ Pro 5ft Single MW on/off EM	4000K	Yes	38W	4920	129
JC**100124**	Skypack™ Pro 5ft Single MW dim	4000K	Yes	34W	4920	145
JC**100125**	Skypack™ Pro 5ft Single MW dim EM	4000K	Yes	38W	4920	129
JC**100126**	Skypack™ Pro 5ft Single 1-10V	4000K	Yes	34W	4920	145
JC**100127**	Skypack™ Pro 5ft Single 1-10V EM	4000K	Yes	38W	4920	129
JC**100128**	Skypack™ Pro 5ft Single DALI	4000K	Yes	34W	4920	145
JC**100129**	Skypack™ Pro 5ft Single DALI EM	4000K	Yes	38W	4920	129
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**					
JC**100160**	Skypack™ Pro 2 wire suspension kit (1.5m)					

Body: Steel. **Diffuser:** Polycarbonate.

†IP40 when surface mounted. IP20 when suspended.
*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skypack™ Pro
5ft CCT

NEW


- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 27W/37W/46W/55W
- Secure quick release button mechanism
- Detachable terminal block with multiple positions
- Keyhole BESA mounting points
- Flexible surface mount positions
- Pre-moulded 2-way cable restraints
- Plug-and-play modular accessories





JC**EM003**
Emergency Pack

LEV**71929**
Microwave On/Off Sensor



IP 40 Rating†
Class 1
Colour switchable
Wattage switchable
80 CRI: Ra
5yr Warranty*
Sensing options
Emergency options

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**100210**	Skypack™ Pro 5ft CCT	No	27W/37W/46W/55W	4100/5400/6650/7800
JC**100211**	Skypack™ Pro 5ft CCT EM	No	27W/37W/46W/55W	4100/5400/6650/7800
JC**100212**	Skypack™ Pro 5ft CCT MW on/off	Yes	27W/37W/46W/55W	4100/5400/6650/7800
JC**100213**	Skypack™ Pro 5ft CCT MW on/off EM	Yes	27W/37W/46W/55W	4100/5400/6650/7800
JC**100214**	Skypack™ Pro 5ft CCT MW dim	Yes	27W/37W/46W/55W	4100/5400/6650/7800
JC**100215**	Skypack™ Pro 5ft CCT MW dim EM	Yes	27W/37W/46W/55W	4100/5400/6650/7800
JC**100216**	Skypack™ Pro 5ft CCT 1-10V	Yes	27W/37W/46W/55W	4100/5400/6650/7800
JC**100217**	Skypack™ Pro 5ft CCT 1-10V EM	Yes	27W/37W/46W/55W	4100/5400/6650/7800
JC**100218**	Skypack™ Pro 5ft CCT DALI	Yes	27W/37W/46W/55W	4100/5400/6650/7800
JC**100219**	Skypack™ Pro 5ft CCT DALI EM	Yes	27W/37W/46W/55W	4100/5400/6650/7800
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	Skypack™ Pro 2 wire suspension kit (1.5m)			

Body: Steel. **Diffuser:** Polycarbonate.

†IP40 when surface mounted. IP20 when suspended.
*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skypack™ Pro
6ft Single

- Secure quick release button mechanism
- Detachable terminal block with multiple positions
- Keyhole BESA mounting points
- Flexible surface mount positions
- Pre-moulded 2-way cable restraints
- Plug-and-play modular accessories
- High efficiency, up to 142lpcW






JC**EM003**
Emergency Pack

LEV**71929**
Microwave On/Off Sensor

IP 40 **Rating†** | **Class 1** | 80 **CRI: Ra** | 5yr **Warranty*** | **Sensing options** | **Emergency options**

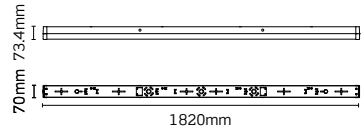

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**100140**	Skypack™ Pro 6ft Single	4000K	No	48W	6825	142
JC**100141**	Skypack™ Pro 6ft Single EM	4000K	No	52W	6825	131
JC**100142**	Skypack™ Pro 6ft Single MW on/off	4000K	Yes	48W	6825	142
JC**100143**	Skypack™ Pro 6ft Single MW on/off EM	4000K	Yes	52W	6825	131
JC**100144**	Skypack™ Pro 6ft Single MW dim	4000K	Yes	48W	6825	142
JC**100145**	Skypack™ Pro 6ft Single MW dim EM	4000K	Yes	52W	6825	131
JC**100146**	Skypack™ Pro 6ft Single 1-10V	4000K	Yes	48W	6825	142
JC**100147**	Skypack™ Pro 6ft Single 1-10V EM	4000K	Yes	52W	6825	131
JC**100148**	Skypack™ Pro 6ft Single DALI	4000K	Yes	48W	6825	142
JC**100149**	Skypack™ Pro 6ft Single DALI EM	4000K	Yes	52W	6825	131
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**					
JC**100160**	Skypack™ Pro 2 wire suspension kit (1.5m)					

Body: Steel. **Diffuser:** Polycarbonate.

†IP40 when surface mounted. IP20 when suspended.
*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Skypack™ Pro
6ft CCT

NEW


- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 37W/51W/63W/75W
- Secure quick release button mechanism
- Detachable terminal block with multiple positions
- Keyhole BESA mounting points
- Flexible surface mount positions
- Pre-moulded 2-way cable restraints
- Plug-and-play modular accessories





JC**EM003**
Emergency Pack

LEV**71929**
Microwave On/Off Sensor

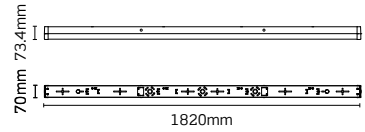

IP 40 Rating†
Class 1
Colour switchable
Wattage switchable
80 CRI: Ra
5yr Warranty*
Sensing options
Emergency options

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**100220**	Skypack™ Pro 6ft CCT	No	37W/51W/63W/75W	5800/7600/9100/10000
JC**100221**	Skypack™ Pro 6ft CCT EM	No	37W/51W/63W/75W	5800/7600/9100/10000
JC**100222**	Skypack™ Pro 6ft CCT MW on/off	Yes	37W/51W/63W/75W	5800/7600/9100/10000
JC**100223**	Skypack™ Pro 6ft CCT MW on/off EM	Yes	37W/51W/63W/75W	5800/7600/9100/10000
JC**100224**	Skypack™ Pro 6ft CCT MW dim	Yes	37W/51W/63W/75W	5800/7600/9100/10000
JC**100225**	Skypack™ Pro 6ft CCT MW dim EM	Yes	37W/51W/63W/75W	5800/7600/9100/10000
JC**100226**	Skypack™ Pro 6ft CCT 1-10V	Yes	37W/51W/63W/75W	5800/7600/9100/10000
JC**100227**	Skypack™ Pro 6ft CCT 1-10V EM	Yes	37W/51W/63W/75W	5800/7600/9100/10000
JC**100228**	Skypack™ Pro 6ft CCT DALI	Yes	37W/51W/63W/75W	5800/7600/9100/10000
JC**100229**	Skypack™ Pro 6ft CCT DALI EM	Yes	37W/51W/63W/75W	5800/7600/9100/10000
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	Skypack™ Pro 2 wire suspension kit (1.5m)			

Body: Steel. **Diffuser:** Polycarbonate.

†IP40 when surface mounted. IP20 when suspended.
*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

I've spent quite a few days at JCC installing samples and talking through the points which make a difference for us contractors. We worked together on the new Skypack™ Pro, to ensure that the features of the ToughLED™ Pro worked well on the new batten.

SAM STEWART

Opus Electrical

Scan QR for electrician video




opus
ELECTRICAL

NEW
VARIANTS

ToughLED™ Pro

NEW CCT and wattage selectable variants




LOCK-IN-PLACE SIDE CLIP DESIGN



ToughLED™ Pro features side fastening clips that can be secured into a 90° position to ensure they don't get in the way during installation or when attaching the diffuser.

DETACHABLE 4-WAY TERMINAL BLOCK

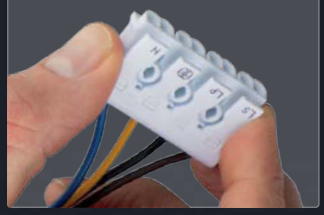

A detachable 4-way loop-in, loop-out terminal block that can be positioned in four locations along the base to meet any cable entry point.

COLOUR & WATTAGE SELECTABLE VARIANTS



A simple switch in the fitting allows users to select 3000K, 4000K, or 5700K and adjust wattage to control output and meet lux requirements.

UK Registered Design Numbers: GB6175833, GB6175834, GB6175835 & GB6175836.
Utility Patent Number: GB2612649.



ToughLED™ Pro

Lock-in-place side clip design**

ToughLED™ Pro features side fastening clips that can be secured into a 90° position to ensure they don't get in the way during installation or when attaching the diffuser.

**Patent pending | †UK Registered Design No. 6175833



ToughLED™ Pro


Detachable terminal block with multiple positions**


ToughLED™ Pro features a detachable 4-way loop-in, loop-out terminal block that can be positioned in four locations along the base and rotated 180° to meet any cable entry point without the need for any tools.

**Patent pending | †UK Registered Design No. 6175833

Four, detachable easy-click terminal block positions

ToughLED™ Pro features four easy-click terminal block mounting positions to simplify installation. In addition, installers can easily rotate the terminal block 180° to meet any cable entry point.

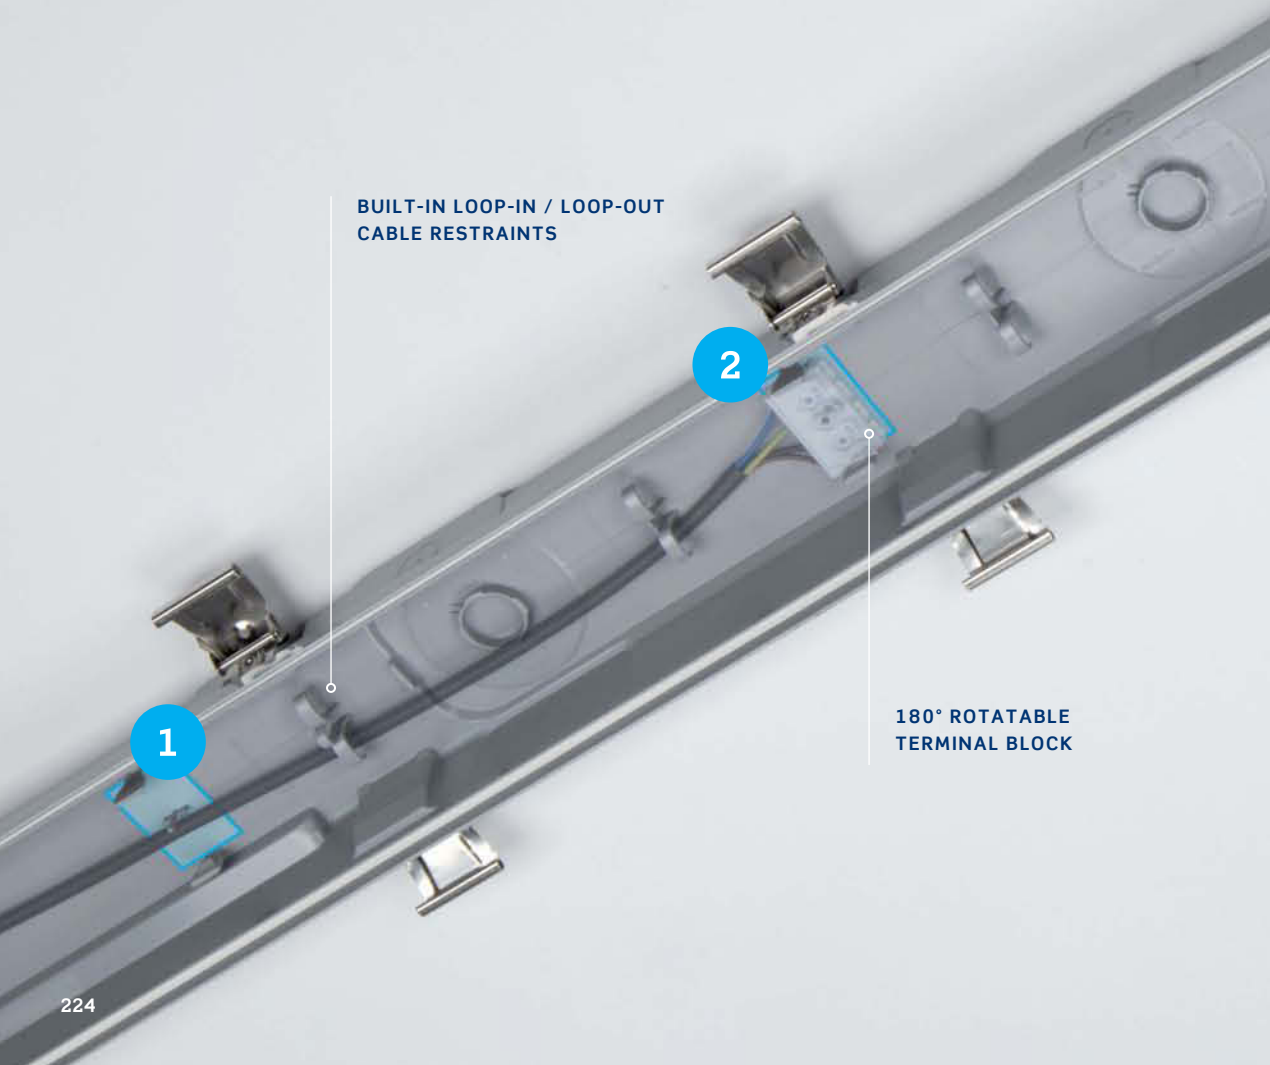

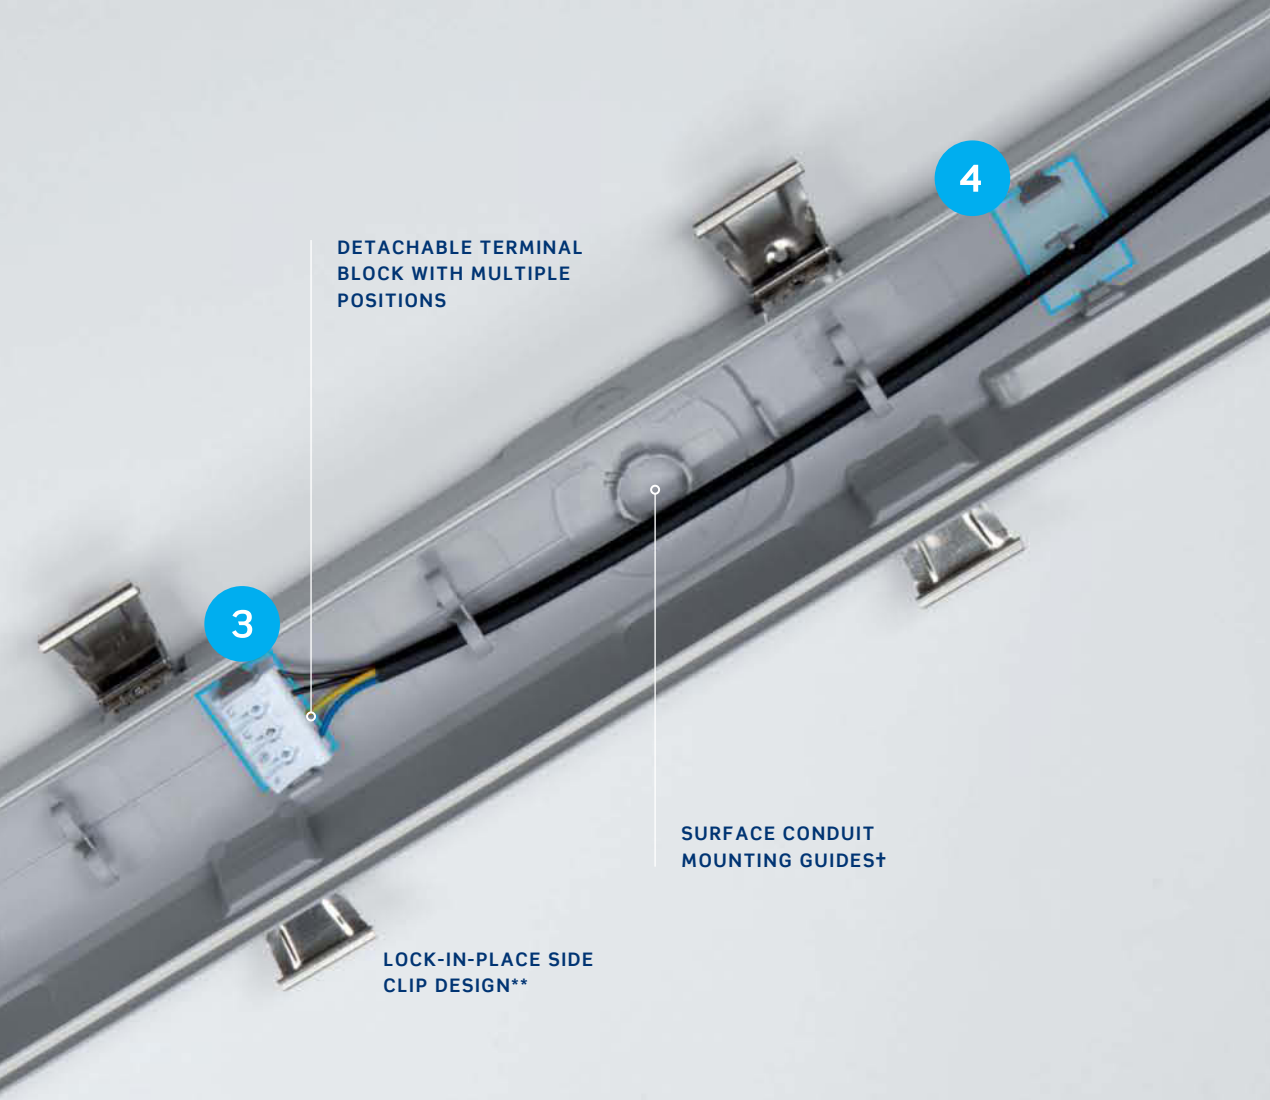



Two-part lockable IP66 rear gasket**

A two-part lockable IP66 surface mounting gasket maintains ingress protection for rear cable entry when surface mounting.



Pre-moulded 2-way cable restraints

Cable restraints ensure cables are secured neatly and avoid interference with the diffuser and internal gear when closing the fixture.

**Patent pending | †UK Registered Design No. 6175833



IK10 and IP66 rated protection

ToughLED™ Pro has been tested and verified by the LIA to be IP66 & IK10 rated, providing maximum protection against the elements and extreme environments.

IK10 rated, protected against external impact

IK10 rated, ideal for industrial, commercial, public & other high-traffic areas that are subject to damage or vandalism.


IP66, dust-tight and protected against high pressure jets

An IP66 rating means that ToughLED™ Pro is protected from high-pressure water jets from any direction and is dust-tight.

ToughLED™ Pro

Extra wide surface bracket rail for flexible mounting locations

ToughLED™ Pro provides the flexibility when surface mounting to locate joists. The strengthened surface bracket ensures an ultra secure connection in the event of impact.

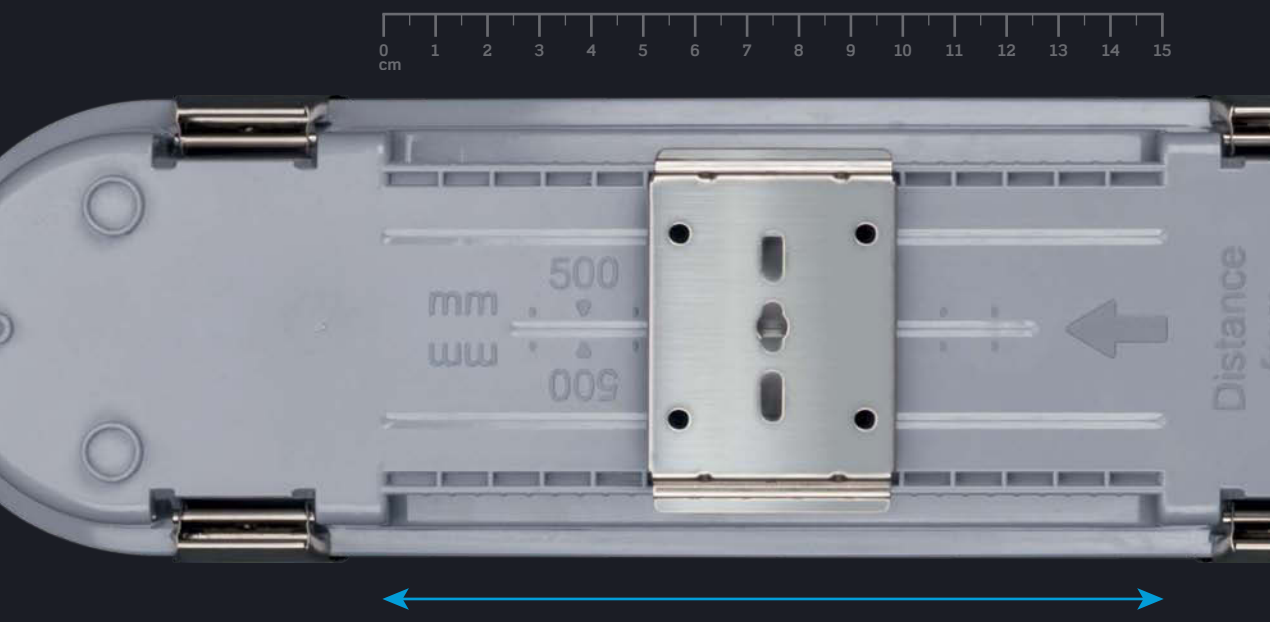

Scan QR code for installation video

MOUNT ONTO CONDUIT BOXES SPACED 600MM APART

SIX 20MM SIDE CONDUIT ENTRY POINTS



Surface conduit mounting guides†

All fixing points are marked on the outside and inside of the ToughLED™ Pro base. Pilot guides ensure accurate pre-drilling and fixing of BESA conduit boxes.

**Patent pending | †UK Registered Design No. 6175833

Completely versatile conduit mounting guides

The main body of ToughLED™ Pro is wide enough to ensure coverage when retrofitting and the correct width for BESA conduit boxes.

11 surface conduit entry guides (two end, six side & three rear)



OPTION TO MOUNT BESA CONDUIT BOXES AT UP TO 1320MM USING THE MOUNTING BRACKET


TWO 20MM END CONDUIT ENTRY POINTS

ANGLED END CONDUIT POINTS TO ALIGN WITH CEILING CONDUIT LEVEL

Modular accessories to suit all applications

Combine emergency and microwave sensor modules in any combination to create the desired products for the installation.

Scan QR code for installation video

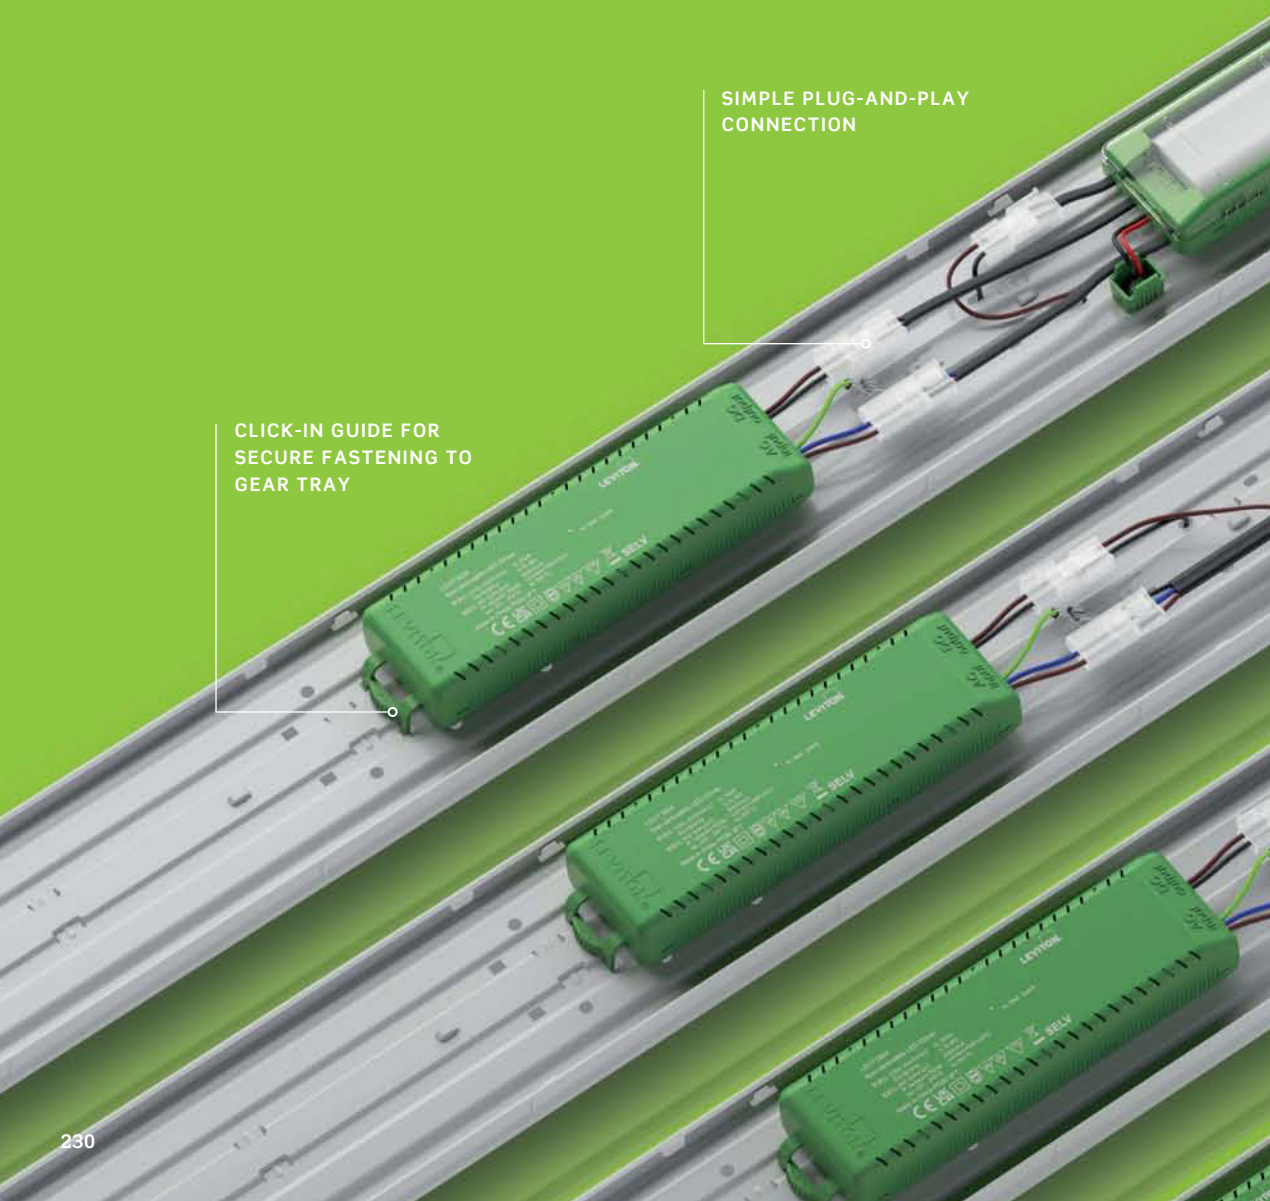


LEV71929
MICROWAVE ON/OFF SENSOR
JCEM003
EMERGENCY PACK MODULE
STANDARD TERMINAL PREWIRED WITH PERMANENT LIVE

ToughLED™ Pro
4ft CCT Frosted

NEW

- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 19W/25W/31W/37W
- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | Colour switchable | Wattage switchable | CRI: Ra 80 | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**180100**	4ft CCT Frosted	No	19W/25W/31W/37W	3350/4300/5100/6000
JC**180101**	4ft CCT EM Frosted	No	19W/25W/31W/37W	3350/4300/5100/6000
JC**180102**	4ft CCT MW On/Off Frosted	Yes	19W/25W/31W/37W	3350/4300/5100/6000
JC**180103**	4ft CCT MW On/Off Em Frosted	Yes	19W/25W/31W/37W	3350/4300/5100/6000
JC**180104**	4ft CCT MW Dim Frosted	Yes**	19W/25W/31W/37W	3350/4300/5100/6000
JC**180105**	4ft CCT MW Dim Em Frosted	Yes**	19W/25W/31W/37W	3350/4300/5100/6000
JC**180106/1-10V**	4ft CCT 1-10V Frosted	Yes	19W/25W/31W/37W	3350/4300/5100/6000
JC**180106/DALI**	4ft CCT DALI Frosted	Yes	19W/25W/31W/37W	3350/4300/5100/6000
JC**180107/1-10V**	4ft CCT 1-10V Em Frosted	Yes	19W/25W/31W/37W	3350/4300/5100/6000
JC**180107/DALI**	4ft CCT DALI Em Frosted	Yes	19W/25W/31W/37W	3350/4300/5100/6000
JC**180107/DALIDALI**	4ft CCT DALI Addressable Em Frosted	Yes	19W/25W/31W/37W	3350/4300/5100/6000
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)			

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
4ft CCT White Opal

NEW

- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 19W/25W/31W/37W
- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | Colour switchable | **Wattage switchable** | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**180108**	4ft CCT White Opal	No	19W/25W/31W/37W	3100/4000/4800/5550
JC**180109**	4ft CCT EM White Opal	No	19W/25W/31W/37W	3100/4000/4800/5550
JC**180110**	4ft CCT MW On/Off White Opal	Yes	19W/25W/31W/37W	3100/4000/4800/5550
JC**180111**	4ft CCT MW On/Off Em White Opal	Yes	19W/25W/31W/37W	3100/4000/4800/5550
JC**180112**	4ft CCT MW Dim White Opal	Yes**	19W/25W/31W/37W	3100/4000/4800/5550
JC**180113**	4ft CCT MW Dim Em White Opal	Yes**	19W/25W/31W/37W	3100/4000/4800/5550
JC**180114/1-10V**	4ft CCT 1-10V White Opal	Yes	19W/25W/31W/37W	3100/4000/4800/5550
JC**180114/DALI**	4ft CCT DALI White Opal	Yes	19W/25W/31W/37W	3100/4000/4800/5550
JC**180115/1-10V**	4ft CCT 1-10V Em White Opal	Yes	19W/25W/31W/37W	3100/4000/4800/5550
JC**180115/DALI**	4ft CCT DALI Em White Opal	Yes	19W/25W/31W/37W	3100/4000/4800/5550
JC**180115/DALIDALI**	4ft CCT DALI Addressable Em Frosted	Yes	19W/25W/31W/37W	3100/4000/4800/5550
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)			

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
4ft Single Frosted

Scan QR code for product video

- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**180001**	4ft Single Frosted	4000K	No	18W	2600	144
JC**180002**	4ft Single Emergency Frosted	4000K	No	22W	2600	120
JC**180003**	4ft Single Microwave On/Off Frosted	4000K	No	18W	2600	144
JC**180004**	4ft Single Microwave On/Off Em Frosted	4000K	No	22W	2600	120
JC**180005**	4ft Single Microwave Dim Frosted	4000K	Yes**	18W	2600	144
JC**180006**	4ft Single Microwave Dim Em Frosted	4000K	Yes**	22W	2600	120
JC**180007/1-10V**	4ft Single 1-10V Frosted	4000K	Yes	18W	2600	144
JC**180007/DALI**	4ft Single DALI Frosted	4000K	Yes	18W	2600	144
JC**180008/1-10V**	4ft Single 1-10V Em Frosted	4000K	Yes	22W	2600	120
JC**180008/DALI**	4ft Single DALI Em Frosted	4000K	Yes	22W	2600	120
JC**180008/DALIDALI**	4ft Single DALI Addressable Em Frosted	4000K	Yes	22W	2600	120
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **ToughLED™ Pro Microwave Dim**					
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)					

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
4ft Single White Opal

Scan QR code for product video

- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**180009**	4ft Single White Opal	4000K	No	18W	2400	133
JC**180010**	4ft Single Emergency White Opal	4000K	No	22W	2400	109
JC**180011**	4ft Single Microwave On/Off White Opal	4000K	No	18W	2400	133
JC**180012**	4ft Single Microwave On/Off Em White Opal	4000K	No	22W	2400	109
JC**180013**	4ft Single Microwave Dim White Opal	4000K	Yes**	18W	2400	133
JC**180014**	4ft Single Microwave Dim Em White Opal	4000K	Yes**	22W	2400	109
JC**180015/1-10V**	4ft Single 1-10V White Opal	4000K	Yes	18W	2400	133
JC**180015/DALI**	4ft Single DALI White Opal	4000K	Yes	18W	2400	133
JC**180016/1-10V**	4ft Single 1-10V Em White Opal	4000K	Yes	22W	2400	109
JC**180016/DALI**	4ft Single DALI Em White Opal	4000K	Yes	22W	2400	109
JC**180016/DALIDALI**	4ft Single DALI Addressable Em White Opal	4000K	Yes	22W	2400	109
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **ToughLED™ Pro Microwave Dim**					
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)					

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
5ft CCT Frosted

NEW

- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 30W/40W/52W/63W
- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**180116**	5ft CCT Frosted	No	30W/40W/52W/63W	4700/6050/7700/8850
JC**180117**	5ft CCT EM Frosted	No	30W/40W/52W/63W	4700/6050/7700/8850
JC**180118**	5ft CCT MW On/Off Frosted	Yes	30W/40W/52W/63W	4700/6050/7700/8850
JC**180119**	5ft CCT MW On/Off Em Frosted	Yes	30W/40W/52W/63W	4700/6050/7700/8850
JC**180120**	5ft CCT MW Dim Frosted	Yes**	30W/40W/52W/63W	4700/6050/7700/8850
JC**180121**	5ft CCT MW Dim Em Frosted	Yes**	30W/40W/52W/63W	4700/6050/7700/8850
JC**180122/1-10V**	5ft CCT 1-10V Frosted	Yes	30W/40W/52W/63W	4700/6050/7700/8850
JC**180122/DALI**	5ft CCT DALI Frosted	Yes	30W/40W/52W/63W	4700/6050/7700/8850
JC**180123/1-10V**	5ft CCT 1-10V Em Frosted	Yes	30W/40W/52W/63W	4700/6050/7700/8850
JC**180123/DALI**	5ft CCT DALI Em Frosted	Yes	30W/40W/52W/63W	4700/6050/7700/8850
JC**180123/DALIDALI**	5ft CCT DALI Addressable Em Frosted	Yes	30W/40W/52W/63W	4700/6050/7700/8850
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)			

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
5ft CCT White Opal

NEW

- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 30W/40W/52W/63W
- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | Colour switchable | Wattage switchable | CRI: Ra 80 | Warranty* 5yr | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**180124**	5ft CCT White Opal	No	30W/40W/52W/63W	4350/5500/7000/8000
JC**180125**	5ft CCT EM White Opal	No	30W/40W/52W/63W	4350/5500/7000/8000
JC**180126**	5ft CCT MW On/Off White Opal	Yes	30W/40W/52W/63W	4350/5500/7000/8000
JC**180127**	5ft CCT MW On/Off Em White Opal	Yes	30W/40W/52W/63W	4350/5500/7000/8000
JC**180128**	5ft CCT MW Dim White Opal	Yes**	30W/40W/52W/63W	4350/5500/7000/8000
JC**180129**	5ft CCT MW Dim Em White Opal	Yes**	30W/40W/52W/63W	4350/5500/7000/8000
JC**180130/1-10V**	5ft CCT 1-10V White Opal	Yes	30W/40W/52W/63W	4350/5500/7000/8000
JC**180130/DALI**	5ft CCT DALI White Opal	Yes	30W/40W/52W/63W	4350/5500/7000/8000
JC**180131/1-10V**	5ft CCT 1-10V Em White Opal	Yes	30W/40W/52W/63W	4350/5500/7000/8000
JC**180131/DALI**	5ft CCT DALI Em White Opal	Yes	30W/40W/52W/63W	4350/5500/7000/8000
JC**180131/DALIDALI**	5ft CCT DALI Addressable Em Frosted	Yes	30W/40W/52W/63W	4350/5500/7000/8000
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)			

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
5ft Single Frosted

Scan QR code for product video

- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor

IP66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK10 Rating



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**180033**	5ft Single Frosted	4000K	No	29W	4200	145
JC**180034**	5ft Single Emergency Frosted	4000K	No	33W	4200	127
JC**180035**	5ft Single Microwave On/Off Frosted	4000K	No	29W	4200	145
JC**180036**	5ft Single Microwave On/Off Em Frosted	4000K	No	33W	4200	127
JC**180037**	5ft Single Microwave Dim Frosted	4000K	Yes**	29W	4200	145
JC**180038**	5ft Single Microwave Dim Em Frosted	4000K	Yes**	33W	4200	127
JC**180039/1-10V**	5ft Single 1-10V Frosted	4000K	Yes	29W	4200	145
JC**180039/DALI**	5ft Single DALI Frosted	4000K	Yes	29W	4200	145
JC**180040/1-10V**	5ft Single 1-10V Em Frosted	4000K	Yes	33W	4200	127
JC**180040/DALI**	5ft Single DALI Em Frosted	4000K	Yes	33W	4200	127
JC**180040/DALIDALI**	5ft Single DALI Addressable Em Frosted	4000K	Yes	33W	4200	127
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **ToughLED™ Pro Microwave Dim**					
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)					

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
5ft Single White Opal

Scan QR code for product video

- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories






JC**EM003**
Emergency Pack



LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**180041**	5ft Single White Opal	4000K	No	29W	3900	134
JC**180042**	5ft Single Emergency White Opal	4000K	No	33W	3900	120
JC**180043**	5ft Single Microwave On/Off White Opal	4000K	No	29W	3900	134
JC**180044**	5ft Single Microwave On/Off Em White Opal	4000K	No	33W	3900	120
JC**180045**	5ft Single Microwave Dim White Opal	4000K	Yes**	29W	3900	134
JC**180046**	5ft Single Microwave Dim Em White Opal	4000K	Yes**	33W	3900	120
JC**180047/1-10V**	5ft Single 1-10V White Opal	4000K	Yes	29W	3900	134
JC**180047/DALI**	5ft Single DALI White Opal	4000K	Yes	29W	3900	134
JC**180048/1-10V**	5ft Single 1-10V Em White Opal	4000K	Yes	33W	3900	120
JC**180048/DALI**	5ft Single DALI Em White Opal	4000K	Yes	33W	3900	120
JC**180048/DALIDALI**	5ft Single DALI Addressable Em White Opal	4000K	Yes	33W	3900	120
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **ToughLED™ Pro Microwave Dim**					
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)					

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
6ft CCT Frosted


NEW


- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 37W/50W/60W/72W
- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories



JC**EM003**
Emergency Pack

LEV**71929**
Microwave On/Off Sensor





CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**180136**	6ft CCT Frosted	No	37W/50W/60W/72W	5450/6950/8800/10150
JC**180137**	6ft CCT EM Frosted	No	37W/50W/60W/72W	5450/6950/8800/10150
JC**180138**	6ft CCT MW On/Off Frosted	Yes	37W/50W/60W/72W	5450/6950/8800/10150
JC**180139**	6ft CCT MW On/Off Em Frosted	Yes	37W/50W/60W/72W	5450/6950/8800/10150
JC**180140**	6ft CCT MW Dim Frosted	Yes**	37W/50W/60W/72W	5450/6950/8800/10150
JC**180141**	6ft CCT MW Dim Em Frosted	Yes**	37W/50W/60W/72W	5450/6950/8800/10150
JC**180142/1-10V**	6ft CCT 1-10V Frosted	Yes	37W/50W/60W/72W	5450/6950/8800/10150
JC**180142/DALI**	6ft CCT DALI Frosted	Yes	37W/50W/60W/72W	5450/6950/8800/10150
JC**180143/1-10V**	6ft CCT 1-10V Em Frosted	Yes	37W/50W/60W/72W	5450/6950/8800/10150
JC**180143/DALI**	6ft CCT DALI Em Frosted	Yes	37W/50W/60W/72W	5450/6950/8800/10150
JC**180143/DALIDALI**	6ft CCT DALI Addressable Em Frosted	Yes	37W/50W/60W/72W	5450/6950/8800/10150
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)			

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
6ft CCT White Opal

NEW


- Colour selectable between 3000K, 4000K & 5700K
- Four wattage selectable 37W/50W/60W/72W
- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories



JC**EM003**
Emergency Pack

LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**180144**	6ft CCT White Opal	No	37W/50W/60W/72W	5000/6350/8050/9200
JC**180145**	6ft CCT EM White Opal	No	37W/50W/60W/72W	5000/6350/8050/9200
JC**180146**	6ft CCT MW On/Off White Opal	Yes	37W/50W/60W/72W	5000/6350/8050/9200
JC**180147**	6ft CCT MW On/Off Em White Opal	Yes	37W/50W/60W/72W	5000/6350/8050/9200
JC**180148**	6ft CCT MW Dim White Opal	Yes**	37W/50W/60W/72W	5000/6350/8050/9200
JC**180149**	6ft CCT MW Dim Em White Opal	Yes**	37W/50W/60W/72W	5000/6350/8050/9200
JC**180150/1-10V**	6ft CCT 1-10V White Opal	Yes	37W/50W/60W/72W	5000/6350/8050/9200
JC**180150/DALI**	6ft CCT DALI White Opal	Yes	37W/50W/60W/72W	5000/6350/8050/9200
JC**180151/1-10V**	6ft CCT 1-10V Em White Opal	Yes	37W/50W/60W/72W	5000/6350/8050/9200
JC**180151/DALI**	6ft CCT DALI Em White Opal	Yes	37W/50W/60W/72W	5000/6350/8050/9200
JC**180151/DALIDALI**	6ft CCT DALI Addressable Em Frosted	Yes	37W/50W/60W/72W	5000/6350/8050/9200
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**			
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**			
LEV**71932**	Microwave Step Dim Remote Control for use with **JCC Microwave Dim LED Battens**			
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)			

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
6ft Single Frosted

Scan QR code for product video


- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories



JC**EM003**
Emergency Pack

LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**180065**	6ft Single Frosted	4000K	No	39W	5300	136
JC**180066**	6ft Single Emergency Frosted	4000K	No	43W	5300	123
JC**180067**	6ft Single Microwave On/Off Frosted	4000K	No	39W	5300	136
JC**180068**	6ft Single Microwave On/Off Em Frosted	4000K	No	43W	5300	123
JC**180069**	6ft Single Microwave Dim Frosted	4000K	Yes**	39W	5300	136
JC**180070**	6ft Single Microwave Dim Em Frosted	4000K	Yes**	43W	5300	123
JC**180071/1-10V**	6ft Single 1-10V Frosted	4000K	Yes	39W	5300	136
JC**180071/DALI**	6ft Single DALI Frosted	4000K	Yes	39W	5300	136
JC**180072/1-10V**	6ft Single 1-10V Em Frosted	4000K	Yes	43W	5300	123
JC**180072/DALI**	6ft Single DALI Em Frosted	4000K	Yes	43W	5300	123
JC**180072/DALIDALI**	6ft Single DALI Addressable Em Frosted	4000K	Yes	43W	5300	123
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **ToughLED™ Pro Microwave Dim**					
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)					

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

ToughLED™ Pro
6ft Single White Opal

Scan QR code for product video


- 90° lock-in-place side clip design
- Detachable, loop-in/loop-out 4pin terminal block with emergency provision
- Three rear conduit entry points with BESA guides
- Six 20mm side conduit entry points and two end conduit entry points
- Plug-and-play modular accessories



JC**EM003**
Emergency Pack

LEV**71929**
Microwave On/Off Sensor

IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Emergency options | IK 10 Rating



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**180073**	6ft Single White Opal	4000K	No	39W	4900	126
JC**180074**	6ft Single Emergency White Opal	4000K	No	43W	4900	114
JC**180075**	6ft Single Microwave On/Off White Opal	4000K	No	39W	4900	126
JC**180076**	6ft Single Microwave On/Off Em White Opal	4000K	No	43W	4900	114
JC**180077**	6ft Single Microwave Dim White Opal	4000K	Yes**	39W	4900	126
JC**180078**	6ft Single Microwave Dim Em White Opal	4000K	Yes**	43W	4900	114
JC**180079/1-10V**	6ft Single 1-10V White Opal	4000K	Yes	39W	4900	126
JC**180079/DALI**	6ft Single DALI White Opal	4000K	Yes	39W	4900	126
JC**180080/1-10V**	6ft Single 1-10V Em White Opal	4000K	Yes	43W	4900	114
JC**180080/DALI**	6ft Single DALI Em White Opal	4000K	Yes	43W	4900	114
JC**180080/DALIDALI**	6ft Single DALI Addressable Em White Opal	4000K	Yes	43W	4900	114
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
JC**EM003ST**	Emergency Pack Self-Test for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**					
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**					
LEV**71932**	Microwave Step Dim Remote Control for use with **ToughLED™ Pro Microwave Dim**					
JC**100160**	ToughLED™ Pro 2 wire suspension kit (1.5m)					

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Microwave dimming only.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.





Modular emergency and sensor packs

For use with ToughLED™ Pro & Skypack™ Pro

JC**EM003**

Emergency Pack Module

LifePO4 battery with 5 year warranty

Clear view of battery with easy clip connector

Cable lengths predetermined for clean wiring

Tool-less clip in tray connection with unique hinge and lock mechanism



LEV**71929**

Microwave On/Off Sensor

Dip switch and remote sensor options for Microwave On/Off sensors

Cable lengths predetermined for clean wiring

Tool-less clip in tray connection with unique hinge and lock mechanism

SIMPLE PLUG AND PLAY INSTALLATION



ADAPT FITTINGS INTO EM OR MW VERSIONS



CLICK-IN GUIDE FOR SECURE FASTENING



Plug-and-play modular emergency and sensor packs

Plug-and-play emergency and microwave sensor modules allow standard JCC LED battens to be easily adapted to emergency, microwave and microwave emergency variants.

The flexibility to convert any standard product into Emergency or Microwave



JCC LED BATTEN

EMERGENCY PACK MODULE
JCEM003 (SOLD SEPARATELY)

LED BATTEN
EMERGENCY

Full range of options

- Emergency
- Emergency Self-Test*
- Microwave Step Dim*
- Microwave On/Off
- DALI Dimmable
- 1-10V Dimmable

 *Available in any combination

Simple tool-less installation

Easily click the emergency and microwave sensor modules into the LED Batten tray without the need for tools or screws.

EMERGENCY PACK
MODULE JCEM003
(SOLD SEPARATELY)



Simple plug-and-play clip connection

Cable lengths set to align with component positions, and clips are unique to each connection to ensure incorrect wiring cannot occur.



Click-in guide for secure fastening to gear tray

Modules clip directly into the gear tray, allowing for secure fastening and simple conversion at the point of installation.

Modular Emergency Packs

- Simple Plug and play Emergency Packs for JCC LED Battens
- Self-Test Emergency Pack (JC**EM003ST**) also available
- Slimline construction, designed specifically for JCC LED Battens
- LifePO4 battery with 5 year warranty
- Clear view of battery with easy clip connector
- Cable lengths predetermined for clean wiring
- Tool-less clip in tray connection with unique hinge and lock mechanism

Scan QR code for product video



IP 20 Rating | Class 2 | 5yr Warranty* | Emergency options

CODE	DESCRIPTION
JC**EM003**	Emergency Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**
JC**EM003ST**	Emergency Self-Test Pack for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes battery. Terms & Conditions apply.

Modular Sensor Packs

- Simple Plug and play Microwave On/Off sensor for JCC LED Battens
- Step dimming available as complete fitting (see pages 232-243)
- Slimline construction, designed specifically for JCC LED Battens
- Cable lengths predetermined for clean wiring
- Tool-less clip in tray connection with unique hinge and lock mechanism
- Microwave sensor remote control (LEV**71930**) also available

Scan QR code for product video



LEV**71930**
Microwave On/Off Sensor Remote Control

IP 20 **Rating** | **Class 2** | 5yr **Warranty*** | **Sensing options**

CODE	DESCRIPTION
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**
LEV**71932**	Microwave Step Dim Remote Control for use with **Microwave Dim LED Battens**

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

The old side clips on many non-corrosive fittings always fall off or get in the way when installing. It's been great to spend time with the product team and see the designs that solve this issue and make the job for us contractors easier.

KEVIN LIVERSAGE

Kevlar Electrical

Scan QR for electrician video




KEVLAR
ELECTRICAL LTD
Distance from centre

Industrial

Toughbay™ Pro 256

Toughbay™ Pro High Output 264

Toughbay™ Pro DALI 265

Toughbay™ Pro Dim Sensors 266

Retail Pendant 268

Novium LED Wall Pack 270

Polycarbonate LED Wall Pack 275

LED Wall Pack 276

LED Post Top 278


Streetlight 280

NEW
VARIANTS

Toughbay™ Pro

With 5 year warranty including 1 year on-site*

WATTAGE SELECTABLE



MULTIPLE BEAM ANGLE OPTIONS



IP65 PLUG AND PLAY MW & PIR MODULES



*See jcc.co.uk for T's & C's





LEV**71950**
PIR Dim Sensor IP65
Max mounting height: 12m



LEV**71951**
Microwave Dim Sensor IP65
Max mounting height: 12m

IP65 plug and play microwave and PIR sensing modules

Plug and play sensing modules allow standard Toughbay™ Pro fittings to be easily adapted into microwave and PIR sensing options. The secure bung connection ensures the IP65 rating is maintained.



IP65 Emergency pack with wide 130° beam angle

Separate LED modules on the emergency pack illuminate when emergency lighting is required. The 130° beam angle allows for wider spacing meaning less emergency fittings are required.




Spirit level built into emergency pack

A spirit level has been built into the emergency pack with an adjustable plate to ensure the product stays level.


Wide 130° beam means emergency versions can be spaced further apart

A wide 130° beam angle means each emergency fitting covers a wider area within the application than traditional emergency fittings. Therefore, less emergency versions are required as they can be spaced much further apart, saving money and energy.

Toughbay™ Pro Emergency spacing

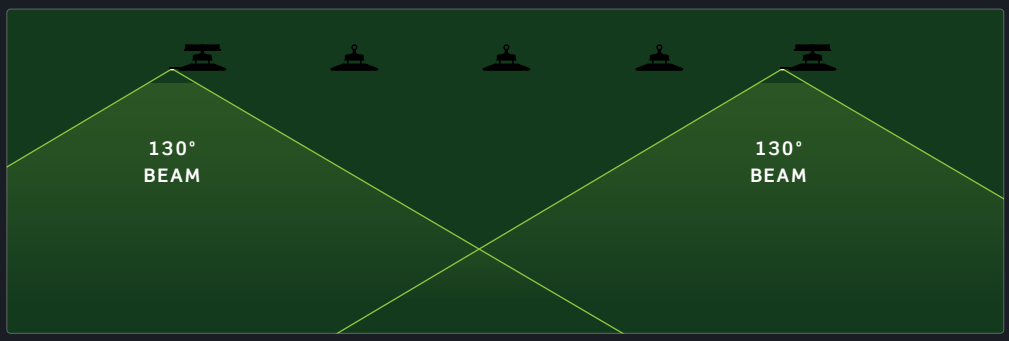


Traditional Emergency spacing

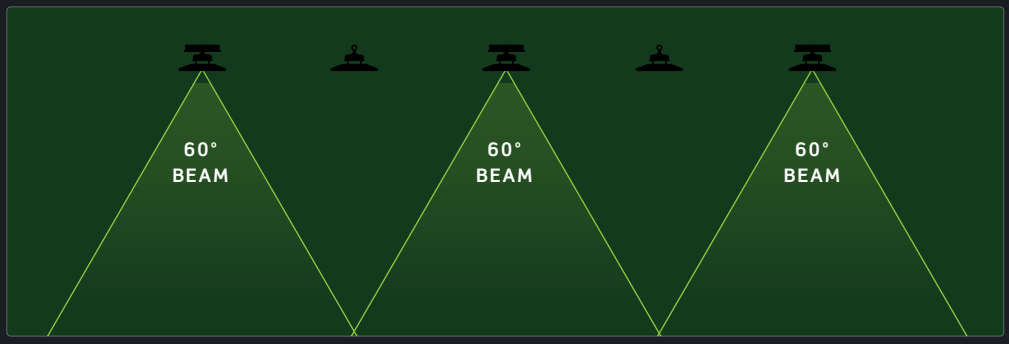


Toughbay™ Pro
100W / 75W / 50W (5700K)

- Plug and play Microwave and PIR module options available
- Wattage selectable via a simple switch, 100W/75W/50W
- Available in 60°, 90° and 120° beam angles
- 1-10V dimmable as standard
- Remote control available to control PIR on/off, MW on/off and MW step dim (LEV**71808**)
- Ultra efficient, up to 150 Lumens per circuit Watt
- IP65 emergency option with wide 130° angle
- Surface mount bracket also available
- 5-year warranty including 1 year on-site



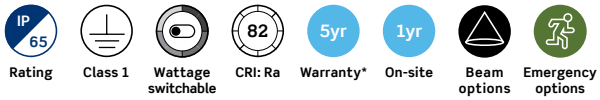

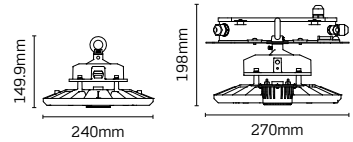

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**040200**	Toughbay Pro 60° 1-10V Dimmable	5700K	Yes	100W/75W/50W	Up to 14,200
JC**040201**	Toughbay Pro 60° 1-10V Dimmable Self-Test Emergency	5700K	Yes	100W/75W/50W	Up to 14,200
JC**040202**	Toughbay Pro 90° 1-10V Dimmable	5700K	Yes	100W/75W/50W	Up to 14,200
JC**040203**	Toughbay Pro 90° 1-10V Dimmable Self-Test Emergency	5700K	Yes	100W/75W/50W	Up to 14,200
JC**040204**	Toughbay Pro 120° 1-10V Dimmable	5700K	Yes	100W/75W/50W	Up to 14,200
JC**040205**	Toughbay Pro 120° 1-10V Dimmable Self-Test Emergency	5700K	Yes	100W/75W/50W	Up to 14,200
JC**040224****	Surface Mount bracket for Toughbay Pro	-	-	-	-
JC**040225**	Surface Mount bracket for Toughbay Pro Emergency	-	-	-	-
JC**040226**	Toughbay Pro Polycarbonate Prismatic Reflector	-	-	-	-
LEV**71950**	Toughbay Pro PIR Dim Sensor IP65	-	-	-	-
LEV**71951**	Toughbay Pro Microwave Dim Sensor IP65	-	-	-	-
LEV**71808**	Remote control for Toughbay Pro MW and PIR sensors	-	-	-	-

Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Steel.
JC040224** mount bracket not suitable for use with emergency versions.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Toughbay™ Pro
150W / 115W / 80W (5700K)


- Plug and play Microwave and PIR module options available
- Wattage selectable via a simple switch, 150W/115W/80W
- Available in 60°, 90° and 120° beam angles
- 1-10V dimmable as standard
- Remote control available to control PIR on/off, MW on/off and MW step dim (LEV**71808**)
- Ultra efficient, up to 150 Lumens per circuit Watt
- IP65 emergency option with wide 130° angle
- Surface mount bracket also available
- 5-year warranty including 1 year on-site



IP 65 **Rating** | **Class 1** | **Wattage switchable** | 82 **CRI: Ra** | 5yr **Warranty*** | 1yr **On-site** | **Beam options** | **Emergency options**



Standard



Emergency

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**040206**	Toughbay Pro 60° 1-10V Dimmable	5700K	Yes	150W/115W/80W	Up to 21,200
JC**040207**	Toughbay Pro 60° 1-10V Dimmable Self-Test Emergency	5700K	Yes	150W/115W/80W	Up to 21,200
JC**040208**	Toughbay Pro 90° 1-10V Dimmable	5700K	Yes	150W/115W/80W	Up to 21,200
JC**040209**	Toughbay Pro 90° 1-10V Dimmable Self-Test Emergency	5700K	Yes	150W/115W/80W	Up to 21,200
JC**040210**	Toughbay Pro 120° 1-10V Dimmable	5700K	Yes	150W/115W/80W	Up to 21,200
JC**040211**	Toughbay Pro 120° 1-10V Dimmable Self-Test Emergency	5700K	Yes	150W/115W/80W	Up to 21,200
JC**040224****	Surface Mount bracket for Toughbay Pro	-	-	-	-
JC**040225**	Surface Mount bracket for Toughbay Pro Emergency	-	-	-	-
JC**040226**	Toughbay Pro Polycarbonate Prismatic Reflector	-	-	-	-
LEV**71950**	Toughbay Pro PIR Dim Sensor IP65	-	-	-	-
LEV**71951**	Toughbay Pro Microwave Dim Sensor IP65	-	-	-	-
LEV**71808**	Remote control for Toughbay Pro MW and PIR sensors	-	-	-	-


Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Steel.
JC040224** mount bracket not suitable for use with emergency versions.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.


Toughbay™ Pro
200W / 150W / 100W (5700K)

- Plug and play Microwave and PIR module options available
- Wattage selectable via a simple switch, 200W/150W/100W
- Available in 60°, 90° and 120° beam angles
- 1-10V dimmable as standard
- Remote control available to control PIR on/off, MW on/off and MW step dim (LEV**71808**)
- Ultra efficient, up to 150 Lumens per circuit Watt
- IP65 emergency option with wide 130° angle
- Surface mount bracket also available
- 5-year warranty including 1 year on-site





Standard



Emergency

IP 65 **Rating** | **Class 1** | **Wattage switchable** | 82 **CRI: Ra** | 5yr **Warranty*** | 1yr **On-site** | **Beam options** | **Emergency options**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**040212**	Toughbay Pro 60° 1-10V Dimmable	5700K	Yes	200W/150W/100W	Up to 27,000
JC**040213**	Toughbay Pro 60° 1-10V Dimmable Self-Test Emergency	5700K	Yes	200W/150W/100W	Up to 27,000
JC**040214**	Toughbay Pro 90° 1-10V Dimmable	5700K	Yes	200W/150W/100W	Up to 27,000
JC**040215**	Toughbay Pro 90° 1-10V Dimmable Self-Test Emergency	5700K	Yes	200W/150W/100W	Up to 27,000
JC**040216**	Toughbay Pro 120° 1-10V Dimmable	5700K	Yes	200W/150W/100W	Up to 27,000
JC**040217**	Toughbay Pro 120° 1-10V Dimmable Self-Test Emergency	5700K	Yes	200W/150W/100W	Up to 27,000
JC**040224****	Surface Mount bracket for Toughbay Pro	-	-	-	-
JC**040225**	Surface Mount bracket for Toughbay Pro Emergency	-	-	-	-
JC**040226**	Toughbay Pro Polycarbonate Prismatic Reflector	-	-	-	-
LEV**71950**	Toughbay Pro PIR Dim Sensor IP65	-	-	-	-
LEV**71951**	Toughbay Pro Microwave Dim Sensor IP65	-	-	-	-
LEV**71808**	Remote control for Toughbay Pro MW and PIR sensors	-	-	-	-


Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Steel.
JC040224** mount bracket not suitable for use with emergency versions.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Toughbay™ Pro
200W / 150W / 100W (4000K)

- Plug and play Microwave and PIR module options available
- Wattage selectable via a simple switch, 200W/150W/100W
- Available in 60°, 90° and 120° beam angles
- 1-10V dimmable as standard
- Remote control available to control PIR on/off, MW on/off and MW step dim (LEV**71808**)
- Ultra efficient, up to 150 Lumens per circuit Watt
- IP65 emergency option with wide 130° angle
- Surface mount bracket also available
- 5-year warranty including 1 year on-site





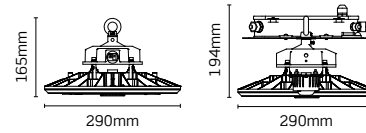

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**040218**	Toughbay Pro 60° 1-10V Dimmable	4000K	Yes	200W/150W/100W	Up to 26,000
JC**040219**	Toughbay Pro 60° 1-10V Dimmable Self-Test Emergency	4000K	Yes	200W/150W/100W	Up to 26,000
JC**040220**	Toughbay Pro 90° 1-10V Dimmable	4000K	Yes	200W/150W/100W	Up to 26,000
JC**040221**	Toughbay Pro 90° 1-10V Dimmable Self-Test Emergency	4000K	Yes	200W/150W/100W	Up to 26,000
JC**040222**	Toughbay Pro 120° 1-10V Dimmable	4000K	Yes	200W/150W/100W	Up to 26,000
JC**040223**	Toughbay Pro 120° 1-10V Dimmable Self-Test Emergency	4000K	Yes	200W/150W/100W	Up to 26,000
JC**040224****	Surface Mount bracket for Toughbay Pro	-	-	-	-
JC**040225**	Surface Mount bracket for Toughbay Pro Emergency	-	-	-	-
JC**040226**	Toughbay Pro Polycarbonate Prismatic Reflector	-	-	-	-
LEV**71950**	Toughbay Pro PIR Dim Sensor IP65	-	-	-	-
LEV**71951**	Toughbay Pro Microwave Dim Sensor IP65	-	-	-	-
LEV**71808**	Remote control for Toughbay Pro MW and PIR sensors	-	-	-	-


Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Steel.
JC040224** mount bracket not suitable for use with emergency versions.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Toughbay™ Pro High Output
200W / 150W / 100W

- Plug and play Microwave and PIR module options available
- Wattage selectable via a simple switch, 200W/150W/100W
- Available in 60°, 90° and 120° beam angles
- 1-10V dimmable as standard
- Remote control available to control PIR on/off, MW on/off and MW step dim (LEV**71808**)
- Ultra efficient, up to 171 Lumens per circuit Watt
- IP65 emergency option with wide 130° angle
- Surface mount bracket also available
- 5-year warranty including 1 year on-site





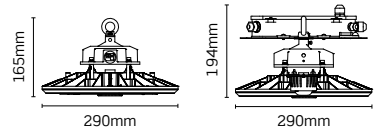

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**040400**	Toughbay Pro High Output 60° 1-10V Dimmable	5700K	Yes	200W/150W/100W	Up to 34,000
JC**040401**	Toughbay Pro High Output 60° 1-10V Dim. Self-Test EM	5700K	Yes	200W/150W/100W	Up to 34,000
JC**040402**	Toughbay Pro High Output 90° 1-10V Dimmable	5700K	Yes	200W/150W/100W	Up to 34,000
JC**040403**	Toughbay Pro High Output 90° 1-10V Dim. Self-Test EM	5700K	Yes	200W/150W/100W	Up to 34,000
JC**040404**	Toughbay Pro High Output 120° 1-10V Dimmable	5700K	Yes	200W/150W/100W	Up to 34,000
JC**040405**	Toughbay Pro High Output 120° 1-10V Dim. Self-Test EM	5700K	Yes	200W/150W/100W	Up to 34,000
JC**040406**	Toughbay Pro High Output 60° 1-10V Dimmable	4000K	Yes	200W/150W/100W	Up to 34,000
JC**040407**	Toughbay Pro High Output 60° 1-10V Dim. Self-Test EM	4000K	Yes	200W/150W/100W	Up to 34,000
JC**040408**	Toughbay Pro High Output 90° 1-10V Dimmable	4000K	Yes	200W/150W/100W	Up to 34,000
JC**040409**	Toughbay Pro High Output 90° 1-10V Dim. Self-Test EM	4000K	Yes	200W/150W/100W	Up to 34,000
JC**040410**	Toughbay Pro High Output 120° 1-10V Dimmable	4000K	Yes	200W/150W/100W	Up to 34,000
JC**040411**	Toughbay Pro High Output 120° 1-10V Dim. Self-Test EM	4000K	Yes	200W/150W/100W	Up to 34,000

Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Toughbay™ Pro DALI CCT
200W / 150W / 100W


NEW

- Two colour selectable 4000K & 5700K
- Available in 60°, 90° and 120° beam angles
- Wattage selectable via a simple switch, 200W/150W/100W
- Ultra efficient, up to 150 Lumens per circuit Watt
- IP65 emergency option with wide 130° angle
- Surface mount bracket also available
- 5-year warranty including 1 year on-site





Standard



Emergency

IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 82 CRI: Ra | 5yr Warranty* | 1yr On-site | Beam options | Emergency options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**040310**	Toughbay Pro 120° DALI	4000K/5700K	Yes	200W/150W/100W	Up to 34,000
JC**040311**	Toughbay Pro 120° DALI Self-Test EM	4000K/5700K	Yes	200W/150W/100W	Up to 34,000
JC**040312**	Toughbay Pro 90° DALI	4000K/5700K	Yes	200W/150W/100W	Up to 34,000
JC**040313**	Toughbay Pro 90° DALI Self-Test EM	4000K/5700K	Yes	200W/150W/100W	Up to 34,000
JC**040314**	Toughbay Pro 60° DALI	4000K/5700K	Yes	200W/150W/100W	Up to 34,000
JC**040315**	Toughbay Pro 60° DALI Self-Test EM	4000K/5700K	Yes	200W/150W/100W	Up to 34,000
JC**040224****	Surface Mount bracket for Toughbay Pro	-	-	-	-
JC**040225**	Surface Mount bracket for Toughbay Pro EM	-	-	-	-
JC**040226**	Toughbay Pro Polycarbonate Prismatic Reflector	-	-	-	-

Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Steel.
JC040224** mount bracket not suitable for use with emergency versions.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Toughbay™ Pro
Dim Sensors IP65

- Plug and play PIR and microwave dim sensors for use with Toughbay™ Pro
- Simple screw on connection
- Max. mounting height 12m
- Remote control available for quick and simple programming (LEV**71808**)

LEV**71950**



LEV**71951**



IP 65 Rating

Class 3

5yr Warranty*

CODE	DESCRIPTION
LEV**71950**	Toughbay Pro PIR Dim Sensor IP65
LEV**71951**	Toughbay Pro Microwave Dim Sensor IP65
LEV**71808**	Remote control for Toughbay Pro MW and PIR sensors


Material: Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughbay™ Pro
Prismatic Reflector

- Polycarbonate prismatic reflector for use with Toughbay™ Pro
- Reduces glare, ideal for retail applications





CODE	DESCRIPTION
JC**040226**	Toughbay Pro Polycarbonate Prismatic Reflector


Material: Polycarbonate.

Retail Pendant CCT
20W/40W/60W

NEW

- Three wattage selectable 20W/40W/60W
- Colour selectable 3000K/4000K/5700K
- White opal or white prismatic options available
- Available in white or black body





IP 44 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | WH White

CODE	DESCRIPTION	WATT	LUMENS	LPCW
JC**040502WHWOP**	Retail Pendant White with Opal Reflector	20W/40W/60W	3050/6050/9050	Up to 153
JC**040502WHWPR**	Retail Pendant White with Prismatic Reflector	20W/40W/60W	3050/6050/9100	Up to 153

Body: Aluminium. **Lens:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Retail Pendant CCT
20W/40W/60W

NEW

- Three wattage selectable 20W/40W/60W
- Colour selectable 3000K/4000K/5700K
- White opal or white prismatic options available
- Available in white or black body





IP 44 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | BLK Black

CODE	DESCRIPTION	WATT	LUMENS	LPCW
JC**040502BLKWOP**	Retail Pendant Black with Opal Reflector	20W/40W/60W	3020/6050/9060	Up to 153
JC**040502BLKWPR**	Retail Pendant Black with Prismatic Reflector	20W/40W/60W	3030/6050/9080	Up to 153

Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Novium LED Wall Pack

High output commercial LED bulkhead

WATTAGE & TWO COLOUR SELECTABLE*




DURABLE IK10 & IP65 RATED PROTECTION



TWO PART BODY FOR SIMPLE TERMINATION



*Wattage selectable not available for 5W version

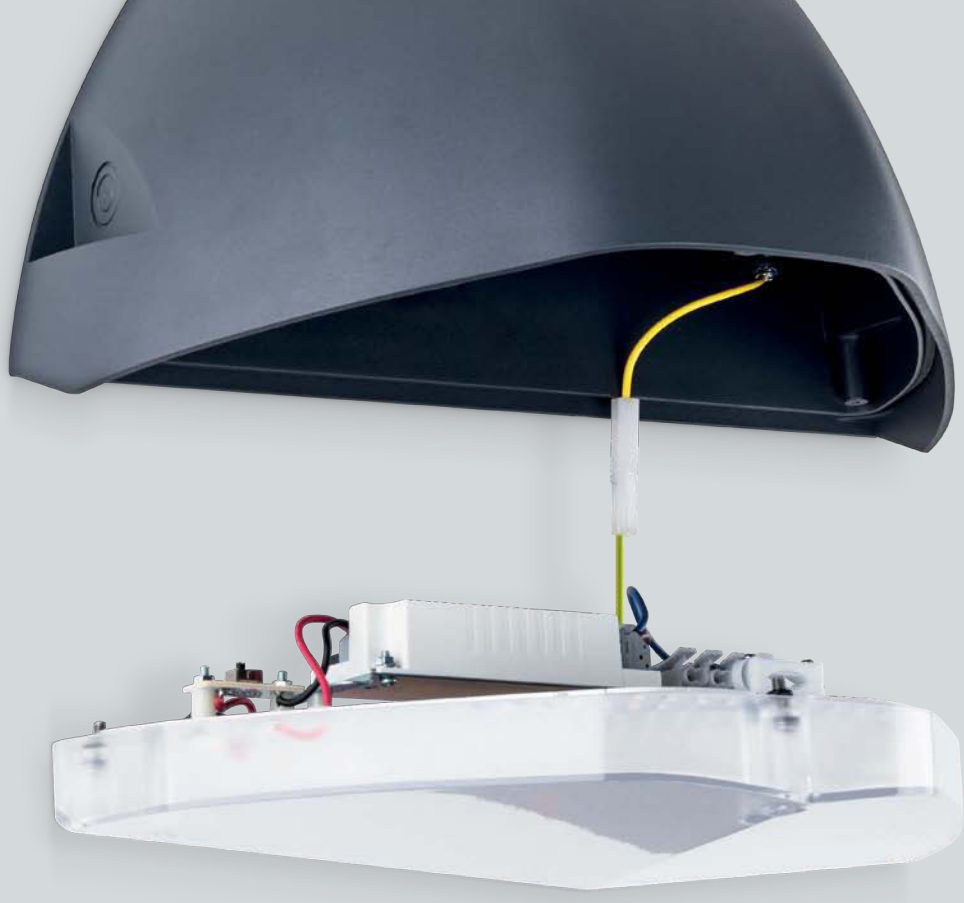

Two part body for simple termination

With a single-piece LED tray and diffuser, Novium LED Wall Pack is easy and fast to install. The secure bung connection ensures the IP65 rating is maintained.



5W

Up to 585 lumens



7W/8W/10W/12W

Up to 1550 lumens



13W/18W/28W

Up to 3500 lumens


Novium LED Wall Pack

5W

- Two colour switchable, 3000K/4000K
- Durable IK10 and IP65 rated protection
- Two part construction for simple termination
- Suitable for rear conduit entry
- Ultra efficient performance, up to 144 lpcW



IP 65 Rating | Class 1 | Colour switchable | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating



CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS	LPCW
JC**130014**	Novium LED Wall Pack	3000K/4000K	5W	585	144

Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Novium LED Wall Pack

7W / 9W / 11W / 13W

- Wattage and two colour switchable
- Durable IK10 and IP65 rated protection
- Two part construction for simple termination
- Suitable for rear & dual side conduit entry
- Ultra efficient performance, up to 144 lpcW
- Photocell options available







CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**130010**	Novium LED Wall Pack	3000K/4000K	7W/9W/11W/13W	950/1200/1400/1600
JC**130010PC**	Novium LED Wall Pack Photocell	3000K/4000K	7W/9W/11W/13W	950/1200/1400/1600
JC**130011**	Novium LED Wall Pack Emergency	3000K/4000K	7W/9W/11W/13W	950/1200/1400/1600
JC**130011PC**	Novium LED Wall Pack Photocell Emergency	3000K/4000K	7W/9W/11W/13W	950/1200/1400/1600

Body: Aluminium. **Lens:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Novium LED Wall Pack

13W / 18W / 28W

- Wattage and two colour switchable
- Durable IK10 and IP65 rated protection
- Two part construction for simple termination
- Suitable for rear & dual side conduit entry
- Ultra efficient performance, up to 144 lpcW
- Photocell options available





IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | Emergency options | Sensing options

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**130012**	Novium LED Wall Pack	3000K/4000K	13W/18W/28W	1700/2500/3500
JC**130012PC**	Novium LED Wall Pack Photocell	3000K/4000K	13W/18W/28W	1700/2500/3500
JC**130013**	Novium LED Wall Pack Emergency	3000K/4000K	13W/18W/28W	1700/2500/3500
JC**130013PC**	Novium LED Wall Pack Photocell Emergency	3000K/4000K	13W/18W/28W	1700/2500/3500


Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Polycarbonate LED Wall Pack

- Two colour switchable, 3000K/4000K
- Polycarbonate construction for resistance to corrosion
- 3 year warranty
- Suitable in environments from -10 to +40
- IP65 and IK08 protection





IP 65 Rating | Class 1 | Colour switchable | 80 CRI: Ra | 3yr Warranty* | IK 08 Rating

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**130020**	Polycarbonate LED Wall Pack	3000K/4000K	No	22W	1500	70


Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

LED Wall Pack
20W

- IP65 protection
- IK08 rated
- Photocell version available





IP 65 Rating | Class 1 | 72 CRI: Ra | 5yr Warranty* | Sensing options | 140° Beam | IK 08 Rating

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**130001**	20W LED Commercial Wall Bulkhead	4000K	No	20W	1750	87
JC**130003**	20W LED Commercial Wall Bulkhead photocell	4000K	No	20W	1750	87


Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

LED Wall Pack
30W

- IP65 protection
- IK08 rated
- Photocell version available
- Emergency version available





IP 65 Rating | Class 1 | 72 CRI: Ra | 5yr Warranty* | EM options | Sensing options | 140° Beam | IK 08 Rating

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**130004**	30W LED Commercial Wall Bulkhead	4000K	No	30W	2600	87
JC**130005**	30W LED Commercial Wall Bulkhead emergency	4000K	No	30W	2600	87
JC**130006**	30W LED Commercial Wall Bulkhead photocell	4000K	No	30W	2600	87

Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

LED Post Top
White Opal


NEW

- Three wattage selectable 20W/40W/60W
- Three colour selectable 3000K/4000K/5700K
- IP66 rated for outdoor environments
- 3-pin NEMA socket and shorting cap as standard
- Photocell options available
- Pole adaptor included as standard (60mm - 76mm)
- Finish matches our Streetlight range (pg. 280)





Photocell options available (JC**060101**)



IP 66 Rating | Class 1 | Colour switchable | Wattage switchable | 70 CRI: Ra | 5yr Warranty* | IK 09 Rating | GRY Grey | Sensing options

CODE	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**060100**	LED Post Top White Opal	No	20W/40W/60W	2400/4800/7200	120
JC**060101**	LED Post Top Photocell White Opal	No	20W/40W/60W	2400/4800/7200	120

Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

LED Post Top
White Prismatic


NEW

- Three wattage selectable 20W/40W/60W
- Three colour selectable 3000K/4000K/5700K
- IP66 rated for outdoor environments
- 3-pin NEMA socket and shorting cap as standard
- Photocell options available
- Pole adaptor included as standard (60mm - 76mm)
- Finish matches our Streetlight range (pg. 280)





^ Photocell option available (JC**060103**)



IP 66 Rating | Class 1 | Colour switchable | Wattage switchable | 70 CRI: Ra | 5yr Warranty* | IK 09 Rating | GRY Grey | Sensing options

CODE	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**060102**	LED Post Top White Prismatic	No	20W/40W/60W	3000/5750/8500	150
JC**060103**	LED Post Top Photocell White Prismatic	No	20W/40W/60W	3000/5750/8500	150

Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

NEW

LED Streetlight

Highly durable IP66 rated LED Streetlight

AVAILABLE IN 20W, 40W AND 60W



PHOTOCELL OPTION WITH 3-PIN NEMA SOCKET




ADJUSTABLE SPIGOT FOR SIDE OR COLUMN ENTRY



Streetlight
20W

- Specified by lighting designers, for lighting designers
- LED Streetlight, suitable for 60mm or 76mm spigots
- Beam angle and range approved by our internal lighting design team
- Optics specified for maximum spacing between columns
- Adjustable spigot for side or column entry
- Photocell options available (3 pin NEMA socket)
- Available in 20W, 40W and 60W
- Pre-wired 6m and 10m 3 core flex options
- IP66 as standard





IP 66 Rating | Class 1 | 72 CRI: Ra | 5yr Warranty* | Sensing options | 140° Beam

4000K	2700K	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**050100**	JC**050136**	LED Streetlight 60mm	No	20W	2900	145
JC**050101**	JC**050137**	LED Streetlight 76mm	No	20W	2900	145
JC**050102**	JC**050138**	LED Streetlight 60mm with Photocell On/Off	No	20W	2900	145
JC**050103**	JC**050139**	LED Streetlight 76mm with Photocell On/Off	No	20W	2900	145
JC**050104**	JC**050140**	LED Streetlight 60mm with 6m Flex	No	20W	2900	145
JC**050105**	JC**050141**	LED Streetlight 76mm with 6m Flex	No	20W	2900	145
JC**050106**	JC**050142**	LED Streetlight 60mm with Photocell On/Off and 6m Flex	No	20W	2900	145
JC**050107**	JC**050143**	LED Streetlight 76mm with Photocell On/Off and 6m Flex	No	20W	2900	145
JC**050108**	JC**050144**	LED Streetlight 60mm with 10m Flex	No	20W	2900	145
JC**050109**	JC**050145**	LED Streetlight 76mm with 10m Flex	No	20W	2900	145
JC**050110**	JC**050146**	LED Streetlight 60mm with Photocell On/Off and 10m Flex	No	20W	2900	145
JC**050111**	JC**050147**	LED Streetlight 76mm with Photocell On/Off and 10m Flex	No	20W	2900	145
JC**050200**	-	Streetlight 60-76mm Spigot Adapter	-	-	-	-


Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Streetlight
40W

- Specified by lighting designers, for lighting designers
- LED Streetlight, suitable for 60mm or 76mm spigots
- Beam angle and range approved by our internal lighting design team
- Optics specified for maximum spacing between columns
- Adjustable spigot for side or column entry
- Photocell options available (3 pin NEMA socket)
- Available in 20W, 40W and 60W
- Pre-wired 6m and 10m 3 core flex options
- IP66 as standard





IP 66 Rating | Class 1 | 72 CRI: Ra | 5yr Warranty* | Sensing options | 140° Beam

4000K	2700K	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**050112**	JC**050148**	LED Streetlight 60mm	No	40W	5800	145
JC**050113**	JC**050149**	LED Streetlight 76mm	No	40W	5800	145
JC**050114**	JC**050150**	LED Streetlight 60mm with Photocell On/Off	No	40W	5800	145
JC**050115**	JC**050151**	LED Streetlight 76mm with Photocell On/Off	No	40W	5800	145
JC**050116**	JC**050152**	LED Streetlight 60mm with 6m Flex	No	40W	5800	145
JC**050117**	JC**050153**	LED Streetlight 76mm with 6m Flex	No	40W	5800	145
JC**050118**	JC**050154**	LED Streetlight 60mm with Photocell On/Off and 6m Flex	No	40W	5800	145
JC**050119**	JC**050155**	LED Streetlight 76mm with Photocell On/Off and 6m Flex	No	40W	5800	145
JC**050120**	JC**050156**	LED Streetlight 60mm with 10m Flex	No	40W	5800	145
JC**050121**	JC**050157**	LED Streetlight 76mm with 10m Flex	No	40W	5800	145
JC**050122**	JC**050158**	LED Streetlight 60mm with Photocell On/Off and 10m Flex	No	40W	5800	145
JC**050123**	JC**050159**	LED Streetlight 76mm with Photocell On/Off and 10m Flex	No	40W	5800	145
JC**050200**	-	Streetlight 60-76mm Spigot Adapter	-	-	-	-


Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Streetlight
60W

- Specified by lighting designers, for lighting designers
- LED Streetlight, suitable for 60mm or 76mm spigots
- Beam angle and range approved by our internal lighting design team
- Optics specified for maximum spacing between columns
- Adjustable spigot for side or column entry
- Photocell options available (3 pin NEMA socket)
- Available in 20W, 40W and 60W
- Pre-wired 6m and 10m 3 core flex options
- IP66 as standard





IP 66 Rating | Class 1 | 72 CRI: Ra | 5yr Warranty* | Sensing options | 140° Beam

4000K	2700K	DESCRIPTION	DIM.	WATT	LUMENS	LPCW
JC**050124**	JC**050160**	LED Streetlight 60mm	No	60W	8700	145
JC**050125**	JC**050161**	LED Streetlight 76mm	No	60W	8700	145
JC**050126**	JC**050162**	LED Streetlight 60mm with Photocell On/Off	No	60W	8700	145
JC**050127**	JC**050163**	LED Streetlight 76mm with Photocell On/Off	No	60W	8700	145
JC**050128**	JC**050164**	LED Streetlight 60mm with 6m Flex	No	60W	8700	145
JC**050129**	JC**050165**	LED Streetlight 76mm with 6m Flex	No	60W	8700	145
JC**050130**	JC**050166**	LED Streetlight 60mm with Photocell On/Off and 6m Flex	No	60W	8700	145
JC**050131**	JC**050167**	LED Streetlight 76mm with Photocell On/Off and 6m Flex	No	60W	8700	145
JC**050132**	JC**050168**	LED Streetlight 60mm with 10m Flex	No	60W	8700	145
JC**050133**	JC**050169**	LED Streetlight 76mm with 10m Flex	No	60W	8700	145
JC**050134**	JC**050170**	LED Streetlight 60mm with Photocell On/Off and 10m Flex	No	60W	8700	145
JC**050135**	JC**050171**	LED Streetlight 76mm with Photocell On/Off and 10m Flex	No	60W	8700	145
JC**050200**	-	Streetlight 60-76mm Spigot Adapter	-	-	-	-

Body: Aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Emergency

EscapeLUX™ Exit Box 288

EscapeLUX™ Exit Blade Wall & Ceiling 289

EscapeLUX™ 5-in-1 Exit Blade 290

EscapeLUX™ High Output Twin Spot 9W 292

EscapeLUX™ Twin Spot 3W 293

EscapeLUX™ Twin Spot 2W 294

EscapeLUX™ Bulkhead IP66 295

EscapeLUX™ High Output Bulkhead IP66 296

EscapeLUX™ Surface-Mounted Downlight 297

EscapeLUX™ High Output Downlight IP65 298

EscapeLUX™ Spot Recessed Downlight 299

EscapeLUX™ Recessed Downlight 300

EscapeLUX™ Track Downlight 301

Emergency Remote Pack 302

NEW



EscapeLUX™ Range

Self-Test and DALI Emergency Lighting

EscapeLUX™ is a flexible, and fully compliant emergency lighting solution designed to meet the demands of commercial, industrial, and public sector environments.

LONG-LASTING LITHIUM LIFEPO4 BATTERY



SELF-TEST OPTIONS FOR AUTOMATIC TESTING



5 YEAR WARRANTY INCLUDING BATTERY





EscapeLUX™ Exit Box

See p.288



EscapeLUX™ Exit Blade

See p.289



EscapeLUX™ 5-in-1 Exit Blade

See p.290



EscapeLUX™ Twin Spot 9W

See p.292



EscapeLUX™ Twin Spot 3W & 2W

See p.293



EscapeLUX™ Bulkhead IP66

See p.295



EscapeLUX™ Bulkhead IP66

See p.296



EscapeLUX™ Surface Downlight

See p.297




EscapeLUX™ Downlight IP65

See p.298



EscapeLUX™ Recessed Downlight

See p.299



EscapeLUX™ Recessed Downlight

See p.300



EscapeLUX™ Track Downlight

See p.301

EscapeLUX™
Exit Box

NEW


- Wall or ceiling mounted
- Manual or self-test selectable on standard versions
- DALI versions available
- Maintained or non-maintained
- Black or white finish
- Exit legends included
- Lithium LiFePO4 battery with 5 year warranty





Black finish available

IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | WH White | BLK White



CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110018WH**	EscapeLUX Exit Box White	6000K	1W	200
JC**EM110018WHDALI**	EscapeLUX Exit Box White DALI	6000K	1W	20
JC**EM110018BLK**	EscapeLUX Exit Box Black	6000K	1W	200
JC**EM110018BLKDALI**	EscapeLUX Exit Box Black DALI	6000K	1W	20

Body: Painted Steel. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™
Exit Blade Wall & Ceiling


NEW

- Manual or self-test selectable on standard versions
- DALI versions available
- Maintained or non-maintained
- Black or white finish
- Exit legends included
- Lithium LiFePO4 battery with 5 year warranty





Black finish available



IP 20 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | WH White | BLK Black

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110020WH**	EscapeLUX Exit Blade White	6000K	0.7W	20
JC**EM110020BLK**	EscapeLUX Exit Blade Black	6000K	0.7W	20
JC**EM110020BLKDALI**	EscapeLUX Exit Blade Black DALI	6000K	0.7W	20
JC**EM110020SPR**	EscapeLUX Exit Blade Spare Legends			
JC**EM110022WHR***	EscapeLUX Exit Blade Recessing Kit White			
JC**EM110022WHF***	EscapeLUX Exit Blade Wall Flag Kit White			
JC**EM110022WHS***	EscapeLUX Exit Blade Suspension Kit White			
JC**EM110022BLKR***	EscapeLUX Exit Blade Recessing Kit Black			
JC**EM110022BLKF***	EscapeLUX Exit Blade Wall Flag Kit Black			
JC**EM110022BLKS***	EscapeLUX Exit Blade Suspension Kit Black			

*For use with standard exit blade, not compatible with DALI versions.
Body: Polycarbonate. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

NEW



EscapeLUX™ 5-in-1 Exit Blade

Flexible exit blade with five mounting methods

1. CEILING MOUNTED



2. FLAG MOUNTED



3. RECESSED



4. SUSPENDED



5. WALL MOUNTED



EscapeLUX™
5-in-1 Exit Blade

NEW

- Manual or self-test selectable on standard versions
- Recessed, surface mount, flag mount, and suspension kit included
- DALI versions available
- Maintained or non-maintained
- Black or white finish
- Exit legends included
- Lithium LiFePO4 battery with 5 year warranty



Flag Mounted



Surface Mounted Wall




Recessed



Surface Mounted Suspended



Surface Mounted Ceiling



IP 20 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | WH White | BLK Black

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110021WH**	EscapeLUX 5-in-1 Exit Blade White	6000K	0.7W	20
JC**EM110021WHDALI**	EscapeLUX 5-in-1 Exit Blade White DALI	6000K	0.7W	20
JC**EM110021BLK**	EscapeLUX 5-in-1 Exit Blade Black	6000K	0.7W	20
JC**EM110020SPR**	EscapeLUX 5-in-1 Exit Blade Spare Legends			
JC**EM110022WHR***	EscapeLUX Exit Blade Recessing Kit White			
JC**EM110022WHF***	EscapeLUX Exit Blade Wall Flag Kit White			
JC**EM110022WHS***	EscapeLUX Exit Blade Suspension Kit White			
JC**EM110022BLKR***	EscapeLUX Exit Blade Recessing Kit Black			
JC**EM110022BLKF***	EscapeLUX Exit Blade Wall Flag Kit Black			
JC**EM110022BLKS***	EscapeLUX Exit Blade Suspension Kit Black			

*For use with standard exit blade, not compatible with DALI versions.
Body: Polycarbonate. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

NEW

EscapeLUX™
High Output Twin Spot 9W


- Manual or self-test selectable on standard versions
- 9W high output
- IP65 dustproof and water-resistant
- Non-maintained
- Black or white finish
- Lithium LiFePO4 battery with 5 year warranty





Black finish available

IP 65 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | WH White | BLK Black



CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110010WH**	EscapeLUX Twin Spot White	6000K	9W	1000
JC**EM110010BLK**	EscapeLUX Twin Spot Black	6000K	9W	1000

Body: Polycarbonate. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™
Twin Spot 3W

NEW


- Manual or self-test selectable on standard versions
- DALI version available
- IP65 dustproof and water-resistant
- Non-maintained
- Black or white finish
- Lithium LiFePO4 battery with 5 year warranty





Black finish available

IP 65 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | WH White | BLK Black



CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110011WH**	EscapeLUX Twin Spot White	6000K	3W	450
JC**EM110011WHDALI**	EscapeLUX Twin Spot White DALI	6000K	3W	250
JC**EM110011BLK**	EscapeLUX Twin Spot Black	6000K	3W	450
JC**EM110011BLKDALI**	EscapeLUX Twin Spot White DALI	6000K	3W	250

Body: Polycarbonate. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™
Twin Spot 2W

NEW


- Manual or self-test selectable on standard versions
- IP65 dustproof and water-resistant
- Non-maintained
- Black or white finish
- Lithium LiFePO4 battery with 5 year warranty





Black finish available

IP65 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | WH White | BLK Black



CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110012WH**	EscapeLUX Twin Spot White	6000K	2W	300
JC**EM110012BLK**	EscapeLUX Twin Spot Black	6000K	2W	300

Body: Polycarbonate. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™
Bulkhead IP66


NEW

- Manual or self-test selectable on standard versions
- Four way conduit entry with BESA mounting
- DALI versions available
- Maintained or non-maintained
- Black or white finish
- Exit legends included
- Lithium LiFePO4 battery with 5 year warranty





Black finish available



IP 66 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | WH White | BLK Black

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110016WH**	EscapeLUX Bulkhead White	6000K	1.6W	300
JC**EM110016WHDALI**	EscapeLUX Bulkhead White DALI	6000K	1.6W	150
JC**EM110016BLK**	EscapeLUX Bulkhead Black	6000K	1.6W	300
JC**EM110016BLKDALI**	EscapeLUX Bulkhead Black DALI	6000K	1.6W	150
JC**EM110017WH**	EscapeLUX Bulkhead White	6000K	1W	150
JC**EM110017BLK**	EscapeLUX Bulkhead Black	6000K	1W	150

Body: ABS. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™
High Output Bulkhead IP66


NEW

- Manual or self-test selectable on standard versions
- Wattage selectable
- Non maintained
- Four way conduit entry with BESA mounting
- DALI versions available
- Black or white finish
- IP66 protection
- Lithium LiFePO4 battery with 5 year warranty





Black finish available



IP 66 **Rating** | Class 2 | **Class 2** | **Wattage switchable** | 80 **CRI: Ra** | 5yr **Warranty*** | IK 08 **Rating** | WH **White** | BLK **Black**

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110015WH**	EscapeLUX Bulkhead White	6000K	6.5W/10W	1000/1500
JC**EM110015WHDALI**	EscapeLUX Bulkhead White DALI	6000K	5W/10W	500
JC**EM110015BLK**	EscapeLUX Bulkhead Black	6000K	6.5W/10W	1000/1500
JC**EM110015BLKDALI**	EscapeLUX Bulkhead Black DALI	6000K	5W/10W	500

Body: ABS. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™
Surface-Mounted Downlight


NEW

- Manual or self-test selectable on standard versions
- Non maintained
- DALI versions available
- Black or white finish
- Lithium LiFePO4 battery with 5 year warranty





Black finish available



IP 65 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | WH White | BLK Black

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110023WH**	EscapeLUX Surface Downlight White	6000K	2W	280
JC**EM110023WHDALI**	EscapeLUX Surface Downlight White DALI	6000K	2W	200
JC**EM110023BLK**	EscapeLUX Surface Downlight Black	6000K	2W	280
JC**EM110023BLKDALI**	EscapeLUX Surface Downlight Black DALI	6000K	2W	200

Body: Polycarbonate. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™
High Output Downlight IP65


NEW

- Manual or self-test selectable on standard versions
- Open area and corridor options available
- Non maintained
- DALI versions available
- Black or white finish
- Lithium LiFePO4 battery with 5 year warranty





Black finish available



Cut-out: Ø44mm

IP65 Rating | Class 2 | 80 CRI: Ra | 5yr Warranty* | 170° Beam (open area) | 160°/65° Beam (corridor) | WH White | BLK Black

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110024WH/C**	EscapeLUX Downlight White Corridor	6000K	3W	500
JC**EM110024WH/OA**	EscapeLUX Downlight White Open Area	6000K	3W	500
JC**EM110024WHDALI/C**	EscapeLUX Downlight White Corridor DALI	6000K	3W	280
JC**EM110024WHDALI/OA**	EscapeLUX Downlight White Open Area DALI	6000K	3W	300
JC**EM110024BLK/C**	EscapeLUX Downlight Black Corridor	6000K	3W	500
JC**EM110024BLK/OA**	EscapeLUX Downlight Black Open Area	6000K	3W	500
JC**EM110024BLKDALI/C**	EscapeLUX Downlight Black Corridor DALI	6000K	3W	280
JC**EM110024BLKDALI/OA**	EscapeLUX Downlight Black Open Area DALI	6000K	3W	300
JC**EM110025WH/C**	EscapeLUX Downlight White Corridor	6000K	2W	280
JC**EM110025WH/OA**	EscapeLUX Downlight White Open Area	6000K	2W	280
JC**EM110025BLK/C**	EscapeLUX Downlight Black Corridor	6000K	2W	280
JC**EM110025BLK/OA**	EscapeLUX Downlight Black Open Area	6000K	2W	280

Body: Polycarbonate. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

NEW


EscapeLUX™
Spot Recessed Downlight

- Self-test option available
- Open area lens as standard, corridor lens included
- White or black options
- Lithium LiFePO4 battery with 5 year warranty
- Redesigned green indicator minimises glare while maintaining visibility for testing





Black finish available



Cut-out: Ø44mm

IP 20 Rating | Class 2 | 74 CRI: Ra | 165° Beam (open area) | 160° / 65° Beam (corridor) | 5yr Warranty* | WH White | BLK Black

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110027WH**	EscapeLUX Downlight White Open Area/Corridor	6000K	1W	140
JC**EM110027WHST**	EscapeLUX Downlight White Open Area/Corridor Self-Test	6000K	1W	140
JC**EM110027BLK**	EscapeLUX Downlight Black Open Area/Corridor	6000K	1W	140
JC**EM110027BLKST**	EscapeLUX Downlight Black Open Area/Corridor Self-Test	6000K	1W	140


Body: Polycarbonate. **Lens:** Polycarbonate. **Bezel:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™
Recessed Downlight

- Ideal for emergency lighting in offices, open areas and corridors
- Manual or self-test selectable on standard versions
- 2W total wattage recessed LED downlight
- Non-maintained 3 hour minimum battery supply
- Open area as standard, optional corridor lens included
- Lithium-iron LifePO4 battery technology for improved performance





Cut-out: Ø75-85mm

IP 20 Rating | Class 2 | 74 CRI: Ra | 5yr Warranty* | 140° Beam (open area) | 160° 65° Beam (corridor) | WH White

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS DC (OPEN AREA)	LUMENS (CORRIDOR)
JC**110006**	EscapeLUX Recessed LED Downlight Manual Test	6000K	2W	158	123
JC**110007**	EscapeLUX Recessed LED Downlight Self-Test	6000K	2W	158	123

Body: Polycarbonate. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

EscapeLUX™ Three Circuit
Emergency Track Downlight

NEW

- Manual or self-test selectable on standard versions
- 1.6W track downlight
- Lithium-iron LifePO4 battery technology for improved performance
- For use with Three Circuit Track see p.332


JC**EM110028WH**



JC**EM110028BLK**



IP 20 **Rating** | Class 2 | 5yr **Warranty*** | WH **White** | BLK **Black**



CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110028WH**	EscapeLUX Track Downlight White	6000K	1.6W	250
JC**EM110028BLK**	EscapeLUX Track Downlight Black	6000K	1.6W	250


Body: Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Scan QR code for installation video

Emergency Remote Pack

Designed for simple emergency conversion








Double Hinged Terminal Cover

Double hinged terminal cover allows for clearer access to terminal blocks, whilst a clear cover provides reassurance of secure termination.



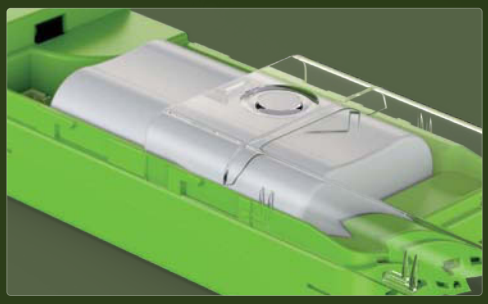



Lithium LifePO4 Battery

For improved performance and battery life lasting up to five times longer than traditional Nicd batteries, with a slide out cover for simple replacement.


5 year warranty inc. Battery


For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Emergency Remote Pack

- Lithium LifePO4 battery for improved performance
- Double hinged terminal cover for clearer access to terminal blocks
- Slide out battery cover
- Colour coded terminals for clear cable allocation
- Slimline construction
- Ratchet clamp design for secure strain relief on cables
- Class II with earth provision for continuous wiring requirements
- Push fit loop in/loop out connections
- Plug and play molex DC connectors





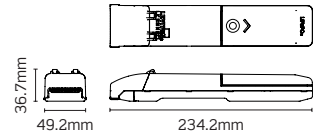

CODE	DESCRIPTION	VOLTAGE	WATT
JC**EM002**	Emergency Remote Pack	9 - 75V DC	2W Max
JC**EM002ST**	Emergency Remote Pack Self-Test	9 - 75V DC	2W Max
JC**EM002DALI**	DALI Addressable Emergency Remote Pack	12 - 60V DC	2W Max
JC**EM002/50**	Emergency Remote Pack **for use with V50**	9 - 75V DC	2W Max
JC**EM002/50ST**	Emergency Remote Pack Self-Test **for use with V50**	9 - 75V DC	2W Max

Body: Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

After visiting JCC to provide feedback, the product team brought us a prototype to get our input. It really shows their commitment to getting the products just right.

SHANE MUNDAY

Sendit Electrical



Scan QR for electrician video


Spotlights & Track Systems

Starspot™ Single Circuit	310
Starspot™ Three Circuit	318
Starspot™ GU10 Single Circuit	326
Starspot™ GU10 Three Circuit	328
Single Circuit Track	330
Three Circuit Track	332
EscapeLUX™ Track Downlight	333

Starspot™

Comprehensive track and spot range for single and three circuit track








Broad lumen output range

Broad output options available from 1100 up to 4100 lumen output across the range.

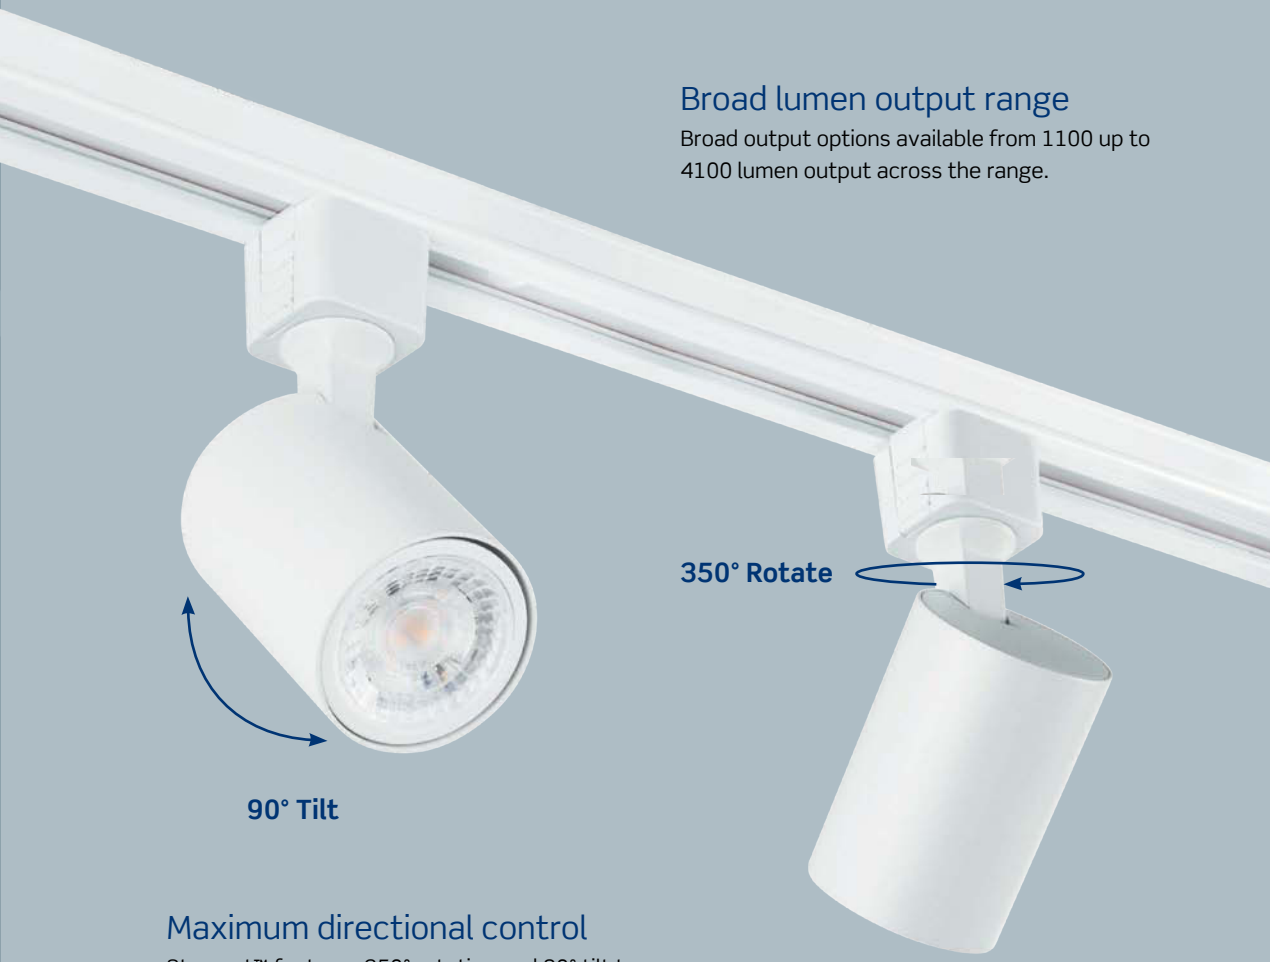

Maximum directional control

Starspot™ features 350° rotation and 90° tilt to illuminate specific features and hard to reach spots, making it the ideal choice for task or accent lighting.



Single & three circuit options

The Starspot™ range includes options for use with both single circuit or three circuit track to suit a variety of installation requirements. Available in black and white finishes.



Ideal for retail applications

All Starspot™ fittings provide a typical CRI (colour rendering index) of 85 and ensure true colour representation throughout their life, making Starspot™ ideal for retail displays.


Starspot™ Single Circuit
7.5W White

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.326
- 350° rotate and 90° tilt

JC**014232**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**014232**	Starspot Single Circuit Triac Dim 35° beam angle	4000K	Yes	7.5W	1100	130
JC**014234**	Starspot Single Circuit Triac Dim 35° beam angle	3000K	Yes	7.5W	1100	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with single circuit track (sold separately), see p.330.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Single Circuit
7.5W Black

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.326
- 350° rotate and 90° tilt

JC**014233**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | BLK Black



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**014233**	Starspot Single Circuit Triac Dim 35° beam angle	4000K	Yes	7.5W	1100	130
JC**014235**	Starspot Single Circuit Triac Dim 35° beam angle	3000K	Yes	7.5W	1100	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with single circuit track (sold separately), see p.330.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Single Circuit
13W White

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.326
- 350° rotate and 90° tilt

JC**014236**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**014236**	Starspot Single Circuit Non-Dim 35° beam angle	4000K	No	13W	1800	130
JC**014238**	Starspot Single Circuit Non-Dim 35° beam angle	3000K	No	13W	1800	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with single circuit track (sold separately), see p.330.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Single Circuit
13W Black

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.326
- 350° rotate and 90° tilt

JC**014237**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | BLK Black



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**014237**	Starspot Single Circuit Non-Dim 35° beam angle	4000K	No	13W	1800	130
JC**014239**	Starspot Single Circuit Non-Dim 35° beam angle	3000K	No	13W	1800	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with single circuit track (sold separately), see p.330.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Single Circuit
21.5W White

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.326
- 350° rotate and 90° tilt

JC**014240**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**014240**	Starspot Single Circuit Non-Dim 35° beam angle	4000K	No	21.5W	2900	130
JC**014242**	Starspot Single Circuit Non-Dim 35° beam angle	3000K	No	21.5W	2900	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with single circuit track (sold separately), see p.330.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Single Circuit
21.5W Black

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.326
- 350° rotate and 90° tilt

JC**014241**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | BLK Black



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**014241**	Starspot Single Circuit Non-Dim 35° beam angle	4000K	No	21.5W	2900	130
JC**014243**	Starspot Single Circuit Non-Dim 35° beam angle	3000K	No	21.5W	2900	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with single circuit track (sold separately), see p.330.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Starspot™ Single Circuit
32.5W White

- Single and three circuit track options
- 15° and 35° beam angle options
- GU10 options also available, see p.326
- 350° rotate and 90° tilt

JC**014244**





IP 20 **Rating** | **Class 1** | 80 **CRI: Ra** | 5yr **Warranty*** | **Beam options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**014244**	Starspot Single Circuit Non-Dim 35° beam angle	4000K	No	32.5W	4100	125
JC**014246**	Starspot Single Circuit Non-Dim 35° beam angle	3000K	No	32.5W	4100	125
JC**014248**	Starspot Single Circuit Non-Dim 15° beam angle	4000K	No	32.5W	4100	125
JC**014250**	Starspot Single Circuit Non-Dim 15° beam angle	3000K	No	32.5W	4100	125

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with single circuit track (sold separately), see p.330.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Starspot™ Single Circuit
32.5W Black

- Single and three circuit track options
- 15° and 35° beam angle options
- GU10 options also available, see p.326
- 350° rotate and 90° tilt

JC**014245**





IP 20 **Rating** | **Class 1** | 80 **CRI: Ra** | 5yr **Warranty*** | **Beam options** | BLK **Black**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**014245**	Starspot Single Circuit Non-Dim 35° beam angle	4000K	No	32.5W	4100	125
JC**014247**	Starspot Single Circuit Non-Dim 35° beam angle	3000K	No	32.5W	4100	125
JC**014249**	Starspot Single Circuit Non-Dim 35° beam angle	4000K	No	32.5W	4100	125
JC**014251**	Starspot Single Circuit Non-Dim 35° beam angle	3000K	No	32.5W	4100	125

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with single circuit track (sold separately), see p.330.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Three Circuit
7.5W White

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.328
- 350° rotate and 90° tilt

JC**088122**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**088122**	Starspot Three Circuit Triac Dim 35° beam angle	4000K	Yes	7.5W	1100	130
JC**088124**	Starspot Three Circuit Triac Dim 35° beam angle	3000K	Yes	7.5W	1100	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with three circuit track (sold separately), see p.332.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Three Circuit
7.5W Black

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.328
- 350° rotate and 90° tilt

JC**088123**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | BLK Black



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**088123**	Starspot Three Circuit Triac Dim 35° beam angle	4000K	Yes	7.5W	1100	130
JC**088125**	Starspot Three Circuit Triac Dim 35° beam angle	3000K	Yes	7.5W	1100	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with three circuit track (sold separately), see p.332.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Three Circuit
13W White

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.328
- 350° rotate and 90° tilt

JC**088126**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**088126**	Starspot Three Circuit Non-Dim 35° beam angle	4000K	No	13W	1800	130
JC**088128**	Starspot Three Circuit Non-Dim 35° beam angle	3000K	No	13W	1800	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with three circuit track (sold separately), see p.332.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Three Circuit
13W Black

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.328
- 350° rotate and 90° tilt

JC**088127**







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**088127**	Starspot Three Circuit Non-Dim 35° beam angle	4000K	No	13W	1800	130
JC**088129**	Starspot Three Circuit Non-Dim 35° beam angle	3000K	No	13W	1800	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with three circuit track (sold separately), see p.332.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Three Circuit
21.5W White

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.328
- 350° rotate and 90° tilt

JC**088130**



IP 20 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 35° Beam | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**088130**	Starspot Three Circuit Non-Dim 35° beam angle	4000K	No	21.5W	2900	130
JC**088132**	Starspot Three Circuit Non-Dim 35° beam angle	3000K	No	21.5W	2900	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with three circuit track (sold separately), see p.332.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Three Circuit
21.5W Black

- Single and three circuit track options
- 35° beam angle
- GU10 options also available, see p.328
- 350° rotate and 90° tilt

JC**088131**







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**088131**	Starspot Three Circuit Non-Dim 35° beam angle	4000K	No	21.5W	2900	130
JC**088133**	Starspot Three Circuit Non-Dim 35° beam angle	3000K	No	21.5W	2900	130

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with three circuit track (sold separately), see p.332.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Starspot™ Three Circuit
32.5W White

- Single and three circuit track options
- 15° and 35° beam angle options
- GU10 options also available, see p.328
- 350° rotate and 90° tilt

JC**088134**





IP 20 **Rating** | **Class 1** | 80 **CRI: Ra** | 5yr **Warranty*** | **Beam options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**088134**	Starspot Three Circuit Non-Dim 35° beam angle	4000K	No	32.5W	4100	125
JC**088136**	Starspot Three Circuit Non-Dim 35° beam angle	3000K	No	32.5W	4100	125
JC**088138**	Starspot Three Circuit Non-Dim 15° beam angle	4000K	No	32.5W	4100	125
JC**088140**	Starspot Three Circuit Non-Dim 15° beam angle	3000K	No	32.5W	4100	125

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with three circuit track (sold separately), see p.332.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Starspot™ Three Circuit
32.5W Black

- Single and three circuit track options
- 15° and 35° beam angle options
- GU10 options also available, see p.328
- 350° rotate and 90° tilt

JC**088135**





IP 20 **Rating** | **Class 1** | 80 **CRI: Ra** | 5yr **Warranty*** | **Beam options** | BLK **Black**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**088135**	Starspot Three Circuit Non-Dim 35° beam angle	4000K	No	32.5W	4100	125
JC**088137**	Starspot Three Circuit Non-Dim 35° beam angle	3000K	No	32.5W	4100	125
JC**088139**	Starspot Three Circuit Non-Dim 35° beam angle	4000K	No	32.5W	4100	125
JC**088141**	Starspot Three Circuit Non-Dim 35° beam angle	3000K	No	32.5W	4100	125

Body: Aluminium. **Lens:** Polycarbonate.
Method of fix: For use with three circuit track (sold separately), see p.332.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Starspot™ Single Circuit
GU10 White


- Single and three circuit track options
- Integrated LED options also available, see p.310
- 350° rotate and 90° tilt

JC**014230**





Rating | Class 1 | Warranty* | Lamp not supplied | White



CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**014230**	Starspot GU10 Single Circuit White	GU10 7W LED Max

Body: Aluminium.
Method of fix: For use with single circuit track (sold separately), see p.330.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Starspot™ Single Circuit
GU10 Black


- Single and three circuit track options
- Integrated LED options also available, see p.310
- 350° rotate and 90° tilt

JC**014231**





Rating | Class 1 | Warranty* | Lamp not supplied | Black



CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**014231**	Starspot GU10 Single Circuit Black	GU10 7W LED Max

Body: Aluminium.
Method of fix: For use with single circuit track (sold separately), see p.330.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Starspot™ Three Circuit
GU10 White


- Single and three circuit track options
- Integrated LED options also available, see p.318
- 350° rotate and 90° tilt

JC**088120**





Rating | Class 1 | Warranty* | Lamp not supplied | White



CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**088120**	Starspot GU10 Three Circuit White	GU10 7W LED Max

Body: Aluminium.
Method of fix: For use with three circuit track (sold separately), see p.332.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Starspot™ Three Circuit
GU10 Black

- Single and three circuit track options
- Integrated LED options also available, see p.318
- 350° rotate and 90° tilt

JC**088121**



IP 20 Rating | Class 1 | 5yr Warranty* | Lamp not supplied | BLK Black



CODE	DESCRIPTION	LAMP (NOT INCLUDED)
JC**088121**	Starspot GU10 Three Circuit Black	GU10 7W LED Max

Body: Aluminium.
Method of fix: For use with three circuit track (sold separately), see p.332.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Single Circuit Track

- Compatible with all JCC Single Circuit spotlights
- Track can be cut to required length
- Supplied with end caps (3mm)
- 16 Amp max


JC**140001WH** (510MM)



JC**140002BLK** (1120MM)



IP 20 Rating | Class 1 | 3yr Warranty* | WH White | BLK Black




CODE	DESCRIPTION
JC**14001**	Single Circuit Track 510mm track section
JC**14002**	Single Circuit Track 1120mm track section
JC**14003**	Single Circuit Track 2340mm track section

For Black add **BLK** suffix, for White add **WH** suffix.
Body: Steel. | Supplied with end caps (3mm).

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Single Circuit Track
Accessories

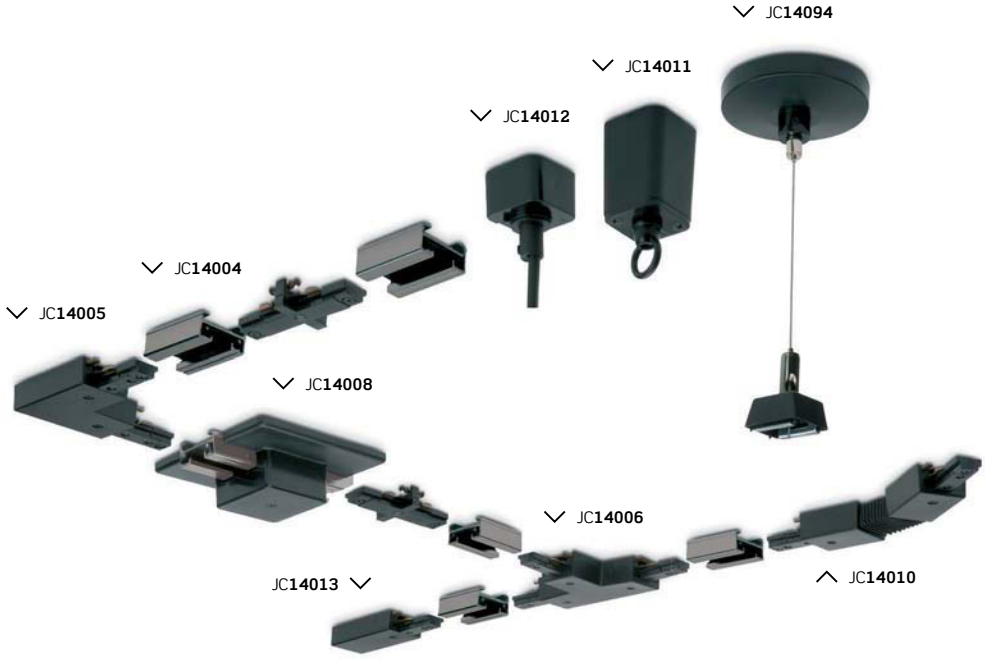





IP 20 Rating | Class 1 | 3yr Warranty* | WH White | BLK Black

CODE	DESCRIPTION
JC**14004**	Track connector with power
JC**14005**	Adjustable right angle (L) & straight connector with power feed
JC**14006**	T connector
JC**14007WH**	4-way track connector (white)
JC**14008**	Power feed for track centre
JC**14009**	Power feed at track end with conduit entry
JC**14010**	Flexible connector
JC**14011**	Adapter to suspend pendants from track (5amp max)
JC**14012**	Adapter to provide power from track to pendants etc (1m flex - 5amp max)
JC**14013**	Power feed at track end
JC**14070**	Surface adapter for mainline fittings
JC**14093**	Suspension kit for suspended ceilings (3m)
JC**14094**	Wire suspension kit (3m)

For Black add **BLK** suffix, for White add **WH** suffix.
Body: Aluminium. **Cover:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Three Circuit Track


- 16 Amp max per circuit

JC**88103WH**



JC**88103BLK**





IP 20 **Rating** | Class 1 | 3yr **Warranty*** | WH **White** | BLK **Black**

CODE	DESCRIPTION
JC**88103**	3m track section

For Black add **BLK** suffix, for White add **WH** suffix.
Body: Aluminium. | Suitable for use with Three Circuit Track adapter JC**88118**.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

EscapeLUX™ Three Circuit
Emergency Track Downlight

NEW

- Manual or self-test selectable on standard versions
- 1.6W track downlight
- Lithium-iron LifePO4 battery technology for improved performance


JC**EM110028WH**



JC**EM110028BLK**



IP 20 **Rating** | Class 2 | 5yr **Warranty*** | WH **White** | BLK **Black**




CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS
JC**EM110028WH**	EscapeLUX Track Downlight White	6000K	1.6W	250
JC**EM110028BLK**	EscapeLUX Track Downlight Black	6000K	1.6W	250

Body: Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

Three Circuit Track
Accessories

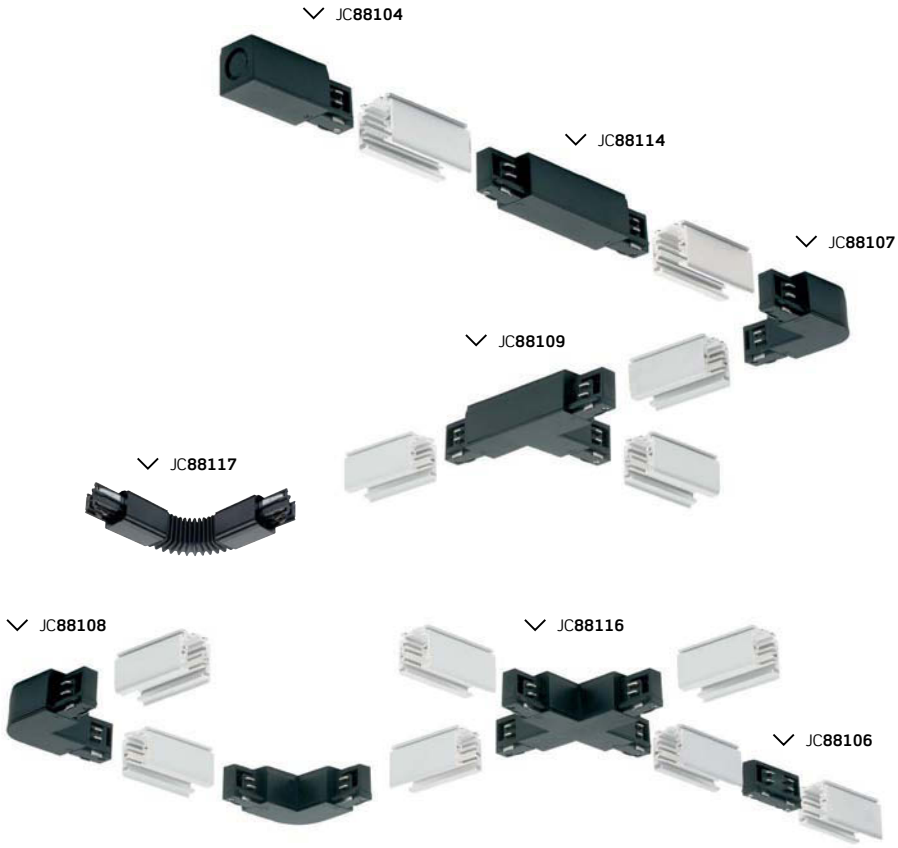

IP 20 Rating | Class 1 | 3yr Warranty* | WH White | BLK Black

Convert any single circuit spotlight to three circuit with track adapter JC**88118** (one per fitting).



CODE	DESCRIPTION
JC**88104**	Power feed - right
JC**88105**	Power feed - left
JC**88106**	Concealed track connector
JC**88107**	L connector - right sided earth
JC**88108**	L connector - left sided earth
JC**88109**	T connector - right sided earth
JC**88110**	T connector - left sided earth

CODE	DESCRIPTION
JC**88112**	End cap
JC**88114**	Track connector with power feed
JC**88115**	Wire suspension kit† 1.5m
JC**88116**	X connector - left sided earth
JC**88117**	Flexible elbow connector
JC**88118**	Mainline single circuit to three circuit track adapter

For Black add **BLK** suffix, for White add **WH** suffix. †Only available in White (**WH**) (one per fitting).
Body: Aluminium.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


SHORE
SHORE
SHORE
SHORE
SHORE
SHORE
CHANNEL ISLANDS
N. MERRICK

LED Strip

LED Strip Options	338
LED Strip IP20	340
LED Strip IP65	341
RGBW Controllers	344
RGBW LED Strip IP20	348
RGBW LED Strip IP65	349
COB LED Strip 50mm Cut Points	352
COB LED Strip Free Cut	353
COB LED Strip Connectors	354
Aluminium Profile	356
LED Strip Drivers	357
LED Strip Connectors & Accessories	358
LED Strip Corners	359
LED Strip Configurator	360
LED Undercabinet	362


LED Strip

Customisable LED Strip to suit all applications


MULTIPLE REEL LENGTH OPTIONS



50MM CUT POINTS & FREE CUT OPTIONS



COB OPTIONS FOR PERFECT UNIFORMITY

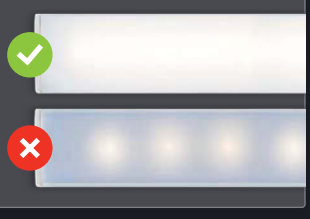

SINGLE COLOUR



4.8W per metre

For subtle accent or back lighting around mirrors or under cabinets.



9.6W per metre

For greater accent lighting such as in living rooms and bedrooms.



14.4W per metre

Functional lighting from higher ceilings, pelmets and corridors.

RGBW



7.2W per metre

For subtle accent or back lighting around mirrors or under cabinets.



17.6W per metre

Functional lighting from higher ceilings, pelmets and corridors.

COLOUR TEMPS



3000K Warm White

Ideal for creating a warm and comfortable living environment.



4000K Neutral White

Ideal for kitchens or bathrooms, replacing traditional fluorescents.



RGBW

Select or blend red, green, blue & white to create a variety of colours.

IP RATINGS



IP20 (Dry areas)


Suitable for use in dry areas with no exposure to moisture.



IP65 (Wet areas)

Suitable for use in wet areas, protection against dust & moisture.

ACCESSORIES

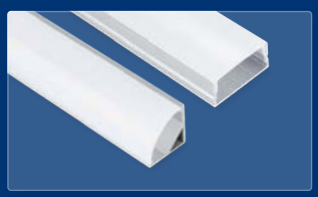

Aluminium profile

Surface mounted, recessed, slim, corner & plaster-in options.



LED Drivers

Providing greater flexibility for any LED Strip installation.



Dimming options


Non-dimmable or triac dimmable options with correct driver.

LED Strip
IP20

- Continuous reel of LED strip
- 120 LEDs per metre for an even light distribution
- Cut to required length at 50mm cut points ensuring a more accurate installation
- Available with triac dimmable and non-dimmable 24V drivers, see p.357
- Aluminium profile options, see p.356



IP20 Rating | Class 3 | 80 CRI: Ra | 3yr Warranty* | Dimmable options | 24V



5M REEL	10M REEL	20M REEL	30M REEL	40M REEL	50M REEL	DESCRIPTION	WATT	LUMENS†
JC**121268**	JC**121400**	JC**121404**	JC**121408**	JC**121412**	JC**121300**	LED Strip Reel IP20 3000K	4.8W	480
JC**121269**	JC**121402**	JC**121406**	JC**121410**	JC**121414**	JC**121301**	LED Strip Reel IP20 4000K	4.8W	480
JC**121272**	JC**121416**	JC**121420**	JC**121424**	JC**121428**	JC**121304**	LED Strip Reel IP20 3000K	9.6W	960
JC**121273**	JC**121418**	JC**121422**	JC**121426**	JC**121430**	JC**121305**	LED Strip Reel IP20 4000K	9.6W	960
JC**121276**	JC**121432**	JC**121436**	JC**121440**	JC**121444**	JC**121308**	LED Strip Reel IP20 3000K	14.4W	1440
JC**121277**	JC**121434**	JC**121438**	JC**121442**	JC**121446**	JC**121309**	LED Strip Reel IP20 4000K	14.4W	1440

All strip dimmable with correct driver see p.357 (sold separately). | †Lumens stated are per metre.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

LED Strip
IP65

- Continuous reel of LED strip
- 120 LEDs per metre for an even light distribution
- Cut to required length at 50mm cut points ensuring a more accurate installation
- Available with triac dimmable and non-dimmable 24V drivers, see p.357
- Aluminium profile options, see p.356



IP65 Rating | Class 3 | 80 CRI: Ra | 3yr Warranty* | Dimmable options | 24V



5M REEL	10M REEL	20M REEL	30M REEL	40M REEL	50M REEL	DESCRIPTION	WATT	LUMENS†
JC**121284**	JC**121401**	JC**121405**	JC**121409**	JC**121413**	JC**121316**	LED Strip Reel IP65 3000K	4.8W	480
JC**121285**	JC**121403**	JC**121407**	JC**121411**	JC**121415**	JC**121317**	LED Strip Reel IP65 4000K	4.8W	480
JC**121288**	JC**121417**	JC**121421**	JC**121425**	JC**121429**	JC**121320**	LED Strip Reel IP65 3000K	9.6W	960
JC**121289**	JC**121419**	JC**121423**	JC**121427**	JC**121431**	JC**121321**	LED Strip Reel IP65 4000K	9.6W	960
JC**121292**	JC**121433**	JC**121437**	JC**121441**	JC**121445**	JC**121324**	LED Strip Reel IP65 3000K	14.4W	1440
JC**121293**	JC**121435**	JC**121439**	JC**121443**	JC**121447**	JC**121325**	LED Strip Reel IP65 4000K	14.4W	1440

All strip dimmable with correct driver see p.357 (sold separately). | †Lumens stated are per metre.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.






Scan QR code for installation video

RGBW Controllers

Bring colour and control to your installation

EASY TO SET UP & PAIR



CONTROL LED STRIP FROM UP TO 30M AWAY



CONTROL SPECIFIC AREAS WITHIN A ROOM



Bring colour and control to your installation

Our new LED Remotes & Receivers range offers the best solutions for your RGBW applications. A flexible and easy to use Wall Mounted Control and Hand Held Remote Control can be used to operate all types of RGBW lighting. This includes RGB colour changing, and White colour temperature dimming and dynamic mode selection - all from the same remote.

ZONES
Control specific areas within a room, each with their own colour & mode. Set up to 4 zones in the desired area.

GROUPING
Up to 10 receivers per zone can be grouped to a remote control (Hand Held Remote: max. 30, Wall Mounted Control: max. 40).

BUILT IN MEMORY
No loss of memory if there is a power cut or when remote is replaced.


OUT OF SIGHT CONTROL
RF signal allows control of LED strip from up to 30m away*.



JC**121449** Hand Held Remote Control



JC**121451** Wall Mounted Remote Control

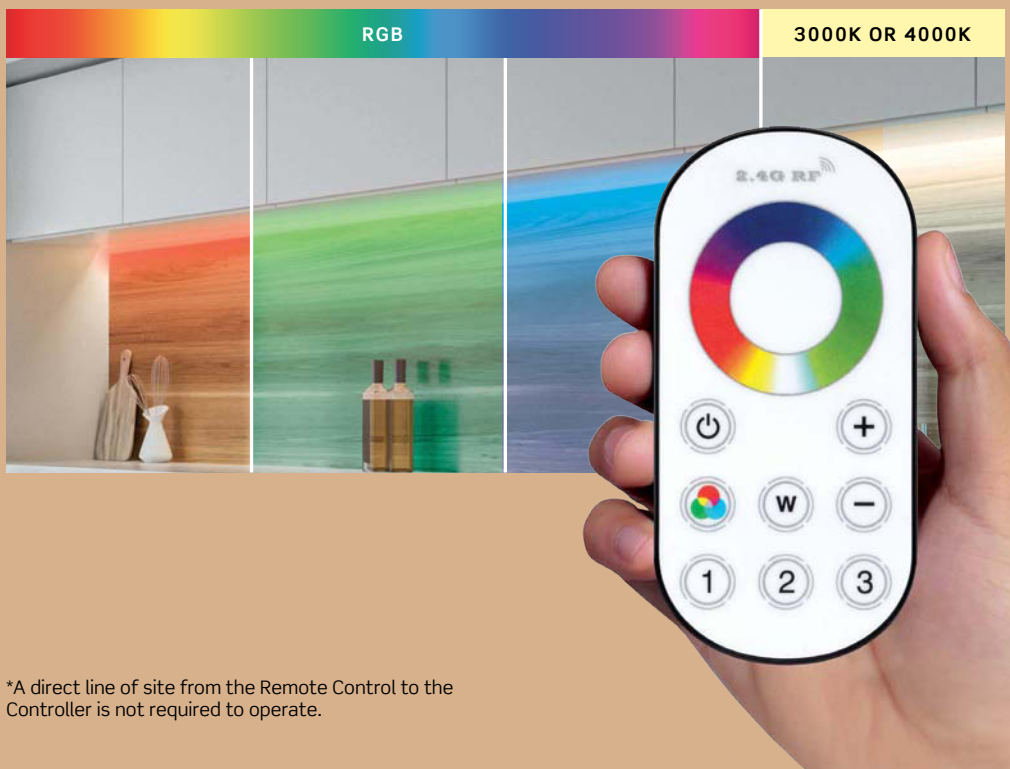

*A direct line of site from the Remote Control to the Controller is not required to operate.

RGBW 2.4GHz RF
Hand Held Remote Control

- 2.4GHz RF Hand Held Remote control suitable for all application sizes
- 2.4GHz RF allows out of sight control and grouping
- Pair up to two Hand Held Remote controls to each zone
- 3 zones, up to 30 receivers



COLOUR SELECTION
Precise RGB touch colour wheel for simple colour selection.

POWER ON/OFF
Last used settings are retained when switched off for immediate recall on next use.

PRESET MODES
10 preset scenes, including, jumping change, strobe, & fade.

BRIGHTNESS CONTROL
Brightness control for smooth dimming. Also works to change speed during dynamic mode.

WHITE OPTION
Option to mix RGB and White or Select white only. White available in 3000K and 4000K.

ZONES
3 customisable zones.

IP20 Rating

3yr Warranty*



JC**121448** RGBW 2.4G RF receiver

CODE	DESCRIPTION	WATT	DIM
JC**121449**	RGBW 2.4G RF Hand Held Remote control	-	Yes
JC**121448**	RGBW 2.4G RF LED receiver (for use with JC**121449** Hand Held Remote)	350W Max	Yes

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

RGBW 2.4GHz RF
Wall Mounted Remote Control

- 2.4GHz RF Wall Mounted Remote control suitable for all application sizes
- 2.4GHz RF allows out of sight control and grouping
- Pair up to two Wall Mounted Remote controls to each zone
- 4 zones, up to 40 receivers

BRIGHTNESS CONTROL
Brightness control for smooth dimming. Both RGB and W channels can be dimmed when manually selecting colours.


COLOUR SELECTION
Precise RGB touch colour bar for simple colour selection.

POWER ON
Turns unit on.

MODES
12 preset scenes, including, jumping change, strobe, & fade.

SPEED BUTTONS
Allow for speed customisation when a mode is selected.

WHITE OPTION
Selects the white LEDs only, available in 3000K & 4000K.

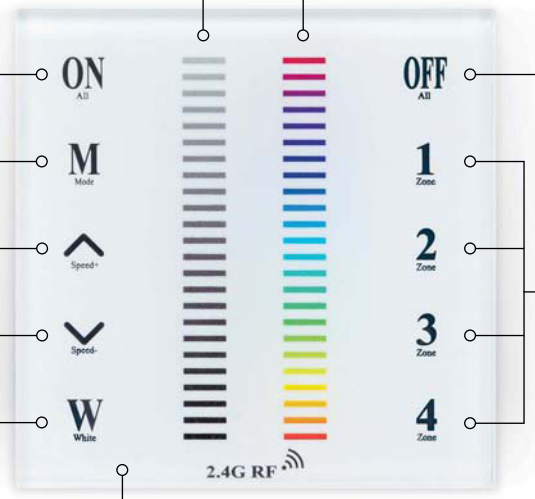

POWER OFF
Last used settings are retained when switched off for immediate recall on next use.

ZONES
4 customisable zones.

GLASS COVERING
The glass covering gives a smooth, modern appearance and is easy to wipe clean.



JC**121450** RGBW 2.4G RF receiver

IP 20 Rating

3yr Warranty*

CODE	DESCRIPTION	WATT	DIM
JC**121451**	RGBW 2.4G RF Wall Mounted Control	-	Yes
JC**121450**	RGBW 2.4G RF LED receiver (for use with JC**121451** Wall Mounted Control)	350W Max	Yes

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

LED Strip
RGBW IP20

- Select or blend red, green, blue and white to create a variety of colours using our wireless RF receivers
- White options available in warm white (3000K) and neutral white (4000K)
- Continuous reel of LED strip
- Cut to required length at 100mm cut points ensuring a more accurate installation
- Remote control and receiver required, see p.346-347
- Aluminium profile options, see p.356






JC**121449** RGBW 2.4G RF
Hand Held Remote



JC**121451** RGBW 2.4G RF
Wall Mounted Control

IP 20 **Rating** | III **Class 3** | 3yr **Warranty*** | **Dimmable options** | **24V**



5M REEL	50M REEL	DESCRIPTION	COL TEMP.	WATT	LUMENS†
JC**121279**	JC**121311**	LED Strip Reel IP20 RGB-WW	RGBW (3000K)	7.2W	-
JC**121280**	JC**121312**	LED Strip Reel IP20 RGB-NW	RGBW (4000K)	7.2W	-
JC**121281**	JC**121313**	LED Strip Reel IP20 RGB-WW	RGBW (3000K)	17.6W	-
JC**121282**	JC**121314**	LED Strip Reel IP20 RGB-NW	RGBW (4000K)	17.6W	-

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

LED Strip
RGBW IP65

- Select or blend red, green, blue and white to create a variety of colours using our wireless RF receivers
- White options available in warm white (3000K) and neutral white (4000K)
- Continuous reel of LED strip
- Cut to required length at 100mm cut points ensuring a more accurate installation
- Remote control and receiver required, see p.346-347
- Aluminium profile options, see p.356






JC**121449** RGBW 2.4G RF Hand Held Remote



JC**121451** RGBW 2.4G RF Wall Mounted Control

IP 65 **Rating** | III **Class 3** | 3yr **Warranty*** | **Dimmable options** | **24V**




5M REEL	50M REEL	DESCRIPTION	COL TEMP.	WATT	LUMENS†
JC**121295**	JC**121327**	LED Strip Reel IP65 RGB-WW	RGBW (3000K)	7.2W	-
JC**121296**	JC**121328**	LED Strip Reel IP65 RGB-NW	RGBW (4000K)	7.2W	-
JC**121297**	JC**121329**	LED Strip Reel IP65 RGB-WW	RGBW (3000K)	17.6W	-
JC**121298**	JC**121330**	LED Strip Reel IP65 RGB-NW	RGBW (4000K)	17.6W	-

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

COB LED Strip

Customisable LED Strip Lighting to suit all applications

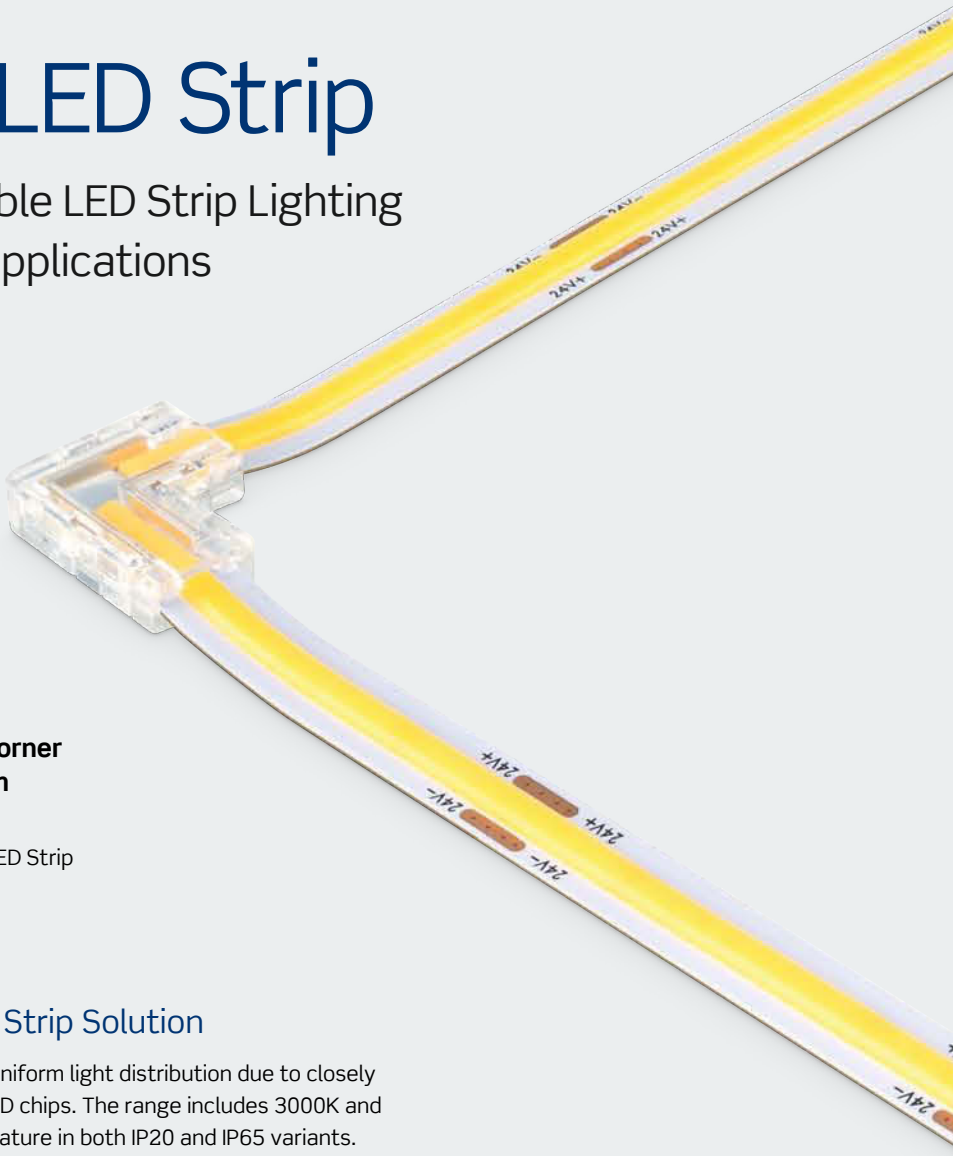

JC**121511**

Strip-to-strip Corner Connector 8mm


Pack of 5

For use with COB LED Strip


Seamless LED Strip Solution

COB LED Strip has a uniform light distribution due to closely arranged arrays of LED chips. The range includes 3000K and 4000K colour temperature in both IP20 and IP65 variants. The free cut option allows you to cut the strip anywhere you require. Available connectors remove the need for time consuming soldering of joints.


FREE CUT OPTION FOR INCREASED FLEXIBILITY

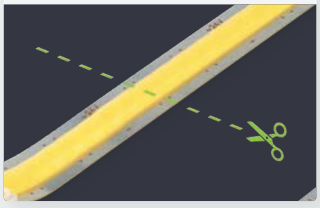

528* LED'S P/M FOR SEAMLESS LIGHT

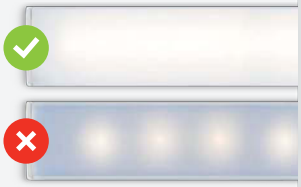

*528 LED's per metre for COB Free Cut, 320 LED's per metre for COB 50mm Cut Points.

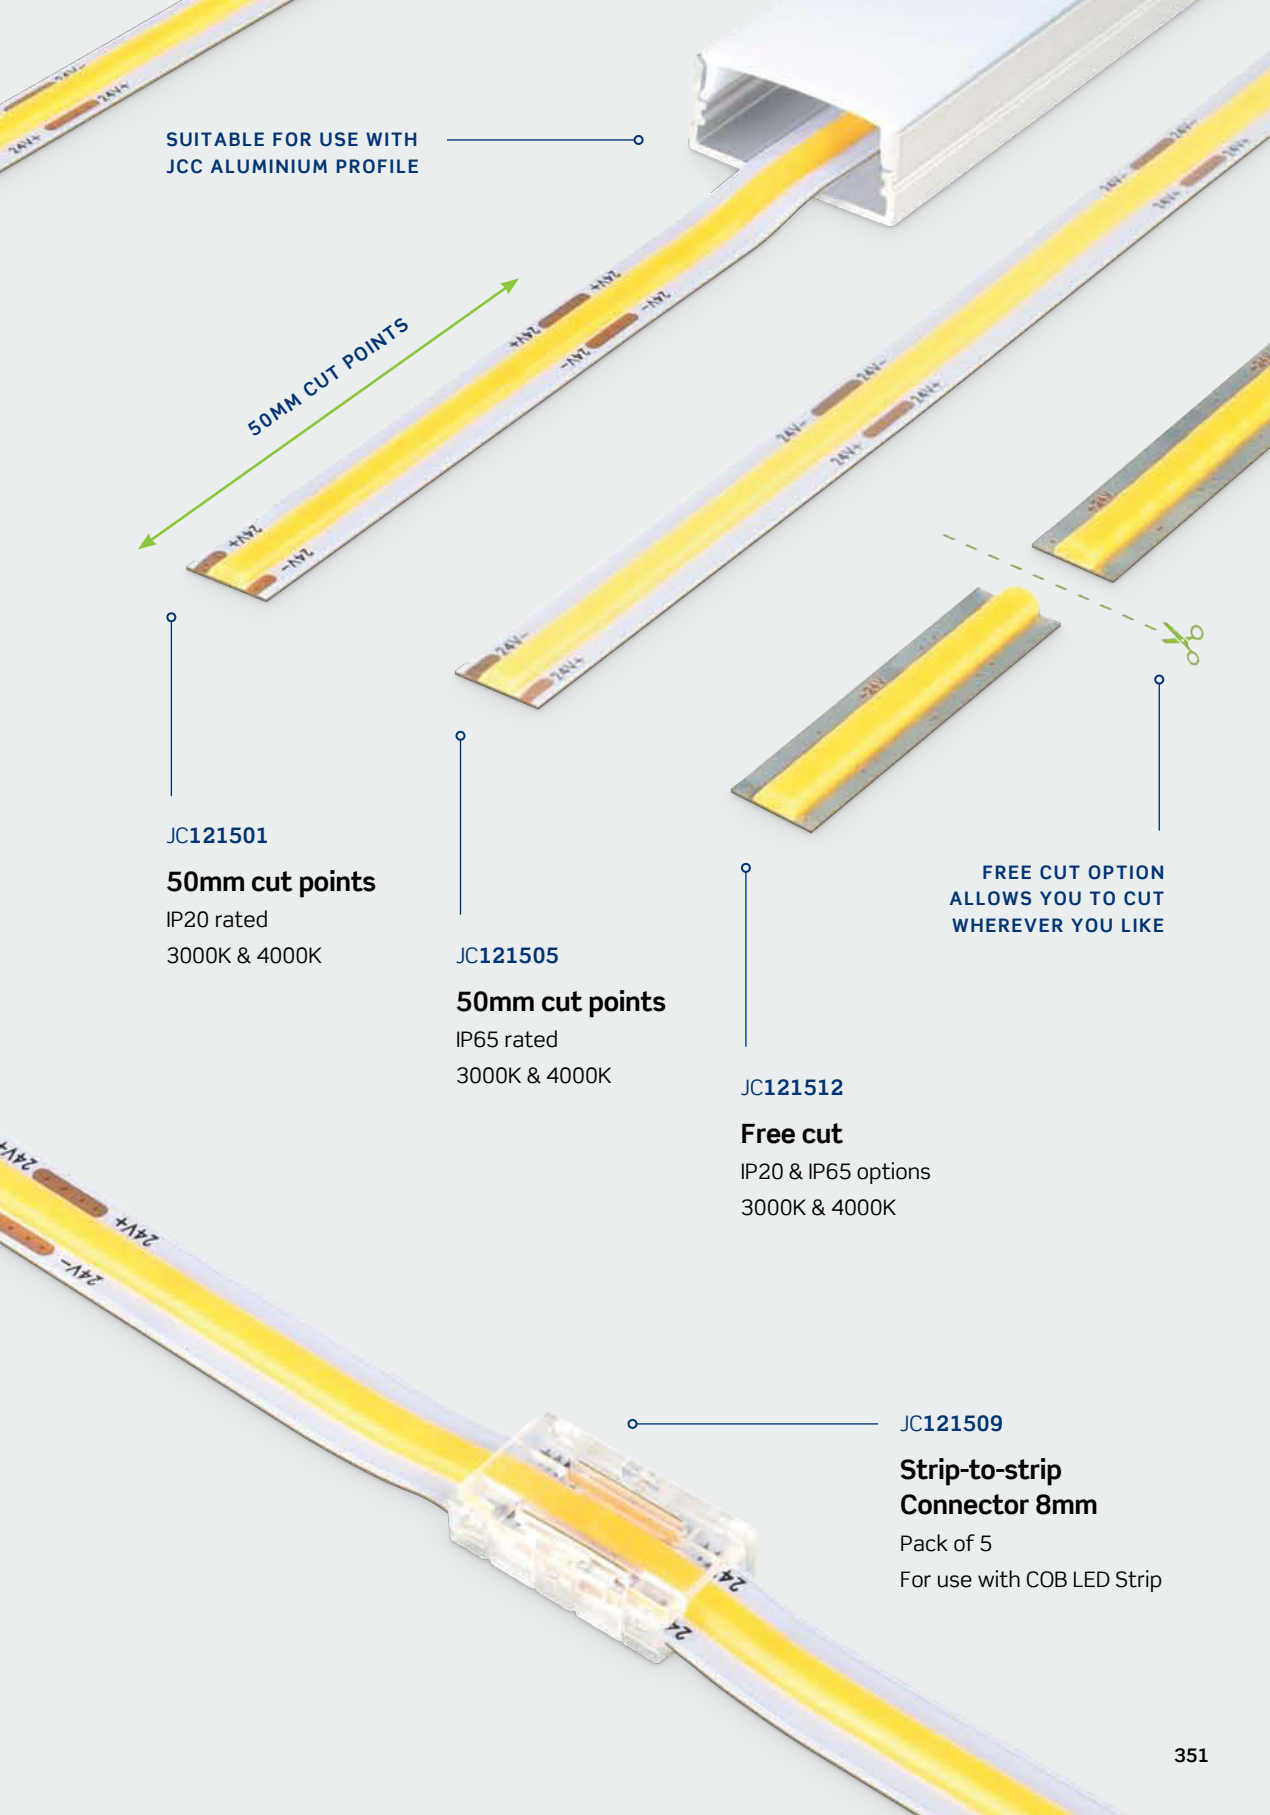

JC**121501**

50mm cut points

IP20 rated

3000K & 4000K

JC**121505**

50mm cut points

IP65 rated

3000K & 4000K

JC**121512**

Free cut

IP20 & IP65 options

3000K & 4000K

JC**121509**

Strip-to-strip Connector 8mm

Pack of 5

For use with COB LED Strip

LED Strip
COB 50mm Cut Points

- Continuous reel of LED strip
- 320 LEDs per metre for an even light distribution
- Cut to required length at 50mm cut points ensuring a more accurate installation
- Available in warm white (3000K) and neutral white (4000K)
- Available with triac dimmable and non-dimmable 24V drivers, see p.357
- Aluminium profile options, see p.356



IP20 Rating | IP65 Rating | Class 3 | 90 CRI: Ra | 3yr Warranty* | Dimmable options | 24V



30M REEL	DESCRIPTION	CUT	WATT	LUMENS†
JC**121501**	COB LED Strip Reel IP20 3000K	50mm	8W	680
JC**121502**	COB LED Strip Reel IP20 4000K	50mm	8W	760
JC**121505**	COB LED Strip Reel IP65 3000K	50mm	8W	680
JC**121506**	COB LED Strip Reel IP65 4000K	50mm	8W	760

All strip dimmable with correct driver see p.357 (sold separately). | †Lumens stated are per metre.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

LED Strip
COB Free Cut

- Continuous reel of LED strip
- 528 LEDs per metre for an even light distribution
- Cut to required length anywhere you want
- Available in warm white (3000K) and neutral white (4000K)
- Available with triac dimmable and non-dimmable 24V drivers, see p.357
- Aluminium profile options, see p.356



IP20 Rating | IP65 Rating | Class 3 | CRI: Ra 90 | Warranty* 3yr | Dimmable options | 24V



30M REEL	DESCRIPTION	CUT	WATT	LUMENS†
JC**121512**	COB LED Strip Reel IP20 3000K	Free	10W	600
JC**121513**	COB LED Strip Reel IP20 4000K	Free	10W	650
JC**121514**	COB LED Strip Reel IP65 3000K	Free	10W	540
JC**121515**	COB LED Strip Reel IP65 4000K	Free	10W	585

All strip dimmable with correct driver see p.357 (sold separately). | †Lumens stated are per metre.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

LED Strip
COB Connectors

- Suitable for use with COB and COB Free Cut LED Strip

JC**121509**



JC**121511**



JC**121510**

IP 20 **Rating**

2yr **Guarantee**

CODE	DESCRIPTION
JC**121509**	Strip-to-Strip 8mm 2-pin Connector
JC**121510**	Strip-to-Cable 8mm 2-pin Connector
JC**121511**	Strip-to-Strip 8mm 2-pin Corner Connector

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

The installation room at JCC allows us to physically show the challenges we face. Taking our feedback, they created prototypes and shared them with us for our input.

CHARLIE HARWOOD

Sendit Electrical



Scan QR for electrician video

LED Strip
Aluminium Profile

- Surface, slimline, recessed and corner profiles available
- Provided with two polycarbonate end caps as standard
- Available in 0.5m, 1m, 1.5m and 2m lengths



Slimline aluminium profile



Plaster-in aluminium profile



Slimline plaster-in aluminium profile




Surface mounted aluminium profile



Recessed aluminium profile



Corner mounted aluminium profile

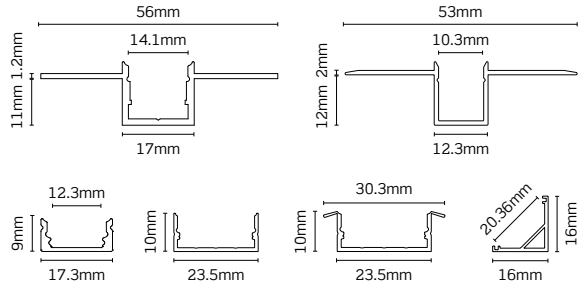

IP 20 Rating

2yr Guarantee

SIL Silver

CODE	DESCRIPTION
JC**121362**	Surface mounted aluminium profile 0.5m
JC**121363**	Surface mounted aluminium profile 1m
JC**121364**	Surface mounted aluminium profile 1.5m
JC**121265**	Surface mounted aluminium profile 2m
JC**121375**	Slimline surface aluminium profile 0.5m
JC**121376**	Slimline surface aluminium profile 1m
JC**121377**	Slimline surface aluminium profile 1.5m
JC**121378**	Slimline surface aluminium profile 2m
JC**121365**	Recessed aluminium profile 0.5m

Body: Aluminium. **Diffuser:** Polycarbonate.

CODE	DESCRIPTION
JC**121366**	Recessed aluminium profile 1m
JC**121367**	Recessed aluminium profile 1.5m
JC**121266**	Recessed aluminium profile 2m
JC**121368**	Corner mounted aluminium profile 0.5m
JC**121369**	Corner mounted aluminium profile 1m
JC**121370**	Corner mounted aluminium profile 1.5m
JC**121267**	Corner mounted aluminium profile 2m
JC**121387**	Plaster-in aluminium profile 2m
JC**121388**	Slimline plaster-in aluminium profile 2m

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

LED Strip
Drivers



BC**020010** - 25W Triac dim.



BC**020011** - 50W Triac dim.



BC**020001** - 75W Triac dim.



BC**020009** - 12W Non-dim.



BC**020012** - 30W Non-dim.



BC**020013** - 75W Non-dim.



BC**020007** - 200W Non-dim.

IP 20 **Rating** | 3yr **Warranty*** | 5yr **Warranty*** | **Dimmable options**

CODE	DESCRIPTION	WARRANTY*	WATT	DIM	IP
BC**020010**	Triac dimmable 24V driver	5 year	25W	Yes	20
BC**020011**	Triac dimmable 24V driver	5 year	50W	Yes	20
BC**020001**	Triac dimmable 24V driver	3 year	75W	Yes	20
BC**020009**	Non-dimmable 24V driver	5 year	12W	No	20
BC**020012**	Non-dimmable 24V driver	5 year	30W	No	20
BC**020013**	Non-dimmable 24V driver	5 year	75W	No	20
BC**020007**	Non-dimmable 24V driver	5 year	200W	No	20

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

LED Strip
Connectors & Accessories



JC**83213**



JC**83215**



JC**83214**



JC**83216**



JC**121359**



JC**121360**

IP 20 Rating

IP 65 Rating

2yr Guarantee

CODE	COMPONENT	FOR USE WITH	DESCRIPTION	PACK QTY.
JC**121349**	DC cable	Single colour	2m DC cable	1
JC**121350**	DC cable	RGBW	2m DC cable	1
JC**83213**	Pre-wired connector	Single colour	Strip-to-cable connector with 15cm cable and clip	6
JC**83215**	Pre-wired connector	Single colour	Strip-to-strip connector with 15cm cable and clip	5
JC**121351**	Strip-to-strip	Single colour	10mm clips	10
JC**121352**	Pre-wired connector	Single colour	10mm clips with 0.5m cable	10
JC**121354**	Pre-wired connector	RGBW	10mm clips with 0.5m cable	10
JC**83214**	Strip-to-strip	Single colour	Corner connector	5
JC**83216**	Strip-to-strip	Single colour	Connector with heat shrink	10
JC**121359**	Strip-to-strip	Single colour	10mm clips	10
JC**121353**	Strip-to-strip	RGBW	10mm clips	10
JC**121360**	Strip-to-cable	Single colour	10mm clips	10
JC**83217**	Retaining clips	All LED Strip	PCB retaining clips	10
JC**83218**	Retaining clips	DC cable	DC cable retaining clips	10
JC**121348**	IP65 seal connector	All LED Strip	30mm heat shrink	5
JC**121357**	IP65 seal connector	All LED Strip	IP end caps	2

All connectors are IP20 as standard, for IP65 use JC**121348** 30mm heat shrink and JC**121357** IP65 silicone glue at each connection point.

LED Strip
Corners

- Corner pieces in all colour temperatures to ensure seamless illumination



JC**121333**

2yr
Guarantee

CODE	DESCRIPTION	COL TEMP.
JC**121333**	4.8W Corner left/right pack	3000K
JC**121334**	4.8W Corner left/right pack	4000K
JC**121337**	9.6W Corner left/right pack	3000K
JC**121338**	9.6W Corner left/right pack	4000K
JC**121341**	14.4W Corner left/right pack	3000K
JC**121342**	14.4W Corner left/right pack	4000K
JC**121344**	RGB-WW 7.2W left/right pack	RGBW 3000K
JC**121345**	RGB-NW 7.2W left/right pack	RGBW 4000K
JC**121346**	RGB-WW 17.6W left/right pack	RGBW 3000K
JC**121347**	RGB-NW 17.6W left/right pack	RGBW 4000K

Simple online configurator

Automatically calculate your requirements

Our quick and easy online configurator tool has been created to simplify building your strip light project.

The step-by-step process, combined with the intuitive design, makes it easy to specify your LED Strip requirements whilst automatically calculating the most economical driver available for your configuration. Offering a range of different options, including low, standard and high output LED Strip; 3000K and 4000K colour temperatures alongside RGBW options, IP20 & IP65 protection and profiles to suit all applications.

Configure

Choose the components you require for your design, including output, IP rating, colour temperature, dimmability and profile options.

Design

Enter your LED Strip and DC cable measurements for our configurator to automatically generate a summary of components to provide to your chosen wholesaler in person or via email.


Deliver

From receipt of your order summary, your chosen wholesaler will order all necessary components directly from JCC. Provide your wholesaler with a preferred delivery address and we will send your components direct to site.

Build your layout online using our step-by-step configurator

ledstrip.jcc.co.uk

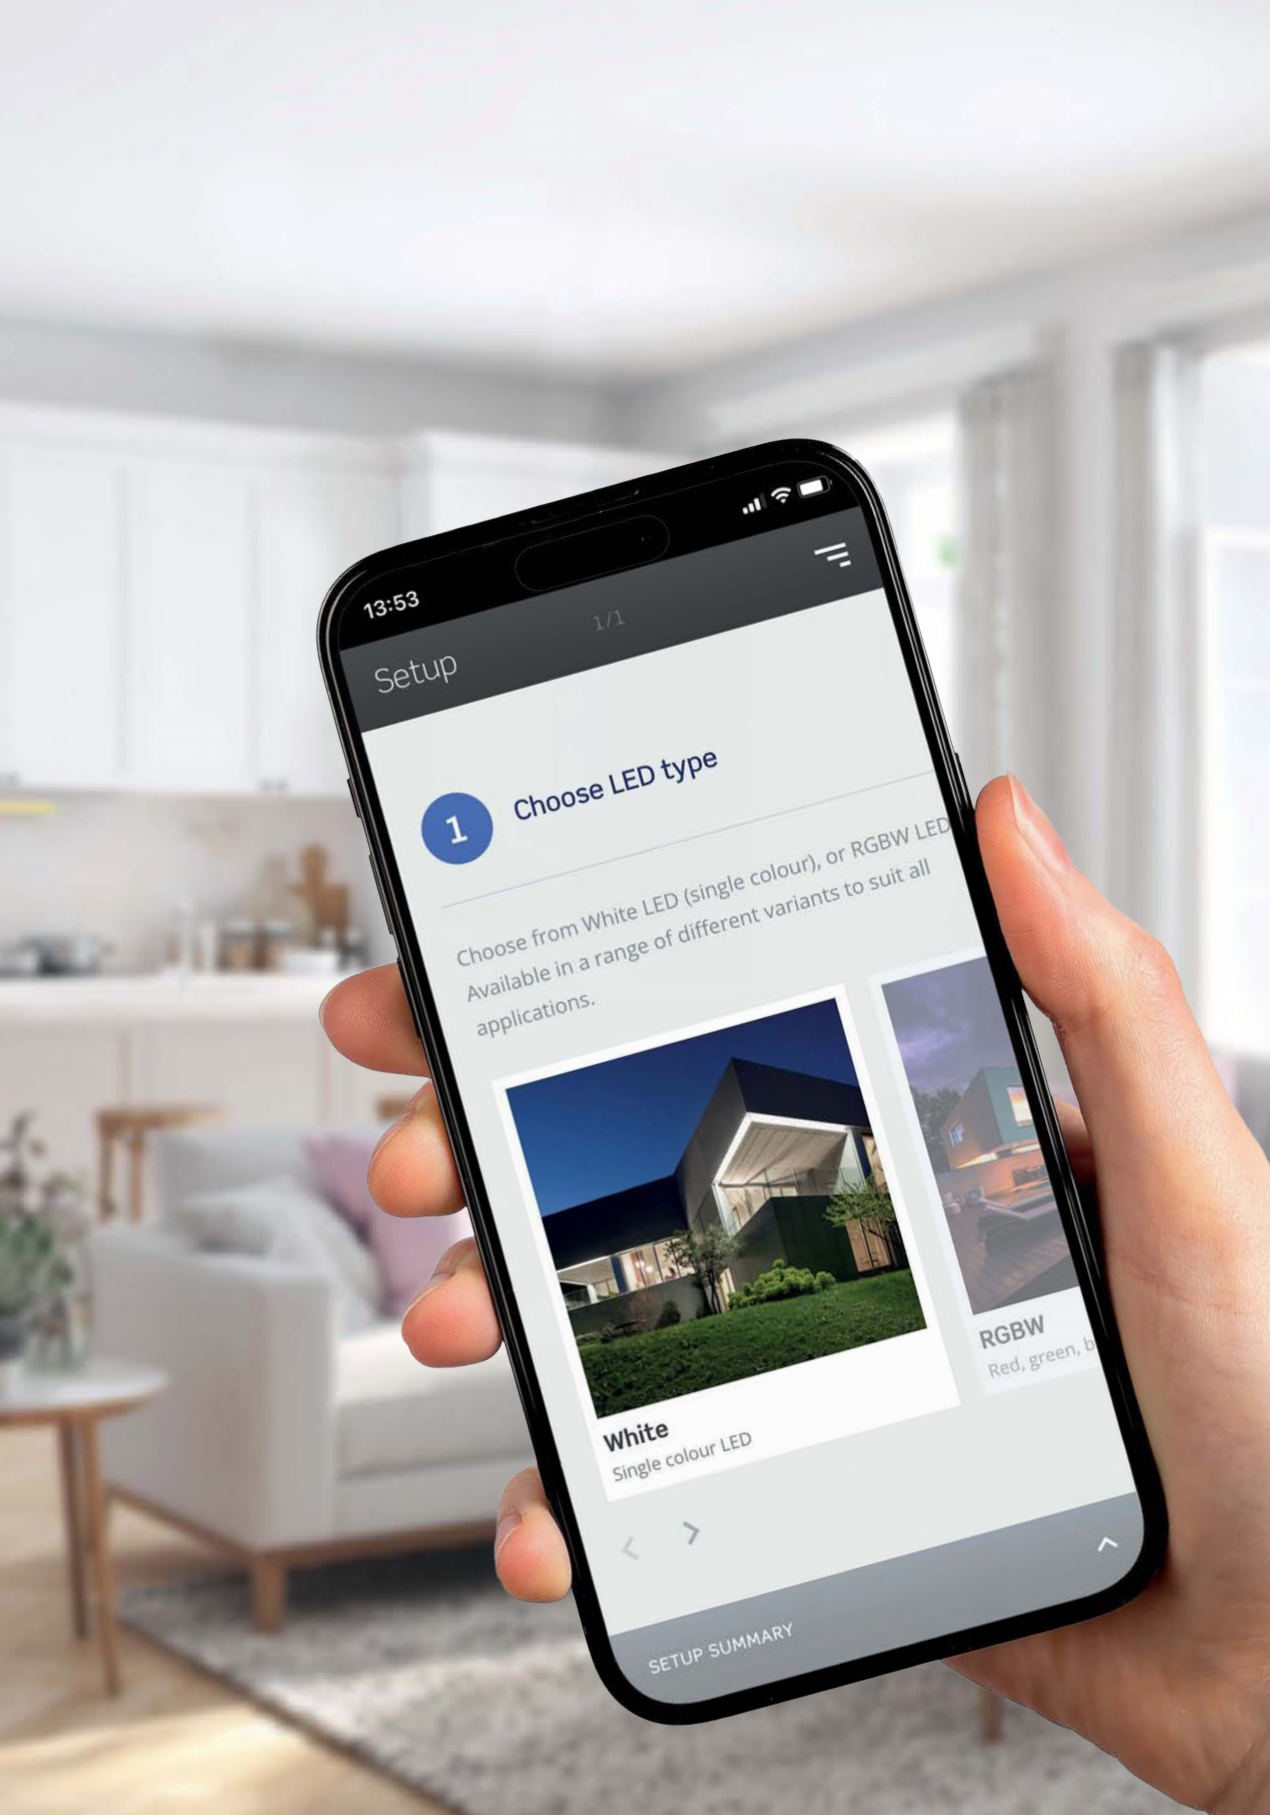


13:53
Setup
1/1
1 Choose LED type
Choose from White LED (single colour), or RGBW LED
Available in a range of different variants to suit all
applications.
White
Single colour LED
RGBW
SETUP SUMMARY

LED Undercabinet

- Three link leads available in 250mm, 500mm and 1000mm lengths
- End to end connection available
- On/off switch on each luminaire
- Supplied as standard with 1000mm mains cable

JC**83307**


JC**83305**

JC**83303**

JC**83301**

JC**83309**





IP 20 Rating | Class 2 | 80 CRI: Ra | 3yr Warranty* | 120° Beam | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**83301**	220mm Undercabinet LED Batten	4000K	No	3W	320	107
JC**83302**	220mm Undercabinet LED Batten	3000K	No	3W	300	100
JC**83303**	520mm Undercabinet LED Batten	4000K	No	8W	920	115
JC**83304**	520mm Undercabinet LED Batten	3000K	No	8W	820	103
JC**83305**	820mm Undercabinet LED Batten	4000K	No	12W	1480	123
JC**83306**	820mm Undercabinet LED Batten	3000K	No	12W	1370	114
JC**83307**	1120mm Undercabinet LED Batten	4000K	No	15W	1750	117
JC**83308**	1120mm Undercabinet LED Batten	3000K	No	15W	1650	110
JC**83309**	LED Undercabinet Link Lead: 250mm	-	-	-	-	-
JC**83310**	LED Undercabinet Link Lead: 500mm	-	-	-	-	-
JC**83311**	LED Undercabinet Link Lead: 1000mm	-	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **Clips:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.



Bulkheads

RadiaLED® Rapid Pro 366

RadiaLED® Rapid Rims 374

RadiaLED® Rapid Pro Square 376

RadiaLED® Rapid Pro Slim 378

RadiaLED® Rapid DALI/1-10V 384

RadiaLED® Utility 388

RadiaLED® Base 392

Ring Bulkhead 396

Astra Wall Lights 397

RadiaLED® Rapid Pro

Highly durable IP65 & IK10 rated wattage & colour selectable LED bulkhead

DURABLE IP65 & IK10 RATED PROTECTION



WATTAGE & COLOUR TEMP. SELECTABLE



PLUG & PLAY EMERGENCY & MICROWAVE MODULES



Designed with electricians, for electricians



MODULAR PLUG AND PLAY EM AND MW SENSORS

Easily adapt standard fittings into emergency, microwave and microwave emergency variants.



UNIQUE, CLIP-IN TOOL-LESS LED GEAR TRAY

One-push mechanism clips LED tray in without need for tools or twisting.

FOUR SIDE 20MM CONDUIT ENTRY POINTS

Designed to accommodate conduit access from top, left, right and bottom directions.



WATTAGE AND CCT SELECTABLE, 3000K/4000K/5700K

A simple switch on the LED tray allows users to choose between 3000K, 4000K or 5700K colour temperatures.

DETACHABLE, LOOP-IN/ LOOP-OUT TERMINAL BLOCK

Directly faces central cable access point for easiest termination during install.

MULTIPLE REAR CABLE ENTRY - CENTRAL & OFFSET

Multiple access points offer increased options for cable entry when retrofitting.



Cross range compatible plug & play emergency, microwave and photocell sensors

Plug & play emergency, microwave and photocell sensors allow standard RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim fittings to be easily adapted to sensing and emergency variants.



JC**EM005**

Plug & play emergency pack



LEV**71960**

Plug & play microwave sensor



LEV**71963**

Plug & play photocell sensor

Wattage and three colour selectable LED bulkhead

A simple switch on the LED tray allows users to choose between 3000K, 4000K or 5700K temperatures to suit a variety of applications. The option to choose Wattage provides users with the option to manage output and meet lux level requirements.



RadiaLED® Rapid Pro


8W/12W with rim

- Wattage selectable, 8W/12W
- Colour selectable, 3000K/4000K/5700K
- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim
- Up to 110 LpcW





Plug and play EM, MW and photocell modules



IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | Sensing options | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070300**	RadiaLED Rapid Pro with white rim	3000K/4000K/5700K	No	8W/12W	880/1300
JC**070301**	RadiaLED Rapid Pro Emergency with white rim	3000K/4000K/5700K	No	8W/12W	880/1300
JC**070302**	RadiaLED Rapid Pro photocell with white rim	3000K/4000K/5700K	No	8W/12W	880/1300
JC**070303**	RadiaLED Rapid Pro photocell EM with white rim	3000K/4000K/5700K	No	8W/12W	880/1300
JC**070304**	RadiaLED Rapid Pro MW on/off with white rim	3000K/4000K/5700K	Yes	8W/12W	880/1300
JC**070305**	RadiaLED Rapid Pro MW on/off EM with white rim	3000K/4000K/5700K	Yes	8W/12W	880/1300
JC**070306**	RadiaLED Rapid Pro MW dim with white rim	3000K/4000K/5700K	Yes	8W/12W	880/1300
JC**070307**	RadiaLED Rapid Pro MW dim EM with white rim	3000K/4000K/5700K	Yes	8W/12W	880/1300
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes battery. Terms & Conditions apply.

RadiaLED® Rapid Pro


8W/12W without rim

- Wattage selectable, 8W/12W
- Colour selectable, 3000K/4000K/5700K
- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim
- Up to 110 LpcW





Plug and play EM, MW and photocell modules



IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | Sensing options | Dimming options | Emergency options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070310**	RadiaLED Rapid Pro no rim	3000K/4000K/5700K	No	8W/12W	880/1300
JC**070311**	RadiaLED Rapid Pro Emergency no rim	3000K/4000K/5700K	No	8W/12W	880/1300
JC**070312**	RadiaLED Rapid Pro photocell no rim	3000K/4000K/5700K	No	8W/12W	880/1300
JC**070313**	RadiaLED Rapid Pro photocell EM no rim	3000K/4000K/5700K	No	8W/12W	880/1300
JC**070314**	RadiaLED Rapid Pro MW on/off no rim	3000K/4000K/5700K	Yes	8W/12W	880/1300
JC**070315**	RadiaLED Rapid Pro MW on/off EM no rim	3000K/4000K/5700K	Yes	8W/12W	880/1300
JC**070316**	RadiaLED Rapid Pro MW dim no rim	3000K/4000K/5700K	Yes	8W/12W	880/1300
JC**070317**	RadiaLED Rapid Pro MW dim EM no rim	3000K/4000K/5700K	Yes	8W/12W	880/1300
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.


RadiaLED® Rapid Pro
12W/16W/20W with rim

- Wattage selectable, 12W/16W/20W
- Colour selectable, 3000K/4000K/5700K
- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim
- Up to 126 LpcW





Plug and play EM, MW and photocell modules



IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | Sensing options | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070320**	RadiaLED Rapid Pro with white rim	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070321**	RadiaLED Rapid Pro Emergency with white rim	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070322**	RadiaLED Rapid Pro photocell with white rim	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070323**	RadiaLED Rapid Pro photocell EM with white rim	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070324**	RadiaLED Rapid Pro MW on/off with white rim	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070325**	RadiaLED Rapid Pro MW on/off EM with WH rim	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070326**	RadiaLED Rapid Pro MW dim with white rim	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070327**	RadiaLED Rapid Pro MW dim EM with white rim	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-Test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

RadiaLED® Rapid Pro


12W/16W/20W without rim

- Wattage selectable, 12W/16W/20W
- Colour selectable, 3000K/4000K/5700K
- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim
- Up to 126 LpcW





Plug and play EM, MW and photocell modules



IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | Sensing options | Dimming options | Emergency options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070330**	RadiaLED Rapid Pro no rim	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070331**	RadiaLED Rapid Pro Emergency no rim	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070332**	RadiaLED Rapid Pro photocell no rim	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070333**	RadiaLED Rapid Pro photocell EM no rim	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070334**	RadiaLED Rapid Pro MW on/off no rim	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070335**	RadiaLED Rapid Pro MW on/off EM no rim	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070336**	RadiaLED Rapid Pro MW dim no rim	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070337**	RadiaLED Rapid Pro MW dim EM no rim	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-Test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

RadiaLED® Rapid
Rims

NEW VARIANTS

- For use with all RadiaLED® Rapid and RadiaLED® Rapid Pro bulkheads*

WHITE



BLACK



CHROME



SATIN CHROME



SATIN SILVER



WHITE EYELID



BLACK EYELID



IP 20 Rating

2yr Guarantee

SMALL RIM	LARGE RIM	DESCRIPTION	FINISH
JC**070187**	JC**070195**	RadiaLED Rapid Body Rim	White
JC**070188**	JC**070196**	RadiaLED Rapid Body Rim	Black
JC**070189**	JC**070197**	RadiaLED Rapid Body Rim	Chrome
JC**070190**	JC**070198**	RadiaLED Rapid Body Rim	Satin Chrome
JC**070193**	JC**070201**	RadiaLED Rapid Body Rim	Satin Silver
JC**070380**	JC**070381**	RadiaLED Rapid Body Rim	White Eyelid
JC**070194**	JC**070202**	RadiaLED Rapid Body Rim	Black Eyelid

Rim: Polycarbonate.

*Excludes RadiaLED® Rapid Pro Slim and Square.




RadiaLED® Rapid Pro
Square White

- Wattage selectable, 12W/16W/20W
- Colour selectable, 3000K/4000K/5700K
- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim
- Up to 126 LpcW





Plug and play EM, MW and photocell modules



IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | Sensing options | Dimming options | Emergency options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070340**	RadiaLED Rapid Pro Square white	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070341**	RadiaLED Rapid Pro Square Emergency white	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070342**	RadiaLED Rapid Pro Square photocell white	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070343**	RadiaLED Rapid Pro Square photocell EM white	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070344**	RadiaLED Rapid Pro Square MW on/off white	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070345**	RadiaLED Rapid Pro Square MW on/off EM white	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070346**	RadiaLED Rapid Pro Square MW dim white	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070347**	RadiaLED Rapid Pro MW dim EM white	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-Test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.


RadiaLED® Rapid Pro
Square Black

- Wattage selectable, 12W/16W/20W
- Colour selectable, 3000K/4000K/5700K
- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim
- Up to 126 LpcW





Plug and play EM, MW and photocell modules



IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | Sensing options | Dimming options | Emergency options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070350**	RadiaLED Rapid Pro Square black	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070351**	RadiaLED Rapid Pro Square Emergency black	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070352**	RadiaLED Rapid Pro Square photocell black	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070353**	RadiaLED Rapid Pro Square photocell EM black	3000K/4000K/5700K	No	12W/16W/20W	1490/2040/2430
JC**070354**	RadiaLED Rapid Pro Square MW on/off black	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070355**	RadiaLED Rapid Pro Square MW on/off EM black	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070356**	RadiaLED Rapid Pro Square MW dim black	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
JC**070357**	RadiaLED Rapid Pro MW dim EM black	3000K/4000K/5700K	Yes	12W/16W/20W	1490/2040/2430
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-Test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

NEW
VARIANTS

RadiaLED®
Rapid Pro Slim

Slim Wattage and colour selectable LED bulkhead

WATTAGE AND THREE COLOUR SELECTABLE



NEW EYELID RIM OPTIONS AVAILABLE




PLUG & PLAY EM, MW AND PHOTOCELL MODULES





PRE-DRILLED IP65 REAR CABLE ENTRY POINTS

Multiple access points offer increased options for cable entry when retrofitting.



HINGED LED GEAR TRAY DESIGN

Hinged LED tray designed to simplify installation with faster access to termination.





WATTAGE AND THREE COLOUR SELECTABLE

Choose between 3000K, 4000K or 5700K colour temperatures, and 8W/12W or 12W/18W Wattages.

DETACHABLE, LOOP-IN/ LOOP-OUT TERMINAL BLOCK

Directly faces central cable access point for easiest termination during install.

PLUG & PLAY EM, MW AND PHOTOCELL MODULES

Easily adapt standard fittings into emergency, microwave and microwave emergency variants. Cross range compatible with RadiaLED® Rapid Pro.

RadiaLED® Rapid Pro Slim
8W/12W with white rim

NEW VARIANTS

- Wattage selectable, 8W/12W
- Colour selectable, 3000K/4000K/5700K
- Unique, hinged LED gear tray design
- Up to 109 lpcW
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim



Eyelid rim now available



Plug and play EM, MW and photocell modules



IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | Sensing options | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070250**	RadiaLED Rapid Pro Slim with white rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070251**	RadiaLED Rapid Pro Slim Emergency with white rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070252**	RadiaLED Rapid Pro Slim photocell with white rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070253**	RadiaLED Rapid Pro Slim photocell EM with white rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070254**	RadiaLED Rapid Pro Slim MW on/off with white rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070255**	RadiaLED Rapid Pro Slim MW on/off EM with white rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070286**	RadiaLED Rapid Pro Slim with white eyelid rim	3000K/4000K/5700K	No	8W/12W	800/1300
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-Test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes battery. Terms & Conditions apply.

RadiaLED® Rapid Pro Slim
8W/12W with black rim

NEW VARIANTS

- Wattage selectable, 8W/12W
- Colour selectable, 3000K/4000K/5700K
- Unique, hinged LED gear tray design
- Up to 109 lpcW
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim



Eyelid rim now available



Plug and play EM, MW and photocell modules





IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | Sensing options | Dimming options | Emergency options | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070258**	RadiaLED Rapid Pro Slim with black rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070259**	RadiaLED Rapid Pro Slim Emergency with black rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070260**	RadiaLED Rapid Pro Slim photocell with black rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070261**	RadiaLED Rapid Pro Slim photocell EM with black rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070262**	RadiaLED Rapid Pro Slim MW on/off with black rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070263**	RadiaLED Rapid Pro Slim MW on/off EM with black rim	3000K/4000K/5700K	No	8W/12W	800/1300
JC**070287**	RadiaLED Rapid Pro Slim with black eyelid rim	3000K/4000K/5700K	No	8W/12W	800/1300
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-Test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

RadiaLED® Rapid Pro Slim
12W/18W with white rim

NEW VARIANTS

- Wattage selectable, 12W/18W
- Colour selectable, 3000K/4000K/5700K
- Unique, hinged LED gear tray design
- Up to 112 LpcW
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim




Eyelid rim now available



Plug and play EM, MW and photocell modules





IP65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK08 Rating | Sensing options | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070266**	RadiaLED Rapid Pro Slim with white rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070267**	RadiaLED Rapid Pro Slim Emergency with white rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070268**	RadiaLED Rapid Pro Slim photocell with white rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070269**	RadiaLED Rapid Pro Slim photocell EM with white rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070270**	RadiaLED Rapid Pro Slim MW on/off with white rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070271**	RadiaLED Rapid Pro Slim MW on/off EM with white rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070288**	RadiaLED Rapid Pro Slim with white eyelid rim	3000K/4000K/5700K	No	12W/18W	1335/1850
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-Test	-	-	-	-

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 5 year warranty includes battery. Terms & Conditions apply.

RadiaLED® Rapid Pro Slim
12W/18W with black rim

NEW VARIANTS

- Wattage selectable, 12W/18W
- Colour selectable, 3000K/4000K/5700K
- Unique, hinged LED gear tray design
- Up to 112 LpcW
- Cross range compatible plug & play emergency, microwave and photocell modules. For use with RadiaLED® Rapid Pro and RadiaLED® Rapid Pro Slim




Eyelid rim now available



Plug and play EM, MW and photocell modules





IP 65 Rating | Class 2 | Colour switchable | Wattage switchable | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | Sensing options | Dimming options | Emergency options | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**070274**	RadiaLED Rapid Pro Slim with black rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070275**	RadiaLED Rapid Pro Slim Emergency with black rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070276**	RadiaLED Rapid Pro Slim photocell with black rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070277**	RadiaLED Rapid Pro Slim photocell EM with black rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070278**	RadiaLED Rapid Pro Slim MW on/off with black rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070279**	RadiaLED Rapid Pro Slim MW on/off EM with black rim	3000K/4000K/5700K	No	12W/18W	1335/1850
JC**070289**	RadiaLED Rapid Pro Slim with black eyelid rim	3000K/4000K/5700K	No	12W/18W	1335/1850
LEV**71960**	RadiaLED Rapid Pro MW on/off Sensor	-	-	-	-
LEV**71963**	RadiaLED Rapid Pro Photocell on/off Sensor	-	-	-	-
JC**EM005**	RadiaLED Rapid Pro Emergency Pack	-	-	-	-
JC**EM005ST**	RadiaLED Rapid Pro Emergency Pack Self-Test	-	-	-	-


Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: Polycarbonate. **Rim:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
5 year warranty includes battery. Terms & Conditions apply.

RadiaLED® Rapid
12W DALI/1-10V

- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**070083**	RadiaLED Rapid DALI / 1-10V with white rim	4000K	Yes	12W	1070	89
JC**070084**	RadiaLED Rapid DALI / 1-10V emergency with white rim	4000K	Yes	12W	1070	89


Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: PA6 Nylon.
Not suitable for use with RadiaLED Rapid Pro emergency, microwave and photocell modules.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

RadiaLED® Rapid
16W DALI/1-10V

- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points





IP 65 Rating | Class 2 | Class 1 (EM) | 84 CRI: Ra | 5yr Warranty* | IK 10 Rating | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**070093**	RadiaLED Rapid DALI / 1-10V with white rim	4000K	Yes	16W	1600	100
JC**070094**	RadiaLED Rapid DALI / 1-10V emergency with white rim	4000K	Yes	16W	1600	100

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: PA6 Nylon.
Not suitable for use with RadiaLED Rapid Pro emergency, microwave and photocell modules.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

RadiaLED® Rapid

24W

- Unique, clip in tool-less LED gear tray design
- Four side 20mm conduit entry points







Rating


Class 2


Class 1 (EM)



CRI: Ra



Warranty*



Rating


Sensing options


Dimming options


Emergency options



White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**070095**	RadiaLED Rapid with white rim	4000K	No	24W	2360	98
JC**070096**	RadiaLED Rapid emergency with white rim	4000K	No	24W	2360	98
JC**070097**	RadiaLED Rapid Photocell On/Off with white rim	4000K	No	24W	2360	98
JC**070098**	RadiaLED Rapid Photocell On/Off EM with white rim	4000K	No	24W	2360	98
JC**070099**	RadiaLED Rapid Microwave On/Off with white rim	4000K	No	24W	2360	98
JC**070100**	RadiaLED Rapid Microwave On/Off EM with white rim	4000K	No	24W	2360	98
JC**070101**	RadiaLED Rapid Microwave Dimming with white rim	4000K	Yes	24W	2360	98
JC**070102**	RadiaLED Rapid Microwave Dimming EM with white rim	4000K	Yes	24W	2360	98
JC**070103**	RadiaLED Rapid DALI / 1-10V with white rim	4000K	Yes	24W	2360	98
JC**070104**	RadiaLED Rapid DALI / 1-10V emergency with white rim	4000K	Yes	24W	2360	98

Body: Polycarbonate. **Diffuser:** Polycarbonate. **LED Tray**: PA6 Nylon.
Not suitable for use with RadiaLED Rapid Pro emergency, microwave and photocell modules.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.



RadiaLED® Utility
12W White Opal

- IP65 protection against dust and moisture
- Photocell and microwave sensing options available
- DALI and 1-10V dimmable options available





IP65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**23401WOP**	RadiaLED Utility	4000K	No	12W	700
JC**23401EMWOP**	RadiaLED Utility emergency	4000K	No	12W	700
JC**23401WOPDIM**	RadiaLED Utility DALI/1-10V	4000K	Yes	12W	700
JC**23401EMWOPDIM**	RadiaLED Utility DALI/1-10V emergency	4000K	Yes	12W	700
JC**23411WOP**	RadiaLED Utility microwave on/off	4000K	No	12W	700
JC**23411EMWOP**	RadiaLED Utility microwave on/off emergency	4000K	No	12W	700
JC**23421WOP**	RadiaLED Utility microwave step dim	4000K	-	12W	700
JC**23431WOP**	RadiaLED Utility on/off photocell	4000K	No	12W	700
JC**23431EMWOP**	RadiaLED Utility on/off photocell emergency	4000K	No	12W	700


Body: Polycarbonate. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase. 2 year warranty on batteries for emergency variants. Terms & Conditions apply.

RadiaLED® Utility
12W Prismatic

- IP65 protection against dust and moisture
- Photocell and microwave sensing options available
- DALI and 1-10V dimmable options available





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**23401WPR**	RadiaLED Utility	4000K	No	12W	1150
JC**23401EMWPR**	RadiaLED Utility emergency	4000K	No	12W	1150
JC**23401WPRDIM**	RadiaLED Utility DALI/1-10V	4000K	Yes	12W	1150
JC**23401EMWPRDIM**	RadiaLED Utility DALI/1-10V emergency	4000K	Yes	12W	1150
JC**23411WPR**	RadiaLED Utility microwave on/off	4000K	No	12W	1150
JC**23411EMWPR**	RadiaLED Utility microwave on/off emergency	4000K	No	12W	1150
JC**23421WPR**	RadiaLED Utility microwave step dim	4000K	-	12W	1150
JC**23431WPR**	RadiaLED Utility on/off photocell	4000K	No	12W	1150
JC**23431EMWPR**	RadiaLED Utility on/off photocell emergency	4000K	No	12W	1150


Body: Polycarbonate. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

RadiaLED® Utility
21W White Opal

- IP65 protection against dust and moisture
- Photocell and microwave sensing options available
- DALI and 1-10V dimmable options available





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**23402WOP**	RadiaLED Utility	4000K	No	21W	1350
JC**23402EMWOP**	RadiaLED Utility emergency	4000K	No	21W	1350
JC**23402WOPDIM**	RadiaLED Utility DALI/1-10V	4000K	Yes	21W	1350
JC**23402EMWOPDIM**	RadiaLED Utility DALI/1-10V emergency	4000K	Yes	21W	1350
JC**23412WOP**	RadiaLED Utility microwave on/off	4000K	No	21W	1350
JC**23412EMWOP**	RadiaLED Utility microwave on/off emergency	4000K	No	21W	1350
JC**23422WOP**	RadiaLED Utility microwave step dim	4000K	-	21W	1350
JC**23422EMWOP**	RadiaLED Utility microwave step dim emergency	4000K	-	21W	1350
JC**23432WOP**	RadiaLED Utility on/off photocell	4000K	No	21W	1350
JC**23432EMWOP**	RadiaLED Utility on/off photocell emergency	4000K	No	21W	1350


Body: Polycarbonate. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

RadiaLED® Utility
21W Prismatic

- IP65 protection against dust and moisture
- Photocell and microwave sensing options available
- DALI and 1-10V dimmable options available





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Sensing options | Dimming options | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**23402WPR**	RadiaLED Utility	4000K	No	21W	2000
JC**23402EMWPR**	RadiaLED Utility emergency	4000K	No	21W	2000
JC**23402WPRDIM**	RadiaLED Utility DALI/1-10V	4000K	Yes	21W	2000
JC**23402EMWPRDIM**	RadiaLED Utility DALI/1-10V emergency	4000K	Yes	21W	2000
JC**23412WPR**	RadiaLED Utility microwave on/off	4000K	No	21W	2000
JC**23412EMWPR**	RadiaLED Utility microwave on/off emergency	4000K	No	21W	2000
JC**23422WPR**	RadiaLED Utility microwave step dim	4000K	-	21W	2000
JC**23422EMWPR**	RadiaLED Utility microwave step dim emergency	4000K	-	21W	2000
JC**23432WPR**	RadiaLED Utility on/off photocell	4000K	No	21W	2000
JC**23432EMWPR**	RadiaLED Utility on/off photocell emergency	4000K	No	21W	2000


Body: Polycarbonate. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

RadiaLED® Base
12W

- IP44 protection against dust and moisture





IP 44 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**24240**	RadiaLED Base	4000K	No	12W	1050	88


Body: Steel. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

RadiaLED® Base
18W

- IP44 protection against dust and moisture





IP 44 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | Emergency options | WH White

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**24241**	RadiaLED Base	4000K	No	18W	1500	83
JC**24241EM**	RadiaLED Base emergency	4000K	No	18W	1500	83


Body: Steel. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

RadiaLED® Base
32W

- IP44 protection against dust and moisture





IP 44 **Rating** | **Class 1** | 80 **CRI: Ra** | 5yr **Warranty*** | **Emergency options** | WH **White**

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**24242**	RadiaLED Base	4000K	No	32W	2900	91
JC**24242EM**	RadiaLED Base emergency	4000K	No	32W	2900	91

Body: Steel. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.



Ring Bulkhead

- High output surface mounted bulkhead





35W

IP 40 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | 120° Beam | Triac

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**96406**	Ring bulkhead	4000K	Yes	35W	3160	90

Body: Aluminium. **Diffuser:** Polycarbonate. | Comes complete with mounting bracket.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Astra Wall Lights

- Available in clear and red diffuser options







IP 65 Rating | Class 1 | 2yr Guarantee | Lamp not supplied

CODE	DESCRIPTION	LAMP
JC**40007CL**	Astra Wall Light - clear diffuser	42W E27 Max
JC**40007RD**	Astra Wall Light - red diffuser	42W E27 Max

Body: Pressed Steel. **Diffuser:** Polycarbonate. | Lamp not included.

Exterior Wall & Garden


Radial Wall Light	400	Rectangular Up/Down Wall Light	424
Louvred Wall Light	402	Up/Down Wall Light	425
Downward Wall Light	403	Up/Down Light Box	428
Up/Down Wall Light GU10	404	Up/Down Wall Light GU10	429
Downward Wall Light GU10	405	Wall Spot	430
Up/Down Wall Light GU10	406	Frosted Glazed Lantern	431
Up/Down Wall Light GU10 PIR	407	Glazed Lantern Mini	432
Exterior Up/Down Wall Light GU10	408	NiteLED™ E27 Dome Wall Lights	434
Surface Mount Wall/Path Light	412	GU10 Inground Spike Spotlight	438
Linear Wall	418	GU10 Stainless Steel Garden Spike Light	439
Surface Mounted Downlight	419	Inground Spike Spotlight	440
Cylindrical Up/Down Wall Light	422	Inground Quad Direction	441

Radial Wall Light

NEW


- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Matching bollards available, see p.488
- Emergency versions available





Matching bollards available (JC**039001** & JC**039005**)

IP 65 **Rating** | **Class 1** | 3yr **Warranty*** | **Colour switchable** | **Emergency options** | BLK **Black**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**039030**	Radial Wall Light	2700K/3000K/4000K/5700K	No	10W	690	69
JC**039033**	Radial Wall Light Emergency	2700K/3000K/4000K/5700K	No	10W	690	69

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.



Louvred Wall Light


NEW

- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Matching bollards available, see p.490
- Emergency versions available






Matching bollards available (JC**039009** & JC**039013**)



Rating **Class 1** **Warranty*** **Colour switchable** **Emergency options** **Black**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**039031**	Louvred Wall Light	2700K/3000K/4000K/5700K	No	10W	440	44
JC**039034**	Louvred Wall Light Emergency	2700K/3000K/4000K/5700K	No	10W	440	44

Body: Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Downward Wall Light

NEW


- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Matching bollards available, see p.492
- Emergency versions available





Matching bollards available (JC**039017** & JC**039021**)

IP 65 **Rating** | **Class 1** | 3yr **Warranty*** | **Colour switchable** | **Emergency options** | BLK **Black**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**039032**	Downward Wall Light	2700K/3000K/4000K/5700K	No	10W	920	92
JC**039035**	Downward Wall Light Emergency	2700K/3000K/4000K/5700K	No	10W	920	92

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Up/Down Wall Light
GU10

- Suitable for GU10 lamps up to 7W
- High quality 316 grade stainless steel construction (JC**17060**)
- Lamps not supplied


JC**17060**



JC**17060ANTH**



IP 44 Rating | Class 1 | 3yr Warranty* | Lamp not supplied | SS Stainless steel | ANTH Anthracite



CODE	DESCRIPTION	LAMP
JC**17060**	Stainless Steel Up/Down Wall Light	GU10 7W LED Max
JC**17060ANTH**	Anthracite Up/Down Wall Light	GU10 7W LED Max

Body: Stainless steel/Anthracite. **Diffuser:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Downward Wall Light
GU10


- Suitable for GU10 lamps up to 7W
- High quality 316 grade stainless steel construction (JC**17061**)
- Lamps not supplied

JC**17061**



JC**17061ANTH**





IP 44 **Rating** | Class 1 | 3yr **Warranty*** | **Lamp not supplied** | SS **Stainless steel** | ANTH **Anthracite**

CODE	DESCRIPTION	LAMP
JC**17061**	Stainless Steel Downward Wall Light	GU10 7W LED Max
JC**17061ANTH**	Anthracite Downward Wall Light	GU10 7W LED Max

Body: Stainless steel/Anthracite. **Diffuser:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Up/Down Wall Light
GU10


- Suitable for GU10 lamps up to 7W
- High quality 316 grade stainless steel construction (JC**17062**)
- Lamps not supplied

JC**17062**



JC**17062ANTH**





IP 44 **Rating** | **Class 1** | 3yr **Warranty*** | **Lamp not supplied** | SS **Stainless steel** | ANTH **Anthracite**

CODE	DESCRIPTION	LAMP
JC**17062**	Stainless Steel Up/Down Wall Light	GU10 7W LED Max
JC**17062ANTH**	Anthracite Up/Down Wall Light	GU10 7W LED Max

Body: Stainless steel/Anthracite. **Diffuser:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Up/Down Wall Light
GU10 PIR


- Suitable for GU10 lamps up to 7W
- High quality 316 grade stainless steel construction (JC**17063**)
- Lamps not supplied

JC**17063**



JC**17063ANTH**





IP 44 **Rating** | Class 1 | 3yr **Warranty*** | **Lamp not supplied** | **Sensing** | SS **Stainless steel** | ANTH **Anthracite**

CODE	DESCRIPTION	LAMP
JC**17063**	Stainless Steel Up/Down Wall Light with PIR	GU10 7W LED Max
JC**17063ANTH**	Anthracite Up/Down Wall Light with PIR	GU10 7W LED Max


Body: Stainless steel/Anthracite. **Diffuser:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Exterior Up/Down Wall Light
GU10

- Suitable for GU10 LED lamps up to 7W
- Lamps not supplied





IP 44 Rating | Class 1 | 3yr Warranty* | Lamp not supplied | ANTH Anthracite

CODE	DESCRIPTION	LAMP
JC**17050ANTH**	Up/Down Square Wall Light GU10	GU10 7W Max


Body: Die-cast aluminium. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Exterior Up/Down Wall Light
GU10

- Suitable for GU10 LED lamps up to 7W
- Lamps not supplied





IP 44 Rating | Class 1 | 3yr Warranty* | Lamp not supplied | ANTH Anthracite

CODE	DESCRIPTION	LAMP
JC**17051ANTH**	Up/Down Curve Wall Light GU10	GU10 7W LED Max

Body: Die-cast aluminium. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.






Surface Mounted Wall/Path Light

- Suitable for interior and exterior applications
- Allows for mounting to an existing wall, without cutting a recess
- Shallow design
- Downward Illumination





IP 65 Rating | Class 2 | 85 CRI: Ra | 3yr Warranty* | 120° Beam | GRY Grey

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17052**	Surface Mount Linear Path Light	4000K	No	2W	102	51
JC**17056**	Surface Mount Linear Path Light	3000K	No	2W	86	43


Body: Polycarbonate. **Diffuser:** Clear polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Surface Mounted Wall/Path Light

- Suitable for interior and exterior applications
- Allows for mounting to an existing wall, without cutting a recess
- Shallow design
- Prismatic Diffuser





IP 65 Rating | Class 2 | 86 CRI: Ra | 3yr Warranty* | 100° Beam | GRY Grey

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17053**	Surface Mount Wall Light Prismatic	4000K	No	4W	364	91
JC**17057**	Surface Mount Wall Light Prismatic	3000K	No	4W	335	83

Body: Polycarbonate. **Diffuser:** Clear polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Surface Mounted Wall/Path Light

- Suitable for interior and exterior applications
- Allows for mounting to an existing wall, without cutting a recess
- Shallow design
- Downward Illumination



IP 65 Rating | Class 2 | 83 CRI: Ra | 3yr Warranty* | 120° Beam | GRY Grey



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17054**	Surface Mount Square Path Light	4000K	No	2W	94	47
JC**17058**	Surface Mount Square Path Light	3000K	No	2W	86	43

Body: Polycarbonate. **Diffuser:** Clear polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Surface Mounted Wall/Path Light

- Suitable for interior and exterior applications
- Allows for mounting to an existing wall, without cutting a recess
- Shallow design
- Downward Illumination



IP 65 Rating | Class 2 | 82 CRI: Ra | 3yr Warranty* | 66° Beam | GRY Grey



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17055**	Surface Mount Round Path Light	4000K	No	2W	65	32.5
JC**17059**	Surface Mount Round Path Light	3000K	No	2W	65	32.5

Body: Polycarbonate. **Diffuser:** Clear polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.





Linear Wall

- Durable die-cast aluminium construction
- Single direction downward wall wash in anthracite
- IP65 weather resistant
- Matching 3000K colour temperature & finish to the Architectural Exterior range

JC**17003**




JC**17005**




JC**17006**






JC17006



JC17005



JC17003



Rating



Class 1



CRI: Ra (JC17003)



CRI: Ra (JC17005)



Warranty*



Beam



Anthracite

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17003**	Linear Wall Large Single Direction	3000K	No	14.4W	1098	76
JC**17005**	Linear Wall Small Single Direction	3000K	No	7.2W	587	82
JC**17006**	Linear Wall Mini Single Direction	3000K	No	4.3W	279	65
JC**17002**	Linear Wall Up/Down Large	3000K	No	19.6W	1818	93
JC**17004**	Linear Wall Up/Down Small	3000K	No	14.7W	1377	94


Body: Die-cast aluminium. **Diffuser:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Surface Mounted Downlight

- Durable die-cast aluminium construction
- Surface mountable up/down downlight
- IP54 protection against dust and moisture
- Matching 3000K colour temperature & finish to the Architectural Exterior range
- Narrow 18° beam angle





IP 54 Rating | Class 1 | 83 CRI: Ra | 3yr Warranty* | 18° Beam | ANTH Anthracite

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17001**	Surface Mounted Downlight	3000K	No	8.9W	580	65

Body: Die-cast aluminium. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.






Cylindrical Up/Down Wall Light
8W

- Durable die-cast aluminium construction
- Surface mountable up/down wall light
- IP54 protection against dust and moisture
- Matching 3000K colour temperature & finish to the Architectural Exterior range



IP 54 Rating | Class 1 | 82 CRI: Ra | 3yr Warranty* | 44° Beam | ANTH Anthracite



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17015**	Cylindrical Up/down 44° beam angle	3000K	No	7.7W	683	89

Body: Die-cast aluminium. **Lens:** Glass.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Cylindrical Up/Down Wall Light
14W

- Durable die-cast aluminium construction
- Surface mountable up/down wall light
- IP54 protection against dust and moisture
- Matching 3000K colour temperature & finish to the Architectural Exterior range



IP 54 Rating | Class 1 | 83 CRI: Ra | 3yr Warranty* | 18° Beam | ANTH Anthracite



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17016**	Cylindrical Up/down 18° beam angle	3000K	No	15.9W	1209	76


Body: Die-cast aluminium. **Lens:** Glass.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Rectangular Up/Down Wall Light

- Two directional light output
- Durable die-cast aluminium construction
- IP54 protection against dust and moisture
- Matching 3000K colour temperature & finish to the Architectural Exterior range







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17011**	Rectangular Up/Down Wall Light	3000K	No	16W	1116	70


Body: Die-cast aluminium. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Up/Down Wall Light

- Durable die-cast aluminium construction
- IP65 ingress protection
- Matching 3000K colour temperature & finish to the Architectural Exterior range





IP 65 Rating | Class 1 | 80 CRI: Ra | 3yr Warranty* | 28° Beam | IK 09 Rating | ANTH Anthracite

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17017**	Up/Down Wall Light	3000K	No	18W	600	33

Body: Die-cast aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.






Up/Down Light Box

- Durable die-cast aluminium construction
- Surface mountable up/down wall light
- IP54 protection against dust and moisture
- Matching 3000K colour temperature & finish to the Architectural Exterior range



IP 54 Rating | Class 1 | 80 CRI: Ra | 3yr Warranty* | 96° Beam | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17010WH**	Up/Down Box	3000K	No	5W	160	32


Body: Die-cast aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Up/Down Wall Light GU10

- Durable die-cast aluminium construction
- Surface mountable up down wall light
- LED wall light with matching finish to the Architectural Exterior range
- Lamps not supplied





IP 65 **Rating** | **Class 1** | 3yr **Warranty*** | **Lamp not supplied** | ANTH **Anthracite**

CODE	DESCRIPTION	LAMP
JC**17035**	Up/Down Wall Light	2 x 5W GU10 LED Max

Body: Die-cast aluminium. **Lens:** Glass. | Lamps not supplied.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Wall Spot

- Durable die-cast aluminium construction
- IP65 protection weather resistant
- Matching 3000K colour temperature & finish to the Architectural Exterior range







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17043**	Wall Spot	3000K	No	10.1W	700	69


Body: Die-cast aluminium. **Lens:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Frosted Glazed Lantern

- Matching 3000K colour temperature & finish to the Architectural Exterior range





IP 54 Rating | Class 1 | 80 CRI: Ra | 3yr Warranty* | ANTH Anthracite

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17008**	Frosted Glazed Lantern	3000K	No	18W	700	39


Body: Aluminium. **Diffuser:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Glazed Lantern Mini

- Rubber gasket to maintain IP54 rating
- High quality aluminium and glass construction
- Designed for use with E27 LED lamps
- PIR option available
- Suitable for interior and exterior applications





IP 54 **Rating** | Class 1 | 3yr **Warranty*** | **Lamp not supplied** | **Sensing** | ANTH **Anthracite**

CODE	DESCRIPTION	LAMP
JC**17037BLK**	Glazed Lantern Mini	E27 15W LED Max

Body: Aluminium. **Diffuser:** Glass. | Lamp not supplied.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.




NiteLED™

E27 Dome Wall Lights

- Matching bollard available, see p.498-502





IP 44 Rating | Class 1 | 2yr Guarantee | Lamp not supplied | BLK Black


CODE	DESCRIPTION	LAMP
JC**39223BLK**	NiteLED Dome Wall Light E27 Black - Plain	E27 25W LED Max

Body: Aluminium. **Lens:** Polycarbonate.

NiteLED™
E27 Dome Wall Lights

- Matching bollard available, see p.499-503





IP 44 Rating | Class 1 | 2yr Guarantee | Lamp not supplied | BLK Black

CODE	DESCRIPTION	LAMP
JC**39222BLK**	NiteLED Dome Wall Light E27 Black - Louvred	E27 25W LED Max

Body: Aluminium. **Lens:** Polycarbonate.






GU10 Inground
Spike Spotlight

- Suitable for GU10 LED lamps up to 7W
- Fully adjustable for multiple applications
- Supplied pre-wired with 1m flex
- Durable polycarbonate spike
- Suitable for wall mounting once spike is removed





IP 65 **Rating** | **Class 1** | 3yr **Warranty*** | **Lamp not supplied** | ANTH **Anthracite**

CODE	DESCRIPTION	LAMP
JC**17049**	Architectural Spike Light	GU10 7W LED Max


Body: Aluminium. **Spike:** Polycarbonate. **Lens:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

GU10 Stainless Steel
Garden Spike Light

- Suitable for GU10 LED lamps up to 7W
- High quality 316 grade stainless steel construction, suitable for use in coastal areas
- Supplied pre-wired with 500mm flex
- Lamp not supplied





IP 44 Rating | Class 1 | 3yr Warranty* | Lamp not supplied | SS Stainless steel

CODE	DESCRIPTION	LAMP
JC**17064**	Stainless Steel Garden Spike Light	GU10 7W LED Max

Body: 316 Grade Stainless steel. **Lens:** Glass.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Inground
Spike Spotlight


- Durable die-cast aluminium construction
- IP65 protection against dust and moisture
- Supplied pre-wired with 900mm flex
- Narrow 41° beam angle







JC17044



JC17045

IP 65 **Rating** | Class 1 | 84 **CRI: Ra** | 3yr **Warranty*** | 41° **Beam** | ANTH **Anthracite**

CODE	DESCRIPTION	COL TEMP.	DIM	WATT	LUMENS	LPCW
JC**17044**	Inground Spike Spotlight short	3000K	No	10.1W	700	69
JC**17045**	Inground Spike Spotlight tall	3000K	No	10.1W	700	69

Body: Aluminium. **Lens:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Inground
Quad Direction

- Durable die-cast aluminium construction
- IP67 protection against dust and moisture
- Supplied pre-wired with 900mm flex







IP 67 Rating | Class 1 | 84 CRI: Ra | 3yr Warranty* | 70° Beam | ANTH Anthracite

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS
JC**17028**	Inground Quad-Direction	3000K	No	9W	227

Body: Aluminium. **Diffuser:** Glass.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Floodlights

Niteflood® 444

Toughflood™ Pro 456

Toughflood™ Pro Marine 466

Toughflood™ 472

Toughflood™ Asymmetric 478



Niteflood®

High performance range of domestic floodlights

IP65 ACROSS FULL FITTING INCLUDING PIR



BREATHER GLAND TO AVOID CONDENSATION



PIR DETECTS MOVEMENT BETWEEN 5-10M* AWAY



*Detection distance will vary depending on installation height

Clear access to fixing points

The 60° angled bracket is specifically designed to provide clear access to fixing points for an easy installation.





Breather gland protects against water ingress

Niteflood® incorporates a breather gland to maintain IP rating and stop moisture entering the fitting.





IP65 rated and neutral salt spray corrosion tested

Niteflood® is IP65 and corrosion resistant, and has been independently ISO9227:2022 Neutral salt spray corrosion tested.

CCT options now available, choose either 3000K, 4000K & 5700K


A simple switch on Niteflood® fittings allows users to choose between 3000K,4000K & 5700K colour temperatures.

Niteflood®

10W

- IP65 protection against dust and moisture
- Angled bracket for ease of installation
- Independently tested to ISO09227:2022 neutral salt spray corrosion testing
- Breather gland incorporated to protect against water ingress
- Opal glass for reduced glare
- Supplied pre-wired with 800mm flex






60° angled bracket



White finish available

IP 65 Rating | Class 1 | 83 CRI: Ra | 3yr Warranty* | 100° Beam | BLK Black | WH White



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**091001**	Niteflood Black	4000K	No	10W	1000	100
JC**091009**	Niteflood White	4000K	No	10W	1000	100

Body: Aluminium. **Lens:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Niteflood®

10W IP65 PIR

- IP65 protection of full fitting, including PIR
- Manual override function
- Breather gland protects against condensation
- Opal glass for reduced glare
- Angled bracket for ease of installation
- Supplied pre-wired with 800mm flex
- Independently tested to ISO09227:2022 neutral salt spray corrosion testing
- 10 - 2000 Lux adjustable
- 10sec to 7min adjustable 'on' time
- 180° detection
- 1.8m to 2.5m mounting height
- 10m detection at 2.5m





60° angled bracket



White finish available

IP 65 **Rating**

Class 1

83 **CRI: Ra**


3yr **Warranty***

100° **Beam**

Sensing options

BLK **Black**

WH **White**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**091002**	Niteflood PIR Black	4000K	No	10W	1000	100
JC**091010**	Niteflood PIR White	4000K	No	10W	1000	100

Body: Aluminium. **Lens:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Niteflood®

20W

- CCT selectable options available
- IP65 protection against dust and moisture
- Angled bracket for ease of installation
- Independently tested to ISO09227:2022 neutral salt spray corrosion testing
- Breather gland incorporated to protect against water ingress
- Opal glass for reduced glare
- Supplied pre-wired with 800mm flex





60° angled bracket




White finish available (JC**091011**)



CCT colour switchable (JC**091019**)

IP 65 **Rating** | **Class 1** | **Colour switchable** | 83 **CRI: Ra** | 3yr **Warranty*** | 100° **Beam** | BLK **Black** | WH **White**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**091003**	Niteflood Black	4000K	No	20W	2100	105
JC**091011**	Niteflood White	4000K	No	20W	2100	105
JC**091019**	Niteflood CCT Black	3000K/4000K/5700K	No	20W	2100	105

Body: Aluminium. **Lens:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Niteflood®

20W IP65 PIR

- CCT selectable options available
- IP65 protection of full fitting, including PIR
- Manual override function
- Breather gland protects against condensation
- Opal glass for reduced glare
- Angled bracket for ease of installation
- Supplied pre-wired with 800mm flex
- Independently tested to ISO09227:2022 neutral salt spray corrosion testing
- 10 - 2000 Lux adjustable
- 10sec to 7min adjustable 'on' time
- 180° detection
- 1.8m to 2.5m mounting height
- 10m detection at 2.5m





60° angled bracket



White finish available (JC**091012**)



CCT colour switchable (JC**091020**)

IP 65 **Rating**

Class 1

Colour switchable

83 **CRI: Ra**


3yr **Warranty***

100° **Beam**

Sensing options

BLK **Black**

WH **White**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**091004**	Niteflood PIR Black	4000K	No	20W	2100	105
JC**091012**	Niteflood PIR White	4000K	No	20W	2100	105
JC**091020**	Niteflood CCT PIR Black	3000K/4000K/5700K	No	20W	2100	105

Body: Aluminium. **Lens:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Niteflood®

30W

- CCT selectable options available
- IP65 protection against dust and moisture
- Angled bracket for ease of installation
- Independently tested to ISO09227:2022 neutral salt spray corrosion testing
- Breather gland incorporated to protect against water ingress
- Opal glass for reduced glare
- Supplied pre-wired with 800mm flex





60° angled bracket




White finish available (JC**091013**)



CCT colour switchable (JC**091021**)

IP 65 **Rating** | **Class 1** | **Colour switchable** | 83 **CRI: Ra** | 3yr **Warranty*** | 100° **Beam** | BLK **Black** | WH **White**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**091005**	Niteflood Black	4000K	No	30W	3200	107
JC**091013**	Niteflood White	4000K	No	30W	3200	107
JC**091021**	Niteflood CCT Black	3000K/4000K/5700K	No	30W	3200	107

Body: Aluminium. **Lens:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Niteflood®

30W IP65 PIR

- CCT selectable options available
- IP65 protection of full fitting, including PIR
- Manual override function
- Breather gland protects against condensation
- Opal glass for reduced glare
- Angled bracket for ease of installation
- Supplied pre-wired with 800mm flex
- Independently tested to ISO09227:2022 neutral salt spray corrosion testing
- 10 - 2000 Lux adjustable
- 10sec to 7min adjustable 'on' time
- 180° detection
- 1.8m to 2.5m mounting height
- 10m detection at 2.5m





60° angled bracket



White finish available (JC**091014**)



CCT colour switchable (JC**091022**)

IP 65 **Rating**

Class 1

Colour switchable

83 **CRI: Ra**


3yr **Warranty***

100° **Beam**

Sensing options

BLK **Black**

WH **White**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**091006**	Niteflood PIR Black	4000K	No	30W	3200	107
JC**091014**	Niteflood PIR White	4000K	No	30W	3200	107
JC**091022**	Niteflood CCT PIR Black	3000K/4000K/5700K	No	30W	3200	107

Body: Aluminium. **Lens:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Niteflood®

50W

- CCT selectable options available
- IP65 protection against dust and moisture
- Angled bracket for ease of installation
- Independently tested to ISO09227:2022 neutral salt spray corrosion testing
- Breather gland incorporated to protect against water ingress
- Opal glass for reduced glare
- Supplied pre-wired with 800mm flex





60° angled bracket




White finish available (JC**091015**)



CCT colour switchable (JC**091023**)

IP 65 **Rating** | Class 1 | **Colour switchable** | 83 **CRI: Ra** | 3yr **Warranty*** | 100° **Beam** | BLK **Black** | WH **White**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**091007**	Niteflood Black	4000K	No	50W	5600	112
JC**091015**	Niteflood White	4000K	No	50W	5600	112
JC**091023**	Niteflood CCT Black	3000K/4000K/5700K	No	50W	5600	112

Body: Aluminium. **Lens:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Niteflood®

50W IP65 PIR

- CCT selectable options available
- IP65 protection of full fitting, including PIR
- Manual override function
- Breather gland protects against condensation
- Opal glass for reduced glare
- Angled bracket for ease of installation
- Supplied pre-wired with 800mm flex
- Independently tested to ISO09227:2022 neutral salt spray corrosion testing
- 10 - 2000 Lux adjustable
- 10sec to 7min adjustable 'on' time
- 180° detection
- 1.8m to 2.5m mounting height
- 10m detection at 2.5m





60° angled bracket



White finish available (JC**091016**)



CCT colour switchable (JC**091024**)

IP 65 **Rating**

Class 1

Colour switchable

83 **CRI: Ra**


3yr **Warranty***

100° **Beam**

Sensing options

BLK **Black**

WH **White**



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**091008**	Niteflood PIR Black	4000K	No	50W	5600	112
JC**091016**	Niteflood PIR White	4000K	No	50W	5600	112
JC**091024**	Niteflood CCT PIR Black	3000K/4000K/5700K	No	50W	5600	112


Body: Aluminium. **Lens:** Toughened Glass. **Bracket:** Galvanised Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ range

Built for performance in every space



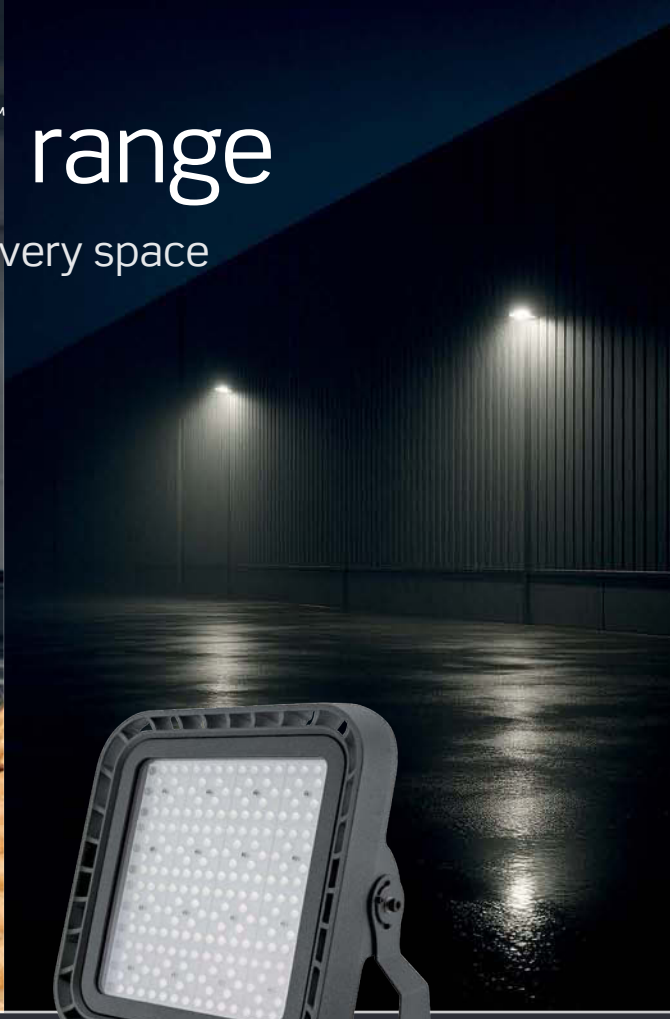

Toughflood™ **Commercial**

FOOD PREP AREAS AND COMMERCIAL BUILDINGS

Toughflood™ Commercial features a polycarbonate lens, ideal for environments such as food preparation areas and commercial buildings.

- Polycarbonate lens
- 110° beam angle

See p.472

Toughflood™ **Asymmetric**

ASYMMETRIC LENS ALLOWS FOR WIDE SPACING

Toughflood™ Asymmetric is our original die-cast aluminium floodlight, designed for wide spacing so fewer are needed. Ideal for commercial sites and light-sensitive areas.

- Die-cast aluminium construction
- 80° x 150° asymmetric beam angle

See p.478



Toughflood™ **Pro**

HARSH COASTAL AND INDUSTRIAL ENVIRONMENTS

Toughflood Pro™ and Pro Asymmetric share the same body with a glass lens, allowing seamless use together. Toughflood™ Pro's Asymmetric directional lens reduces light spill.

- 60 hour salt spray tested
- Symmetric and asymmetric options

See p.456



Toughflood™ **Pro Marine**

HEAVY-DUTY MARINE AND COASTAL AREAS

Built for tough environments, Toughflood™ Pro Marine is salt spray and chlorine tested for 1000 hours to replicate harsh coastal conditions, ensuring lasting performance.

- 1000 hour salt spray and chlorine tested
- 125° x 30° asymmetric beam angle

See p.466

NEW

Toughflood™ Pro

Ultra durable, high output commercial floodlight

180° TILTABLE BRACKET



BREATHER GLAND TO AVOID CONDENSATION



INTEGRATED THERMAL MANAGEMENT CONTROL



Also available in asymmetric (120° x 65° beam angle)

Flexible positioning with 180° tiltable bracket

The 180° tiltable bracket provides control, allowing the installer to position the fitting to light the specified area.



60 hour salt spray tested

Toughflood Pro has been rigorously tested to ensure long-lasting durability in harsh environments and meets the requirements of ISO 9227:2022, having undergone a 60 hour salt spray test.



70W
Up to 8,800 lumens

100W
Up to 12,750 lumens

150W
Up to 19,200 lumens


200W
Up to 24,500 lumens

Toughflood™ Pro
Symmetric 70W

NEW

- Adjustable 180° tiltable bracket
- Pre-wired with 1m flex
- IP65 and IK07 protection





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 07 Rating | 110° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050010**	Toughflood Pro	4000K	No	70W	8300	119

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro
Symmetric 100W

NEW

- Adjustable 180° tiltable bracket
- Pre-wired with 1m flex
- IP65 and IK08 protection





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | 110° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050011**	Toughflood Pro	4000K	No	100W	11700	117

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro
Symmetric 150W

NEW

- Adjustable 180° tiltable bracket
- Pre-wired with 1m flex
- IP65 and IK08 protection





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | 110° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050012**	Toughflood Pro	4000K	No	150W	17450	116

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro
Symmetric 200W

NEW

- Adjustable 180° tiltable bracket
- Pre-wired with 1m flex
- IP65 and IK08 protection





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | 110° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050013**	Toughflood Pro	4000K	No	200W	23600	118

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro
Asymmetric 70W

NEW

- Asymmetric lens design ensures complete control of light direction
- Adjustable 180° tiltable bracket
- 120°×65° beam for focused illumination
- Pre-wired with 1m flex
- IP65 and IK07 protection





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 07 Rating | 120° x 65° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050014**	Toughflood Pro Asymmetric	4000K	No	70W	8800	126

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro
Asymmetric 100W

NEW

- Asymmetric lens design ensures complete control of light direction
- Adjustable 180° tiltable bracket
- 120°×65° beam for focused illumination
- Pre-wired with 1m flex
- IP65 and IK08 protection





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | 120° x 65° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050015**	Toughflood Pro Asymmetric	4000K	No	100W	12750	128

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro
Asymmetric 150W

NEW

- Asymmetric lens design ensures complete control of light direction
- Adjustable 180° tiltable bracket
- 120°×65° beam for focused illumination
- Pre-wired with 1m flex
- IP65 and IK08 protection





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | 120° x 65° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050016**	Toughflood Pro Asymmetric	4000K	No	150W	19200	128

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro
Asymmetric 200W

NEW

- Asymmetric lens design ensures complete control of light direction
- Adjustable 180° tiltable bracket
- 120°×65° beam for focused illumination
- Pre-wired with 1m flex
- IP65 and IK08 protection





IP 65 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 08 Rating | 120° x 65° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050017**	Toughflood Pro Asymmetric	4000K	No	200W	25000	125

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

NEW

Toughflood™ Pro Marine

Designed and tested for harsh environments


125° X 30° ASYMMETRIC BEAM ANGLE



BREATHER GLAND TO AVOID WATER INGRESS



COLOUR & WATTAGE SELECTABLE OPTIONS



Salt spray & corrosion resistance test

Toughflood Pro Marine has passed a 1000-hour salt spray and chlorine corrosion test, a critical benchmark for fixtures used in environments with high exposure to moisture, salt, and chemicals. Ideal for challenging applications such as ports, marinas, swimming pools, industrial plants, and coastal infrastructure.



Photocell as standard


Toughflood Pro Marine features a built-in adjustable photocell sensor that automatically activates the luminaire, removing the need for manual switching or external controls. The adjustable sensor allows users to set activation at both low and high lux levels.

Toughflood™ Pro Marine
100W/150W/200W

NEW

- Wattage and CCT selectable
- 125° x 30° beam angle allows for wider fitting spacing, reducing amount of fittings required
- 1000 hour salt spray and corrosion resistance tested
- Pre-wired with 1.4m flex
- IP65 and IK08 protection
- Photocell as standard





IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 70 CRI: Ra | 5yr Warranty* | IK 08 Rating | 125° x 30° Beam | Sensing options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050021**	Toughflood Pro Marine	3000K/4000K/5700K	No	100W/150W/200W	15600/23400/30320	156

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro Marine
150W/225W/300W

NEW

- Wattage and CCT selectable
- 125° x 30° beam angle allows for wider fitting spacing, reducing amount of fittings required
- 1000 hour salt spray and corrosion resistance tested
- Pre-wired with 1.4m flex
- IP65 and IK08 protection
- Photocell as standard





IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 70 CRI: Ra | 5yr Warranty* | IK 08 Rating | 125° x 30° Beam | Sensing options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050022**	Toughflood Pro Marine	3000K/4000K/5700K	No	150W/225W/300W	23530/35290/45250	157

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Pro Marine
200W/300W/400W

NEW

- Wattage and CCT selectable
- 125° x 30° beam angle allows for wider fitting spacing, reducing amount of fittings required
- 1000 hour salt spray and corrosion resistance tested
- Pre-wired with 1.4m flex
- IP65 and IK08 protection
- Photocell as standard





IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 70 CRI: Ra | 5yr Warranty* | IK 08 Rating | 125° x 30° Beam | Sensing options

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050023**	Toughflood Pro Marine	3000K/4000K/5700K	No	200W/300W/400W	32420/48630/60340	162

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


Toughflood™ Pro Marine
Pole Mounting Adapter

NEW



5yr
Warranty*

GRY
Grey



CODE	DESCRIPTION
JC**050040**	Toughflood Pro Marine 42mm Pole Mounting Adapter
JC**050041**	Toughflood Pro Marine 60mm Pole Mounting Adapter
JC**050042**	Toughflood Pro Marine 76mm Pole Mounting Adapter

Body: Galvanised Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.



Toughflood™

High output commercial LED floodlight







Ultra durable with driverless technology

Toughflood™ is our high output commercial LED floodlight which is a direct replacement for HID equivalents. Toughflood™ has been designed with a galvanised bracket and an integrated heat sink that can effectively control thermal management, improving performance and reliability.



70W
10,000 lumens



100W
10,800 lumens



150W
16,300 lumens




200W
21,800 lumens

Toughflood™
70W

- Durable IK08 rating
- Polycarbonate diffuser, suitable for food preparation
- 55° angled bracket, for easy installation
- Driverless technology
- Pre-wired with 2m flex





IP 65 Rating | Class 1 | 70 CRI: Ra | 3yr Warranty* | IK 08 Rating | 4000K Colour temp. | 110° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050005**	Toughflood	4000K	No	70W	10,000	143


Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Galvanised Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™
100W

- Durable IK08 rating
- Polycarbonate diffuser, suitable for food preparation
- 55° angled bracket, for easy installation
- Driverless technology
- Pre-wired with 2m flex





IP 65 Rating | Class 1 | 70 CRI: Ra | 3yr Warranty* | IK 08 Rating | 4000K Colour temp. | 110° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050006**	Toughflood	4000K	No	100W	10,800	108

Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™
150W

- Durable IK08 rating
- Polycarbonate diffuser, suitable for food preparation
- 55° angled bracket, for easy installation
- Driverless technology
- Pre-wired with 2m flex



IP 65 Rating | Class 1 | 70 CRI: Ra | 3yr Warranty* | IK 08 Rating | 4000K Colour temp. | 110° Beam | BLK Black



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC050007	Toughflood	4000K	No	150W	16,300	109


Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Galvanised Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™
200W

- Durable IK08 rating
- Polycarbonate diffuser, suitable for food preparation
- 55° angled bracket, for easy installation
- Driverless technology
- Pre-wired with 2m flex







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050008**	Toughflood	4000K	No	200W	21,800	109

Body: Aluminium. **Lens:** Polycarbonate. **Bracket:** Galvanised Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™ Asymmetric

Maximum performance, maximum control

DURABLE IK08 IMPACT RATING



60° ASYMMETRIC LENS



180° TILTABLE BRACKET





Precise directional control

Toughflood™ Asymmetric has been engineered with complete control in mind. The asymmetric lenses control the light and direct it towards the ground. This ensures that all light is used efficiently and minimises light pollution. The 180° tiltable bracket provides further control, allowing the installer to position the fitting to light the specified area.



80W & 100W
Up to 11,400 lumens
150W HID equivalent



150W
17,000 lumens
250W HID equivalent




200W
24,000 lumens
400W HID equivalent

Toughflood™
Asymmetric 80W

- Asymmetric lens design ensures complete control of light direction
- Instant start-up for use with occupancy sensors
- Ideal for mounting heights of up to 6m
- 80° x 150° beam angle







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050001**	Toughflood Asymmetric	4000K	No	80W	9200	115

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™
Asymmetric 100W

- Asymmetric lens design ensures complete control of light direction
- Instant start-up for use with occupancy sensors
- Ideal for mounting heights of up to 6m
- 80° x 150° beam angle



IP 65 Rating | Class 1 | 70 CRI: Ra | 5yr Warranty* | 80° x 150° Beam | IK 08 Rating | GRY Grey



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050002**	Toughflood Asymmetric	4000K	No	100W	11400	114

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™
Asymmetric 150W

- Asymmetric lens design ensures complete control of light direction
- Instant start-up for use with occupancy sensors
- Ideal for mounting heights of up to 8m
- 80° x 150° beam angle







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050003**	Toughflood Asymmetric	4000K	No	150W	17000	113

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Toughflood™
Asymmetric 200W

- Asymmetric lens design ensures complete control of light direction
- Instant start-up for use with occupancy sensors
- Ideal for mounting heights of up to 10m
- 80° x 150° beam angle







CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**050004**	Toughflood Asymmetric	4000K	No	200W	24000	120

Body: Aluminium. **Diffuser:** Toughened Glass. **Bracket:** Galvanised Steel.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Bollards

Radial Bollard 488

Louvred Bollard 490

Downward Bollard 492

Commercial Bollard 494

NiteLED™ E27 Dome Bollard 498

NEW

Bollards

Colour and wattage selectable exterior lighting

THREE WATTAGE & FOUR COLOUR SELECTABLE



MATCHING WALL LIGHTS AVAILABLE



INCLUDES COMBI BY WISKA® JUNCTION BOX



Versatile range with selectable colour temperature and output

A flexible bollard range available in 600mm and 1000mm heights, with three head options. Designed for wide spacing to minimise the number of fittings required, as specified by lighting designers.



Radial Bollard
600mm

NEW

- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Three wattage selectable 12W, 16W & 20W
- Remote control for PIR settings available (LEV**71980**)
- Root mounting kit available (JC**039025**)
- Supplied as standard with photocell that can be disabled
- Matching wall light available, see p.400




Includes **COMBI** by WISKA® junction box




Matching wall light available (JC**039030**)



IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 5yr Warranty* | Emergency options | BLK Black

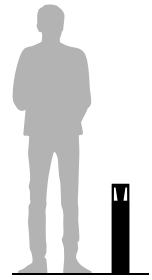



CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**039001**	Bollard Photocell	No	12W/16W/20W	810/1060/1320
JC**039002**	Bollard Photocell Emergency	No	12W/16W/20W	810/1060/1320
JC**039003**	Bollard PIR Sensor	No	12W/16W/20W	810/1060/1320
LEV**71980**	Bollard PIR Remote Control (battery not supplied)	-	-	-
JC**039025**	Bollard Root Mounting Kit	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Radial Bollard
1000mm

NEW

- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Three wattage selectable 12W, 16W & 20W
- Remote control for PIR settings available (LEV**71980**)
- Root mounting kit available (JC**039025**)
- Supplied as standard with photocell that can be disabled
- Matching wall light available, see p.400





Includes **COMBI** by WISKA® junction box



Matching wall light available (JC**039030**)







IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 5yr Warranty* | Emergency options | BLK Black

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**039005**	Bollard Photocell	No	12W/16W/20W	810/1060/1320
JC**039006**	Bollard Photocell Emergency	No	12W/16W/20W	810/1060/1320
JC**039007**	Bollard PIR Sensor	No	12W/16W/20W	810/1060/1320
LEV**71980**	Bollard PIR Remote Control (battery not supplied)	-	-	-
JC**039025**	Bollard Root Mounting Kit	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Louvred Bollard
600mm

NEW

- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Three wattage selectable 12W, 16W & 20W
- Remote control for PIR settings available (LEV**71980**)
- Root mounting kit available (JC**039025**)
- Supplied as standard with photocell that can be disabled
- Matching wall light available, see p.402





Includes **COMBI** by WISKA® junction box



Matching wall light available (JC**039031**)







IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 5yr Warranty* | Emergency options | BLK Black

CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**039009**	Bollard Photocell	No	12W/16W/20W	550/740/880
JC**039010**	Bollard Photocell Emergency	No	12W/16W/20W	550/740/880
JC**039011**	Bollard PIR Sensor	No	12W/16W/20W	550/740/880
LEV**71980**	Bollard PIR Remote Control (battery not supplied)	-	-	-
JC**039025**	Bollard Root Mounting Kit	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Louvred Bollard
1000mm

NEW

- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Three wattage selectable 12W, 16W & 20W
- Remote control for PIR settings available (LEV**71980**)
- Root mounting kit available (JC**039025**)
- Supplied as standard with photocell that can be disabled
- Matching wall light available, see p.402




Includes **COMBI** by WISKA® junction box




Matching wall light available (JC**039031**)



IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 5yr Warranty* | Emergency options | BLK Black





CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**039013**	Bollard Photocell	No	12W/16W/20W	550/740/880
JC**039014**	Bollard Photocell Emergency	No	12W/16W/20W	550/740/880
JC**039015**	Bollard PIR Sensor	No	12W/16W/20W	550/740/880
LEV**71980**	Bollard PIR Remote Control (battery not supplied)	-	-	-
JC**039025**	Bollard Root Mounting Kit	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Downward Bollard
600mm

NEW

- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Three wattage selectable 12W, 16W & 20W
- Remote control for PIR settings available (LEV**71980**)
- Root mounting kit available (JC**039025**)
- Supplied as standard with photocell that can be disabled
- Matching wall light available, see p.403




Includes **COMBI** by WISKA® junction box




Matching wall light available (JC**039032**)



IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 5yr Warranty* | Emergency options | BLK Black





CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**039017**	Bollard Photocell	No	12W/16W/20W	1050/1360/1700
JC**039018**	Bollard Photocell Emergency	No	12W/16W/20W	1050/1360/1700
JC**039019**	Bollard PIR Sensor	No	12W/16W/20W	1050/1360/1700
LEV**71980**	Bollard PIR Remote Control (battery not supplied)	-	-	-
JC**039025**	Bollard Root Mounting Kit	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Downward Bollard
1000mm

NEW

- Four colour selectable 2700K, 3000K, 4000K & 5700K
- Three wattage selectable 12W, 16W & 20W
- Remote control for PIR settings available (LEV**71980**)
- Root mounting kit available (JC**039025**)
- Supplied as standard with photocell that can be disabled
- Matching wall light available, see p.403




Includes **COMBI** by WISKA® junction box




Matching wall light available (JC**039032**)



IP 65 Rating | Class 1 | Colour switchable | Wattage switchable | 5yr Warranty* | Emergency options | BLK Black





CODE	DESCRIPTION	DIM.	WATT	LUMENS
JC**039021**	Bollard Photocell	No	12W/16W/20W	1050/1360/1700
JC**039022**	Bollard Photocell Emergency	No	12W/16W/20W	1050/1360/1700
JC**039023**	Bollard PIR Sensor	No	12W/16W/20W	1050/1360/1700
LEV**71980**	Bollard PIR Remote Control (battery not supplied)	-	-	-
JC**039025**	Bollard Root Mounting Kit	-	-	-


Body: Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Commercial Bollard
14W 500mm

- Bi-directional output, including optional side cover (JC**17077** - sold separately) for single direction option*
- IK10 & IP66 rated, designed for tough conditions
- -40°C to +50°C operating temperature
- Ideal for commercial pathways & perimeter building illumination
- Supplied with 'J' bolts for concrete installations







IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | 65° Beam | 70° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17078**	Commercial Bollard 500mm	4000K	No	14W	1190	85
JC**17077**	Side cover accessory	-	-	-	-	-
JC**17082**	Soft ground root mount kit	-	-	-	-	-


Body: Die-cast Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Commercial Bollard
24W 500mm

- Bi-directional output, including optional side cover (JC**17077** - sold separately) for single direction option*
- IK10 & IP66 rated, designed for tough conditions
- -40°C to +50°C operating temperature
- Ideal for commercial pathways & perimeter building illumination
- Supplied with 'J' bolts for concrete installations







IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | 65° Beam | 70° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17080**	Commercial Bollard 500mm	4000K	No	24W	1990	83
JC**17077**	Side cover accessory	-	-	-	-	-
JC**17082**	Soft ground root mount kit	-	-	-	-	-


Body: Die-cast Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Commercial Bollard
14W 900mm

- Bi-directional output, including optional side cover (JC**17077** - sold separately) for single direction option*
- IK10 & IP66 rated, designed for tough conditions
- -40°C to +50°C operating temperature
- Ideal for commercial pathways & perimeter building illumination
- Supplied with 'J' bolts for concrete installations







IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | 65° Beam | 70° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17079**	Commercial Bollard 900mm	4000K	No	14W	1190	85
JC**17077**	Side cover accessory	-	-	-	-	-
JC**17082**	Soft ground root mount kit	-	-	-	-	-


Body: Die-cast Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.

Commercial Bollard
24W 900mm

- Bi-directional output, including optional side cover (JC**17077** - sold separately) for single direction option*
- IK10 & IP66 rated, designed for tough conditions
- -40°C to +50°C operating temperature
- Ideal for commercial pathways & perimeter building illumination
- Supplied with 'J' bolts for concrete installations







IP 66 Rating | Class 1 | 80 CRI: Ra | 5yr Warranty* | IK 10 Rating | 65° Beam | 70° Beam | BLK Black

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**17081**	Commercial Bollard 900mm	4000K	No	24W	1990	83
JC**17077**	Side cover accessory	-	-	-	-	-
JC**17082**	Soft ground root mount kit	-	-	-	-	-

Body: Die-cast Aluminium. **Diffuser:** Polycarbonate.


*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.


NiteLED™

E27 Dome Bollard 475mm

- Root mounting kit available (JC**39224**)
- Matching wall light available, see p.434







IP 44 **Rating** | **Class 1** | 2yr **Guarantee** | **Lamp not supplied** | BLK **Black**

CODE	DESCRIPTION	LAMP
JC**39211BLK**	Short Dome Bollard (475mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: Aluminium. **Diffuser:** Polycarbonate.


NiteLED™

E27 Dome Bollard 475mm Louvred

- Root mounting kit available (JC**39224**)
- Matching wall light available, see p.435







IP 44 **Rating** | **Class 1** | 2yr **Guarantee** | **Lamp not supplied** | BLK **Black**

CODE	DESCRIPTION	LAMP
JC**39201BLK**	Short Louvred Bollard (475mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: Aluminium. **Diffuser:** Polycarbonate.

NiteLED™

E27 Dome Bollard 775mm

- Root mounting kit available (JC**39224**)
- Matching wall light available, see p.434





IP 44 Rating | Class 1 | 2yr Guarantee | Lamp not supplied | BLK Black

CODE	DESCRIPTION	LAMP
JC**39212BLK**	Medium Dome Bollard (775mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: Aluminium. **Diffuser:** Polycarbonate.


NiteLED™

E27 Dome Bollard 775mm Louvred

- Root mounting kit available (JC**39224**)
- Matching wall light available, see p.435







IP 44 **Rating** | **Class 1** | 2yr **Guarantee** | **Lamp not supplied** | BLK **Black**

CODE	DESCRIPTION	LAMP
JC**39202BLK**	Medium Louvred Bollard (775mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: Aluminium. **Diffuser:** Polycarbonate.

NiteLED™

E27 Dome Bollard 1275mm

- Root mounting kit available (JC**39224**)
- Matching wall light available, see p.434





IP 44 Rating | Class 1 | 2yr Guarantee | Lamp not supplied | BLK Black

CODE	DESCRIPTION	LAMP
JC**39213BLK**	Tall Dome Bollard (1275mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: Aluminium. **Diffuser:** Polycarbonate.


NiteLED™

E27 Dome Bollard 1275mm Louvred

- Root mounting kit available (JC**39224**)
- Matching wall light available, see p.435







IP 44 **Rating** | **Class 1** | 2yr **Guarantee** | **Lamp not supplied** | BLK **Black**

CODE	DESCRIPTION	LAMP
JC**39203BLK**	Tall Louvred Bollard (1275mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: Aluminium. **Diffuser:** Polycarbonate.


NiteLED™

E27 Dome Bollard 475mm

- Root mounting kit available (JC**39224**)







IP 44 Rating | Class 1 | 2yr Guarantee | Lamp not supplied | SS Stainless steel

CODE	DESCRIPTION	LAMP
JC**39211SS**	Short Dome Bollard (475mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: 316 Stainless Steel. **Diffuser:** Polycarbonate.


NiteLED™

E27 Dome Bollard 475mm Louvred

- Root mounting kit available (JC**39224**)







IP 44 Rating | Class 1 | 2yr Guarantee | Lamp not supplied | SS Stainless steel

CODE	DESCRIPTION	LAMP
JC**39201SS**	Short Louvred Bollard (475mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: 316 Stainless Steel. **Diffuser:** Polycarbonate.

NiteLED™

E27 Dome Bollard 775mm

- High quality 316 stainless steel construction
- Root mounting kit available (JC**39224**)





IP 44 Rating | Class 1 | 2yr Guarantee | Lamp not supplied | SS Stainless steel

CODE	DESCRIPTION	LAMP
JC**39212SS**	Medium Dome Bollard (775mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-


Body: 316 Stainless Steel. **Diffuser:** Polycarbonate.


NiteLED™

E27 Dome Bollard 775mm Louvred

- High quality 316 stainless steel construction
- Root mounting kit available (JC**39224**)







IP 44 Rating | Class 1 | 2yr Guarantee | Lamp not supplied | SS Stainless steel

CODE	DESCRIPTION	LAMP
JC**39202SS**	Medium Louvred Bollard (775mm)	E27 25W LED Max or 70W Halogen Max
JC**39224**	Root mounting kit	-

Body: 316 Stainless Steel. **Diffuser:** Polycarbonate.





Controls & Sensors

DALI Range 512

Batten Mount PIR 514

Plug and Play Modular Sensor Pack 516

Sensor Remote Controls 518

Toughbay™ Microwave Remote 520

Toughbay™ Pro Dim Sensors IP65 521

Recessed PIR Sensor 522

PIR Detector 524

Extensive DALI Range

DALI & DALI addressable emergency now available across commercial ranges

AVAILABLE ACROSS JCC COMMERCIAL RANGES



AUTOMATIC REMOTE TESTING & MONITORING



LONG LASTING LITHIUM LIFEPO4 BATTERY



All-in-one DALI solution

JCC now offers a full DALI solution across our commercial ranges, including DALI Addressable Emergency for monitoring and testing DALI and DALI emergency fixtures.

Full DALI solution now available across JCC commercial fittings, including Coral™ LED Plus, Skytile®, Skypack™ Pro, ToughLED™ Pro and RadiaLED® Rapid.



CORAL™ LED PLUS



SKYTILE®



RADIALED® RAPID



SKYPACK™ PRO



TOUGHLED™ PRO



ESCAPELUX™ RANGE



Zero maintenance, no manual testing required

Removes the need to manually test emergency fittings and remotely monitors system status and battery health, saving time and money.



Automatic remote testing and monitoring


The system can be programmed to carry out monthly function and duration tests, and will automatically report if there is a fault.



Batten Mount PIR

Designed for use with JCC LED battens

MOUNTED VIA 20MM CONDUIT ENTRY POINTS

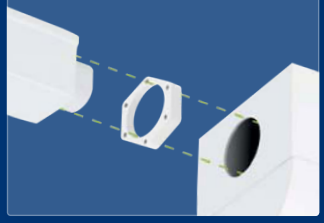

360° DETECTION, UP TO 10M MAXIMUM



IP65 RATED AGAINST DUST & MOISTURE



Batten Mount PIR

- Interchangeable PIR sensor for JCC LED battens
- Mounted via 20mm conduit entry points
- 360° field of detection, up to 10m max.
- IP65 rated protection against dust & moisture
- Includes built in daylight sensor with adjustable lux levels and hold time



IP 65 Rating | Class 2 | 5yr Warranty*

CODE	DESCRIPTION
LEV**71940**	Batten Mount PIR - for use with ToughLED Pro, Skypack Pro and Skytile Surface

Body: Polycarbonate. **Diffuser:** Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Modular Sensor Packs

For Skypack™ Pro and ToughLED™ Pro

- Simple Plug and play Microwave On/Off sensor for JCC LED Battens
- Step dimming available as complete fitting (see pages 232-243)
- Slimline construction, designed specifically for JCC LED Battens
- Cable lengths predetermined for clean wiring
- Tool-less clip in tray connection with unique hinge and lock mechanism
- Microwave sensor remote control (LEV**71930**) also available



IP 20 Rating | Class 2 | 5yr Warranty* | Sensing options

CODE	DESCRIPTION
LEV**71929**	Microwave On/Off Sensor for use with **JCC LED Battens: Skypack™ Pro and ToughLED™ Pro**

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.


LEVITON

Modular Sensor Pack
Microwave On/Off Remote

- Quick and simple programming of microwave sensor settings
- For use with the JCC LED Batten Modular Sensor Packs

RESET
Press once to reset the sensor back to dip switch settings.

ON/OFF BUTTON
Off mode: Turns the light off.
On mode: Turns the light on, sensor starts to work using the last program setting.



DETECTION AREA
Variable microwave sensitivity depending on mounting height & required area of detection.

HOLD TIME
The time period the luminaire remains at 100% illumination after no motion is detected.

DISABLE MODE
Turns off the sensor, light becomes a standard fitting. To reset, press ON/OFF button or switch on/off using wall switch.

DAYLIGHT SENSOR
Set up daylight threshold: 5 lux/15 lux/50 lux/disable.

CODE	DESCRIPTION
LEV**71930**	Microwave On/Off Sensor Remote Control for use with LEV**71929**

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Modular Sensor Pack

Microwave Step Dim Remote

- Quick and simple programming of microwave sensor settings
- For use with the JCC LED Batten Modular Sensor Packs



RESET

Press once to reset the sensor back to dip switch settings.

ON/OFF BUTTON

Off mode: Turns the light off.
On mode: Turns the light on, sensor starts to work using the last program setting.

HOLD TIME

The time period the luminaire remains at 100% illumination after no motion is detected.

DIM LEVEL

The time period the luminaire remains at 100% illumination after no motion is detected.

DETECTION AREA

Variable microwave sensitivity depending on mounting height & required area of detection.

DIM TIME

Standby period.
5 min, 30min or infinity.

DAYLIGHT SENSOR

Set up daylight threshold:
5 lux/15 lux/50 lux/disable.


CODE	DESCRIPTION
LEV**71932**	Microwave Step Dim Remote Control for use with **Microwave Dim JCC LED Battens**

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Toughbay™
Microwave Remote

- Quick and simple programming of microwave sensor settings
- For use with the Toughbay™ Microwave range

Scan QR code for product video

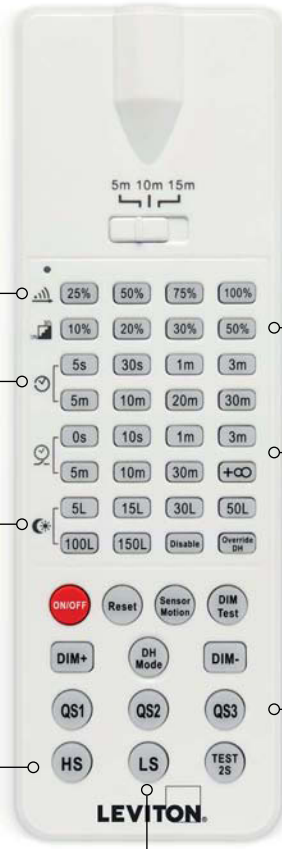

DETECTION AREA
Variable microwave sensitivity depending on mounting height & required area of detection.

HOLD TIME
The length of time the luminaire remains at full brightness before dimming or turning off.

DAYLIGHT SENSOR
Select ambient natural light level that is required before the luminaire is switched on with microwave detection.

HS BUTTON
Increases sensitivity.

LS BUTTON
Decreases sensitivity.

STAND-BY DIM LEVEL
The minimum brightness the luminaire remains at after no movement is detected.

STAND-BY PERIOD
Length of time the luminaire remains at the dimmed brightness before turning off.

QUICK SETTING
4 default settings available. Suitable for different applications & mounting heights (see website for more details).

CODE	DESCRIPTION
LEV**71808**	Toughbay Microwave Remote

Body: Polycarbonate.

Toughbay™ Pro
Dim Sensors IP65

- Plug and play PIR and microwave dim sensors for use with Toughbay™ Pro
- Simple screw on connection
- Max. mounting height 12m
- Remote control available for quick and simple programming (LEV**71808**)

LEV**71950**



LEV**71951**



IP 65 Rating

Class 3

5yr Warranty*

CODE	DESCRIPTION
LEV**71950**	Toughbay Pro PIR Dim Sensor IP65
LEV**71951**	Toughbay Pro Microwave Dim Sensor IP65
LEV**71808**	Remote control for Toughbay Pro MW and PIR sensors

Material: Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.
2 year warranty on batteries for emergency variants. Terms & Conditions apply.

Recessed PIR Sensor

- Maximum mounting height of 6m
- AC cable length 150mm






Ultra low profile design

IP 20 Rating

Class 2

5yr Warranty*

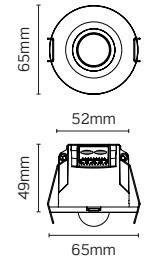

CODE	DESCRIPTION
LEV**71945**	Recessed PIR Sensor On/Off White

Material: Polycarbonate.

*For fast support, register at jcc.co.uk/warranty, or contact warranty@jcc.co.uk with your proof of purchase.



PIR Detector

- Manual override PIR sensor feature
- Compatible with both LED and Halogen
- Available in black and white
- Maximum installation height 2.5m


LEV**68003WH**



IP 44 **Rating**

2yr **Guarantee**

WH **White**



CODE	DESCRIPTION	DETECTION DISTANCE	HOLD TIME	DETECTION RANGE
LEV**68003WH**	IP44 PIR	12m	10 secs to 4 mins	180°

Body: Polycarbonate.


PIR Detector

- Manual override PIR sensor feature
- Compatible with both LED and Halogen
- Available in black and white
- Maximum installation height 2.5m

LEV**68003BLK**



IP 44 **Rating** | 2yr **Guarantee** | BLK **Black**



CODE	DESCRIPTION	DETECTION DISTANCE	HOLD TIME	DETECTION RANGE
LEV**68003BLK**	IP44 PIR	12m	10 secs to 4 mins	180°

Body: Polycarbonate.

Technical

Lighting Terminology 528

Understanding Colour Temperature 530

IP Ratings 532


Bathroom Lighting Zones 534

Emergency Lighting 536

Dimming explained 538

Building Regulations 540

Commercial Lighting Guide 542

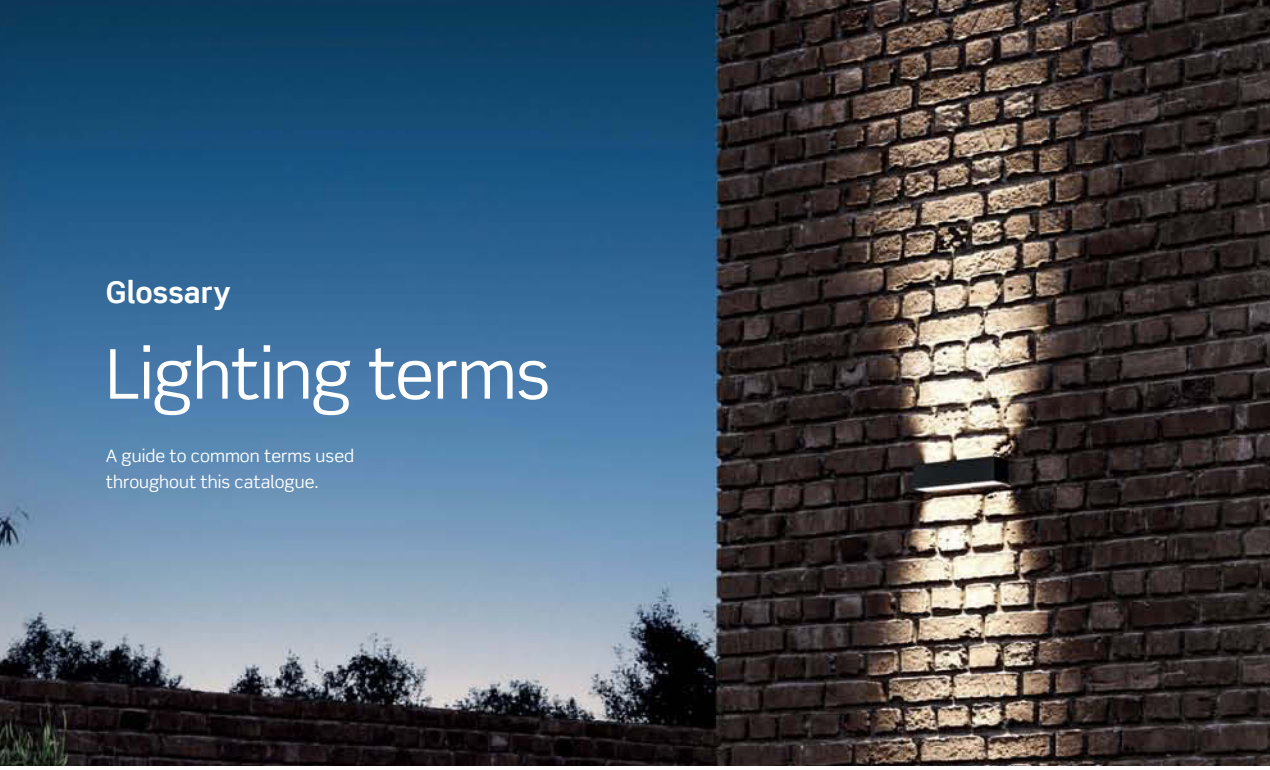

Glossary

Lighting terms

A guide to common terms used throughout this catalogue.

WATTAGE

A measure of power or the rate of energy consumption by an electrical device when it is in operation, calculated by multiplying the voltage at which an appliance operates by the current it draws (Watts = Volts X Amperes).

LUMENS

A lumen is a unit of measurement that is used to express how much illumination a source of light provides.

LUMENS PER CIRCUIT WATT

A calculation of the efficiency of a fitting.
Lumens (3000) ÷ Wattage (30W) = 100 LpcW

LIGHT OUTPUT RATIO

This is a measure of the efficiency of the fitting and is a ratio of the lumens leaving the light source and the lumens that finally leave the fitting.

LUX

A measure of the intensity of light as seen by the human eye and measured by luminous flux per unit area. One lux is equal to one lumen per square metre.

LENI (LIGHT ENERGY NUMERIC INDICATOR)

LENI is a measurement of the buildings energy performance in energy usage per sq/m per year.

LUMEN DEPRECIATION (L70)

Lumen depreciation values reflect the overall performance of a light source through its life. All light sources suffer from lumen depreciation, which can be accelerated by poor thermal conditions, over voltage or incorrect application. L70 is the operating time (hours) until the LED lumen output is depreciated to 70% of its initial lumens.

CRI (COLOUR RENDERING INDEX)

A measure of the ability of a light source to reproduce the colours of various objects. A light source with a CRI of 100 (Ra) would be perfect and balanced in terms of colour reproduction, shading and contrast.

IP RATINGS

Ingress Protection (IP) is a value given to products that have particular protection against dust and/or moisture. The IP number is split, the first digit represents the level of protection against dust particles while the second digit represents the protection against moisture. For example IP00 has no protection against dust or moisture whilst a product with IP68 is dust tight and submersible up to 2m (see p.532 for more information).



ON/OFF

Simply interrupts the electrical supply to the light fitting.

ON/OFF TIMED

Switches the lights on for a pre-programmed time and are often used in communal access corridors and staircases.

DIMMABLE

Switches allow adjustment of the light level, often adjusted by rotary (Triac) or the length of time the switch is pressed (Switch Dim).

NON-DIMMABLE

The driver cannot adjust the power to the LED fitting and can therefore only be switched on/off.

DALI/1-10V DIMMABLE

The power to the LEDs can be changed by the driver when it receives a signal from the operating system. Examples include DALI or 1-10V dimming. These can also be programmed to create 'scenes' and 'zones' within the lighting.

PIR

'Passive Infrared' identifies people or animals by looking for changes in the heat pattern. The sensor detects the change in radiation and turn on the light.

MICROWAVE


A transmitter that sends out continuous high frequency micro waves that bounce off people and are received back at the sensor. These detectors can be more robust than a PIR and have built in step dimming.

PHOTOCELL

The sensor reacts to natural ambient light and will turn on when a predetermined level of light is reached. The fitting remains on until the light increases to a second pre set light level, at which the light will switch off. This is useful when limited illumination is required for safety or security.

WIRELESS TRANSMISSION

Used to transmit a digital signal and doesn't require a separate control wire, however wireless links can suffer interference and are limited in range particularly where walls and metal objects exist. Examples of these include RF (radio frequency) and Zigbee which is an example standard that allows meshing to increase range and availability.

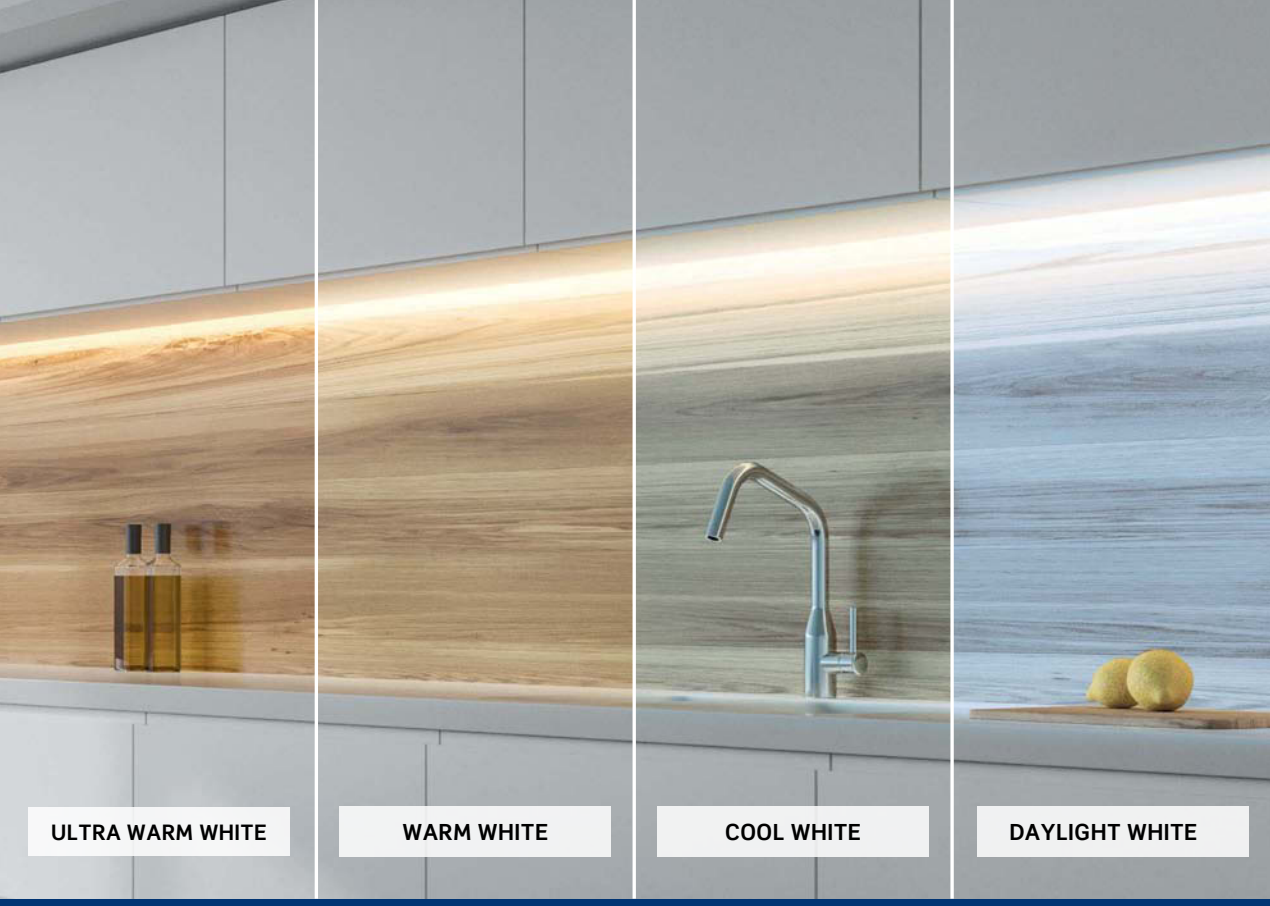

Understanding Colour Temperature

Kelvin temperature scale

The colour temperature of a light source is measured in degrees Kelvin. Below is a Kelvin temperature scale with examples of how colour temperature is used within different lighting applications.

WARM				COOL				DAYLIGHT
1000K	2000K	3000K	4000K	5000K	6000K	7000K	8000K	9000K

ULTRA WARM WHITE (1000K - 2700K)

Ultra warm white lighting has a warm orange appearance, strongly intensifying red and orange. This is commonly used in residential or hospitality applications.

WARM WHITE (2700K - 3500K)

Warm white lighting has a yellowed appearance, intensifying red, orange and yellow colours. This is commonly used in residential or hospitality applications.

COOL WHITE (4000K - 5000K)

Cool white lighting has a blue appearance, intensifying blues and greens. This is commonly used in office, health and industrial applications.

DAYLIGHT WHITE (6000K+)

Daylight white lighting has a blue appearance, intensifying red, orange and yellow colours. This is commonly used in residential or hospitality applications.



Adding interest to lighting

Good lighting design recognises the need for depth of view. Both ambient and accent lighting should be used, whilst combining colour temperatures to create a more comfortable working environment.

AMBIENT LIGHTING

This is the general lighting within an area and typically contributes 80% of the overall lighting level. Skytile® is a good example of product designed for ambient lighting.

ACCENT LIGHTING

Adds interest and depth to a design and should compliment but not conflict with the ambient lighting. This can include wall washing, the subtle use of colour, up lighting and spotlighting. LED Strip and V50™ are excellent for accent lighting.

MIXING WARM & COOL

Coloured lighting within a design can affect the atmosphere created. Ambient lighting can be a cooler temperature to add a more commercial feel. Supplement with warm white as accent lighting to create a more dynamic environment.

RGBW LIGHTING

RGBW lighting combines red, green, blue and white to create multiple different colour options. White options are available in Warm White (3000K) and Cool White (4000K). RGBW lighting is available with our RGBW LED Strip products, see p.348.

IP Ratings

Understanding Ingress Protection

Ingress Protection (IP) is a two digit value given to products that have particular protection against dust and/or moisture. The first digit identifies the level of protection against solid objects and dust particles, while the second digit identifies the protection against moisture.

IP ratings are relevant wherever moisture may be present, such as bathrooms, utility rooms and exterior locations, so it is important to choose the right IP rating for your location. The higher the numbers are, the greater protection the product has.

IP00

Has no protection against dust

Has no protection against moisture


IP68

Has dust tight protection


Is submersible up to 2m

Protection against foreign objects


0 being the lowest, providing no protection against foreign objects, and **6** being the highest, providing dust tight protection.




0. No protection against foreign objects




1. Protected against solid objects greater than 50mm




2. Protected against solid objects greater than 12mm




3. Protected against solid objects greater than 2.5mm



4. Protected against solid objects greater than 1.0mm



5. Dust protection




6. Dust tight



Protection against water

0 being the lowest, providing no protection against water, and **8** being the highest, providing protection against the effects of submersion.




0. No protection against water




1. Protected against dripping water




2. Protected against dripping water when tilted up to 15°




3. Protected against spraying water




4. Protected against splashing water




5. Protected against water jets



6. Protected against heavy seas



7. Protected against effects of immersion




8. Protected against effects of submersion

Bathroom Lighting Zones

Bathroom zone locations

The correct lighting for bathroom application must not only be illuminating and aesthetically pleasing, but also adhere to IEE Wiring Regulations, BS 7671 18th Edition, section 701. The regulations identify 'zones' within a bathroom that are deemed to be at risk from water ingress and indicate what type of electrical appliance can be installed in each zone.

Areas of the bathroom are split into zones 0, 1 and 2 and the below illustration gives an example of these zone areas. However, it is important to read the description for specific area measurements and particular care should also be taken with wash basins. Guidance for these are also contained within BS 7671.

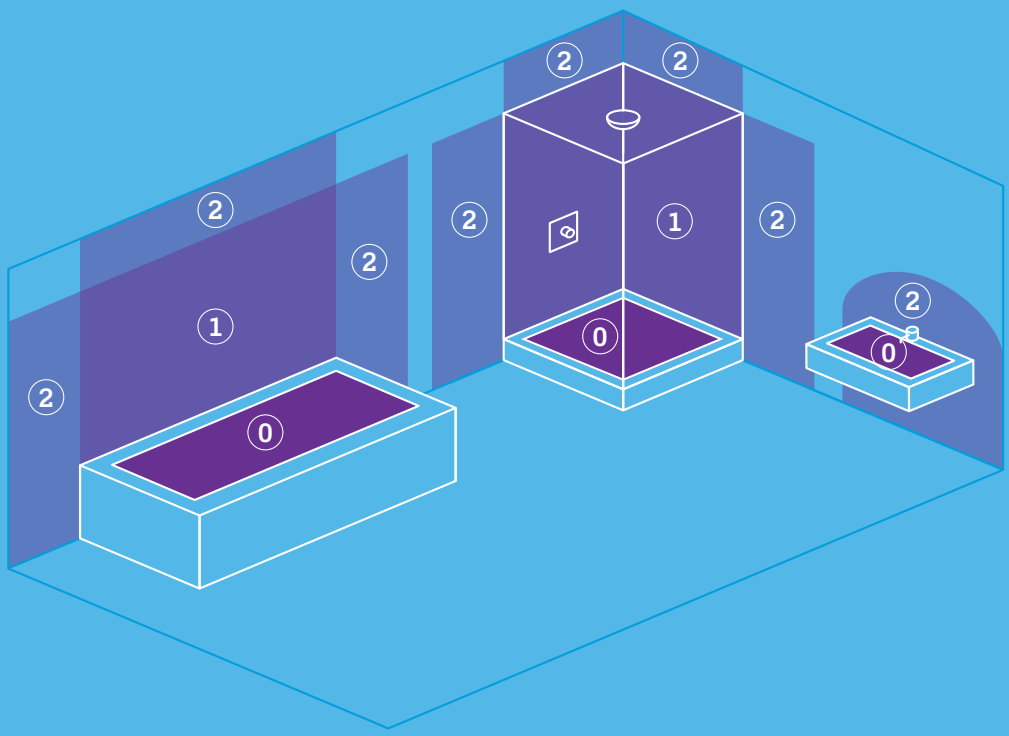

Zone 0

MIN. IPX7

This refers to the interior of the bath or shower that can hold water. Requires electrical products to be low voltage (max. 12V) and rated IPX7, which is immersible up to 1m.

Zone 1

MIN. IPX5

The area above the bath or shower up to a height of 2.25m. Requires a minimum of IPX4, plus RCD protection. IPX5 should be considered if water jets may be present (for cleaning purposes).

Zone 2

MIN. IPX4

Covers an area 0.6 meters wide immediately next to, and all around Zone 1, and to a height of 2.25m. Wash basins should also be treated as Zone 2. The minimum rating here IPX4.





Emergency Lighting

Ready for an emergency

Emergency light fittings include a battery as a backup power source that is continuously charged and can tell when the power has failed, immediately switching to use the backup battery. The battery needs to power the light fitting for a minimum of 3 hours. The light output from the fitting is reduced, often to around 10% of the normal light output.

MAINTAINED FITTING

A maintained fitting will operate as normal and continue to operate should the mains power fail. It acts as a mains light and an emergency light. It can be controlled with all the other lights in the area.

NON-MAINTAINED FITTING

Non-maintained fittings remain switched off and only operates when the mains power supply fails, using its battery supply. Non-maintained fittings are not part of the general lighting but are fittings such as emergency exit signs. All JCC emergency light fittings can operate as a maintained and non-maintained light.

SELF-TEST

Self-Test is an intelligent emergency module that automatically carries out routine functional and duration testing. If a fault is detected, the self-test system will display a visual indication of a fault.

Lighting regulations

OPEN AREAS


The non-obstructed, quickest and safest escape route must be lit to a minimum of 1 lux during an emergency. If the open area is less than 60m² and isn't part of an escape route then emergency lighting isn't required, however the exit doors for the escape route must have signs or an emergency bulkhead light.

ESCAPE ROUTE

An escape route such as a designated corridor must be unobstructed and lit to a minimum of 1 lux during an emergency.

STAIRWELLS & ANY CHANGE IN FLOOR LEVELS

Due to increased hazards, these areas need to be lit to a minimum of 2 lux during an emergency.

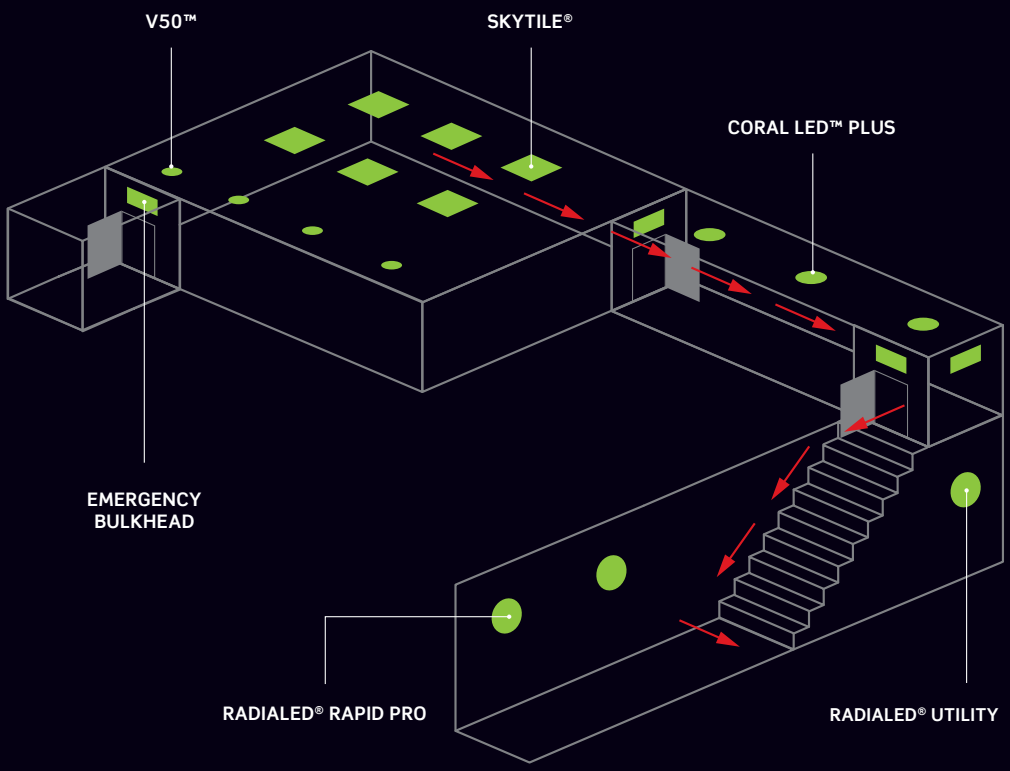

Dimming explained

Dimming lights is a key aspect of modern lighting design, offering both functional and aesthetic advantages. By incorporating dimmable lighting, you can create the perfect atmosphere for any setting, from intimate home environments to dynamic commercial spaces.

Dimming lights plays a significant role in energy conservation. By reducing the brightness of lights when full illumination is not necessary, you can lower electricity consumption and extend the lifespan of the luminaire. This not only helps save on energy consumption but also contributes to environmental sustainability.



Common dimming methods

TRIAC DIMMING

Common application: Domestic

Sometimes referred to as phase dimming. Typically used in domestic applications due to its simple wiring and smaller load limit. Triac typically has a range limit of 0-100W for dedicated LED dimmers*.

SWITCH DIMMING

Common application: Commercial

Also referred to as retractive dimmers, or push to make, switch dimmers look like standard on/off switches, but have the ability to dim by holding down the retractive switch to reduce or increase light levels.

1-10V DIMMING

Common application: Commercial

1-10V dimming is ideal for commercial applications due to its ability to accommodate a higher load*. Typically uses rotary and slide dimmers, providing the same user experience as triac dimmers.

DALI DIMMING

(Digital addressable lighting interface)

Common application: Commercial

Suitable for new builds and retrofits with existing DALI systems. Lighting is controlled and monitored through software, with each fitting having its own address.

*Refer to dimmer instructions for specific load limitations.



2022 Building Regulations

Part B

Part B focuses on fire safety requirements, providing suitable protection for people to escape buildings with the time gained by having provisions in place. Fire rated luminaries are one of these provisions which are designed to slow down the spread of fire between floors.

Part C

Part C aims to prevent condensation and drafts from penetrating the ceiling cut out around a luminaire. Part C compliant products prevent air and moisture from passing through the fitting.

Part E

Part E is most commonly required for buildings such as flats, and is aimed to prevent sound from travelling between floors via the ceiling cut out for the luminaire. Products that are Part E compliant are also known as being acoustic rated.


Part L

Part L outlines the minimum light fitting performance requirements for all commercial and domestic properties. There are different requirements for the following:

PROPERTY TYPE	REQUIREMENTS
Domestic internal	Minimum efficacy of 75 lpcW
Domestic external - 75 lpcW or less	Automated controls (PIR, Photocell or Microwave)
Domestic external - 75 lpcW or more	Basic on/off wall switch
Commercial buildings	Minimum efficacy of 95 lpcW for overall lighting scheme
Commercial display	Minimum efficacy of 75 lpcW

Part P

Part P focuses on lighting and electrical fittings being installed safely, and the appropriate testing and certification of a property.

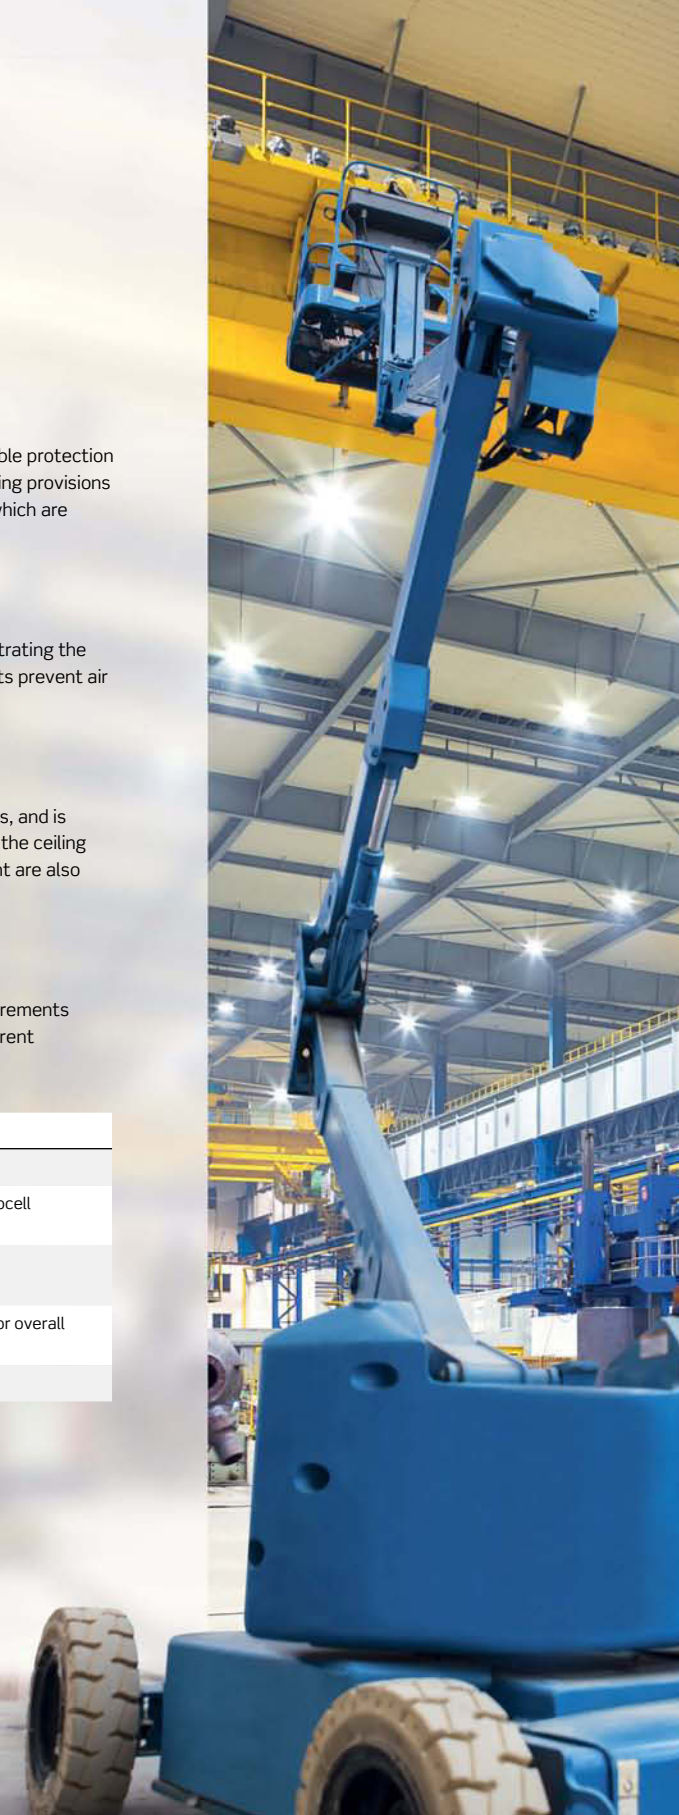





Recommended practices

Commercial Lighting Guide

1. MEETING & BOARDROOM

The main lighting should be focused on the table areas. Remember to allow control of lighting near screens and displays. Use accent lighting to provide depth, and consider lighting pictures and other features.

2. OFFICE AREA

Try to allow for flexible use of the space so that desks can be repositioned. The lighting on desks should be greater than general movement areas. Consider the opportunity to use natural daylight, this may require lighting control for daylight harvesting. Adequately light emergency escape routes (see p.536).

3. RECEPTION

The reception area can provide a first impression of the business. The ambient and accent lighting should be varied to provide a dynamic feel.

4. STAIRWELLS

Primarily focus on safety by ensuring good light levels. Also consider the emergency requirements for emergency escape.

5. BASEMENT

Natural light and external views are unavailable and therefore it's vital to create depth of design by mixing accent and ambient light with variations in colour temperature.

6. SHOWROOM/RETAIL

The primary focus should be on the products being displayed. Track lighting can provide flexibility for changes of use (see StarSpot pages 308-334). Good CRI (see p.528) is important to ensure that colours are displayed correctly, LED lighting can have good and consistent CRI. Also consider the reliability of the lighting, a long L70 (see p.528) is important or the products will become dimly lit over time as product performance deteriorates.

7. EXTERIOR

Consider the security requirements and the safe passage of people when entering and leaving the building. Good exterior lighting can dramatically change the look of a building so consider both lighting the area around the building and the elevations of the entrance area and side walls.



Spares & Replacements

Spares & Replacements

In the event a replacement component is required, use the below codes to order direct from JCC. Additional spares may be available, please contact us to discuss any requirements you may have.

CUSTOMER SERVICES: +44 (0)1243 838999 | customer.services@jcc.co.uk

TECHNICAL SUPPORT: technical.support@jcc.co.uk

V50™

CODE	DESCRIPTION
BC**00343**	V50™ Replacement Driver
BC**00344**	V50™ Tilt Replacement Driver

Skytile®

CODE	DESCRIPTION
BC**00346**	Skytile® Base 16W Non-dim 8 Way Loop In/Loop Out driver only for 600x600
BC**00347**	Skytile® Base 30W Non-dim 8 Way Loop In/Loop Out driver only for 600x600/1200x300
BC**00348**	Skytile® Base 38W Non-dim 8 Way Loop In/Loop Out driver only for 600x600
BC**00349**	Skytile® Base 40W Non-dim 8 Way Loop In/Loop Out driver only for 1200x600
SPR**0626**	Skytile® 600x600 Bracket (2 off) for Armstrong Oracle T-Clip 5mm System
SPR**020010**	Skytile® Base TP(a) UGR 28W IP20 Non-dimmable Driver
SPR**0673**	IP65 foam washer for use with Skytile® IP65 JC080053/JCEM002
SPR**020002**	Spare Driver for Skytile® Direct/Indirect JC71376
LEV**71953**	Skytile® 30W Triac Dimmable Driver IP20 500mA-900mA 28V-48VDC
SPR**020004**	Spare Driver for JC080029/30
SPR**020005**	Spare Driver for JC080002/03/13/14
SPR**020006**	Spare Driver for JC080021/22

Coral LED™

CODE	DESCRIPTION
SPR**020007**	Coral LED™ Plus Commercial Downlight 13W Non-dim driver IP20 Loop In/Loop Out
SPR**020008**	Coral LED™ Plus Commercial Downlight 18W/25W Non-dim driver IP20 Loop In/Loop Out

Skypack™ Pro

CODE	DESCRIPTION
LEV**71952/1-10V**	Skypack™ Pro 4ft 34W 1-10V driver IP20
LEV**71952/DALI**	Skypack™ Pro 4ft 34W DALI driver IP20
SPR**0674**	Skypack™ Pro terminal block plastic holder

ToughLED™ Pro

CODE	DESCRIPTION
LEV**71920**	ToughLED™ Pro LED Driver 18W 4ft Single IP20 Standard
LEV**71921**	ToughLED™ Pro LED Driver 38W 4ft Twin IP20 Standard
LEV**71922**	ToughLED™ Pro LED Driver 29W 5ft Single IP20 Standard
LEV**71923**	ToughLED™ Pro LED Driver 57W 5ft Twin IP20 Standard
LEV**71924**	ToughLED™ Pro LED Driver 39W 6ft Single IP20 Standard
LEV**71925**	ToughLED™ Pro LED Driver 72W 6ft Twin IP20 Standard
LEV**71927/1-10V**	ToughLED™ Pro 38W IP20 1-10V Driver
LEV**71927DALI**	ToughLED™ Pro 38W IP20 DALI Driver
LEV**71928/1-10V**	ToughLED™ Pro 72W IP20 1-10V Driver
LEV**71928DALI**	ToughLED™ Pro 72W IP20 DALI Driver
LEV**71929**	ToughLED™ Pro Microwave Sensor On/Off IP20
LEV**71930**	ToughLED™ Pro Microwave Sensor On/Off Remote Control IP20 (LEV71929)
LEV**71931**	ToughLED™ Pro Microwave Sensor Step-dimmable IP20
LEV**71932**	ToughLED™ Pro Microwave Sensor Step-dimmable Remote Control IP20 (LEV71931)
SPR**050013**	ToughLED™ Pro Installation accessory kit
SPR**050012**	ToughLED™ Pro Stainless steel Diffuser clips (pack of 2)
SPR**180001**	ToughLED™ Pro 1200mm 4ft Base only including diffuser clips
SPR**180033**	ToughLED™ Pro 1500mm 5ft Base only including diffuser clips
SPR**180065**	ToughLED™ Pro 1800mm 6ft Base only including diffuser clips

RadiaLED® Rapid

CODE	DESCRIPTION
LEV**71960**	RadiaLED® Rapid Pro MW on/off Sensor
LEV**71961**	RadiaLED® Rapid Pro MW Dim Sensor/driver (12W/16W/20w)
LEV**71962**	RadiaLED® Rapid Pro MW Dim Sensor/driver (8/12w)
SPR**050014**	RadiaLED® Rapid diffuser large 12W/16W/24W
SPR**050015**	RadiaLED® Rapid diffuser Small 8W
SPR**0565**	RadiaLED® Utility - JC23201WOP - Spare Small Opal Diffuser
SPR**0566**	RadiaLED® Utility - JC23201WPR - Spare Small Prismatic Diffuser
SPR**0567**	RadiaLED® Utility - JC23202/3WOP - Spare Large Opal Diffuser
SPR**0567**	RadiaLED® Utility - JC23202/3WPR - Spare Large Prismatic Diffuser

Index

BC**00343**- JC**050006** 550-551

JC**050007** - JC**070304** 552-553

JC**070305** - JC**080103** 554-555

JC**080104** - JC**100203** 556-557

JC**100204** - JC**121429** 558-559

JC**121430** - JC**180077** 560-561

JC**180078** - JC**73041** 562-563

JC**73042** - LEV**71980** 564-565

Codes BC**00343** - JC**039001**

Code	Section	Page
BC**00343**	Fire-rated Downlights	30
BC**00344**	Fire-rated Downlights	31
BC**020001**	LED Strip	357
BC**020007**	LED Strip	357
BC**020009**	LED Strip	357
BC**020010**	LED Strip	357
BC**020011**	LED Strip	357
BC**020012**	LED Strip	357
BC**020013**	LED Strip	357
JC**010010**	Fire-rated Downlights	56
JC**010013**	Fire-rated Downlights	56
JC**010016**	Fire-rated Downlights	57
JC**010019**	Fire-rated Downlights	57
JC**010023**	Fire-rated Downlights	58
JC**010026**	Fire-rated Downlights	58
JC**010027**	Fire-rated Downlights	62
JC**010028**	Fire-rated Downlights	62
JC**010029**	Fire-rated Downlights	66
JC**010030**	Fire-rated Downlights	66
JC**010031**	Fire-rated Downlights	63
JC**010032**	Fire-rated Downlights	63
JC**010033**	Fire-rated Downlights	67
JC**010034**	Fire-rated Downlights	67
JC**010036**	Fire-rated Downlights	72
JC**014230**	Spotlights & Track Systems	326
JC**014231**	Spotlights & Track Systems	327
JC**014232**	Spotlights & Track Systems	310
JC**014233**	Spotlights & Track Systems	311
JC**014234**	Spotlights & Track Systems	310
JC**014235**	Spotlights & Track Systems	311
JC**014236**	Spotlights & Track Systems	312
JC**014237**	Spotlights & Track Systems	313
JC**014238**	Spotlights & Track Systems	312
JC**014239**	Spotlights & Track Systems	313
JC**014240**	Spotlights & Track Systems	314
JC**014241**	Spotlights & Track Systems	315
JC**014242**	Spotlights & Track Systems	314
JC**014243**	Spotlights & Track Systems	315
JC**014244**	Spotlights & Track Systems	316
JC**014245**	Spotlights & Track Systems	317
JC**014246**	Spotlights & Track Systems	316
JC**014247**	Spotlights & Track Systems	317
JC**014248**	Spotlights & Track Systems	316
JC**014249**	Spotlights & Track Systems	317
JC**014250**	Spotlights & Track Systems	316
JC**014251**	Spotlights & Track Systems	317
JC**030031**	Commercial & Office	184
JC**030032**	Commercial & Office	184
JC**030033**	Commercial & Office	184
JC**030034**	Commercial & Office	184
JC**030037**	Commercial & Office	184
JC**030038**	Commercial & Office	184
JC**030041**	Commercial & Office	186
JC**030042**	Commercial & Office	186
JC**030043**	Commercial & Office	186
JC**030044**	Commercial & Office	186
JC**030047**	Commercial & Office	186
JC**030048**	Commercial & Office	186
JC**030051**	Commercial & Office	185
JC**030052**	Commercial & Office	185
JC**030053**	Commercial & Office	185
JC**030054**	Commercial & Office	185
JC**030057**	Commercial & Office	185
JC**030058**	Commercial & Office	185
JC**030061**	Commercial & Office	187
JC**030062**	Commercial & Office	187
JC**030063**	Commercial & Office	187
JC**030064**	Commercial & Office	187
JC**030067**	Commercial & Office	187
JC**030068**	Commercial & Office	187
JC**030071**	Commercial & Office	187
JC**030072**	Commercial & Office	184
JC**030073**	Commercial & Office	184
JC**030074**	Commercial & Office	186
JC**030075**	Commercial & Office	186
JC**039001**	Bollards	488

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Code	Section	Page
JC**039002**	Bollards	488
JC**039003**	Bollards	488
JC**039005**	Bollards	489
JC**039006**	Bollards	489
JC**039007**	Bollards	489
JC**039009**	Bollards	490
JC**039010**	Bollards	490
JC**039011**	Bollards	490
JC**039013**	Bollards	491
JC**039014**	Bollards	491
JC**039015**	Bollards	491
JC**039017**	Bollards	492
JC**039018**	Bollards	492
JC**039019**	Bollards	492
JC**039021**	Bollards	493
JC**039022**	Bollards	493
JC**039023**	Bollards	493
JC**039025**	Bollards	488
JC**039030**	Exterior wall & garden	400
JC**039031**	Exterior wall & garden	402
JC**039032**	Exterior wall & garden	403
JC**039033**	Exterior wall & garden	400
JC**039034**	Exterior wall & garden	402
JC**039035**	Exterior wall & garden	403
JC**040200**	Industrial	260
JC**040201**	Industrial	260
JC**040202**	Industrial	260
JC**040203**	Industrial	260
JC**040204**	Industrial	260
JC**040205**	Industrial	260
JC**040206**	Industrial	261
JC**040207**	Industrial	261
JC**040208**	Industrial	261
JC**040209**	Industrial	261
JC**040210**	Industrial	261
JC**040211**	Industrial	261
JC**040212**	Industrial	262
JC**040213**	Industrial	262
JC**040214**	Industrial	262
JC**040215**	Industrial	262
JC**040216**	Industrial	262
JC**040217**	Industrial	262
JC**040218**	Industrial	263
JC**040219**	Industrial	263
JC**040220**	Industrial	263
JC**040221**	Industrial	263
JC**040222**	Industrial	263
JC**040223**	Industrial	263
JC**040224**	Industrial	260
JC**040225**	Industrial	260
JC**040226**	Industrial	267
JC**040310**	Industrial	265
JC**040311**	Industrial	265
JC**040312**	Industrial	265
JC**040313**	Industrial	265
JC**040314**	Industrial	265
JC**040315**	Industrial	265
JC**040400**	Industrial	264
JC**040401**	Industrial	264
JC**040402**	Industrial	264
JC**040403**	Industrial	264
JC**040404**	Industrial	264
JC**040405**	Industrial	264
JC**040406**	Industrial	264
JC**040407**	Industrial	264
JC**040408**	Industrial	264
JC**040409**	Industrial	264
JC**040410**	Industrial	264
JC**040411**	Industrial	264
JC**040502**	Industrial	268
JC**050001**	Floodlights	480
JC**050002**	Floodlights	481
JC**050003**	Floodlights	482
JC**050004**	Floodlights	483
JC**050005**	Floodlights	474
JC**050006**	Floodlights	475

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Codes JC**050007** - JC**050159**

Code	Section	Page	Code	Section	Page
JC**050007**	Floodlights	476	JC**050122**	Industrial	282
JC**050008**	Floodlights	477	JC**050123**	Industrial	282
JC**050010**	Floodlights	458	JC**050124**	Industrial	283
JC**050011**	Floodlights	459	JC**050125**	Industrial	283
JC**050012**	Floodlights	460	JC**050126**	Industrial	283
JC**050013**	Floodlights	461	JC**050127**	Industrial	283
JC**050014**	Floodlights	462	JC**050128**	Industrial	283
JC**050015**	Floodlights	463	JC**050129**	Industrial	283
JC**050016**	Floodlights	464	JC**050130**	Industrial	283
JC**050017**	Floodlights	465	JC**050131**	Industrial	283
JC**050021**	Floodlights	468	JC**050132**	Industrial	283
JC**050022**	Floodlights	469	JC**050133**	Industrial	283
JC**050023**	Floodlights	470	JC**050134**	Industrial	283
JC**050040**	Floodlights	471	JC**050135**	Industrial	283
JC**050041**	Floodlights	471	JC**050136**	Industrial	281
JC**050042**	Floodlights	471	JC**050137**	Industrial	281
JC**050100**	Industrial	281	JC**050138**	Industrial	281
JC**050101**	Industrial	281	JC**050139**	Industrial	281
JC**050102**	Industrial	281	JC**050140**	Industrial	281
JC**050103**	Industrial	281	JC**050141**	Industrial	281
JC**050104**	Industrial	281	JC**050142**	Industrial	281
JC**050105**	Industrial	281	JC**050143**	Industrial	281
JC**050106**	Industrial	281	JC**050144**	Industrial	281
JC**050107**	Industrial	281	JC**050145**	Industrial	281
JC**050108**	Industrial	281	JC**050146**	Industrial	281
JC**050109**	Industrial	281	JC**050147**	Industrial	281
JC**050110**	Industrial	281	JC**050148**	Industrial	282
JC**050111**	Industrial	281	JC**050149**	Industrial	282
JC**050112**	Industrial	282	JC**050150**	Industrial	282
JC**050113**	Industrial	282	JC**050151**	Industrial	282
JC**050114**	Industrial	282	JC**050152**	Industrial	282
JC**050115**	Industrial	282	JC**050153**	Industrial	282
JC**050116**	Industrial	282	JC**050154**	Industrial	282
JC**050117**	Industrial	282	JC**050155**	Industrial	282
JC**050118**	Industrial	282	JC**050156**	Industrial	282
JC**050119**	Industrial	282	JC**050157**	Industrial	282
JC**050120**	Industrial	282	JC**050158**	Industrial	282
JC**050121**	Industrial	282	JC**050159**	Industrial	282

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Code	Section	Page	Code	Section	Page
JC**050160**	Industrial	283	JC**070196**	Bulkheads	374
JC**050161**	Industrial	283	JC**070197**	Bulkheads	374
JC**050162**	Industrial	283	JC**070198**	Bulkheads	374
JC**050163**	Industrial	283	JC**070201**	Bulkheads	374
JC**050164**	Industrial	283	JC**070202**	Bulkheads	374
JC**050165**	Industrial	283	JC**070250**	Bulkheads	380
JC**050166**	Industrial	283	JC**070251**	Bulkheads	380
JC**050167**	Industrial	283	JC**070252**	Bulkheads	380
JC**050168**	Industrial	283	JC**070253**	Bulkheads	380
JC**050169**	Industrial	283	JC**070254**	Bulkheads	380
JC**050170**	Industrial	283	JC**070255**	Bulkheads	380
JC**050171**	Industrial	283	JC**070258**	Bulkheads	381
JC**050200**	Industrial	281	JC**070259**	Bulkheads	381
JC**060100**	Industrial	278	JC**070260**	Bulkheads	381
JC**060101**	Industrial	278	JC**070261**	Bulkheads	381
JC**060102**	Industrial	279	JC**070262**	Bulkheads	381
JC**060103**	Industrial	279	JC**070263**	Bulkheads	381
JC**070083**	Bulkheads	384	JC**070266**	Bulkheads	382
JC**070084**	Bulkheads	384	JC**070267**	Bulkheads	382
JC**070093**	Bulkheads	385	JC**070268**	Bulkheads	382
JC**070094**	Bulkheads	385	JC**070269**	Bulkheads	382
JC**070095**	Bulkheads	386	JC**070270**	Bulkheads	382
JC**070096**	Bulkheads	386	JC**070271**	Bulkheads	382
JC**070097**	Bulkheads	386	JC**070274**	Bulkheads	383
JC**070098**	Bulkheads	386	JC**070275**	Bulkheads	383
JC**070099**	Bulkheads	386	JC**070276**	Bulkheads	383
JC**070100**	Bulkheads	386	JC**070277**	Bulkheads	383
JC**070101**	Bulkheads	386	JC**070278**	Bulkheads	383
JC**070102**	Bulkheads	386	JC**070279**	Bulkheads	383
JC**070103**	Bulkheads	386	JC**070286**	Bulkheads	383
JC**070104**	Bulkheads	386	JC**070287**	Bulkheads	383
JC**070187**	Bulkheads	374	JC**070288**	Bulkheads	383
JC**070188**	Bulkheads	374	JC**070289**	Bulkheads	383
JC**070189**	Bulkheads	374	JC**070300**	Bulkheads	370
JC**070190**	Bulkheads	374	JC**070301**	Bulkheads	370
JC**070193**	Bulkheads	374	JC**070302**	Bulkheads	370
JC**070194**	Bulkheads	374	JC**070303**	Bulkheads	370
JC**070195**	Bulkheads	374	JC**070304**	Bulkheads	370

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Codes JC**070305** - JC**077067**

Code	Section	Page
JC**070305**	Bulkheads	370
JC**070306**	Bulkheads	370
JC**070307**	Bulkheads	370
JC**070310**	Bulkheads	371
JC**070311**	Bulkheads	371
JC**070312**	Bulkheads	371
JC**070313**	Bulkheads	371
JC**070314**	Bulkheads	371
JC**070315**	Bulkheads	371
JC**070316**	Bulkheads	371
JC**070317**	Bulkheads	371
JC**070320**	Bulkheads	372
JC**070321**	Bulkheads	372
JC**070322**	Bulkheads	372
JC**070323**	Bulkheads	372
JC**070324**	Bulkheads	372
JC**070325**	Bulkheads	372
JC**070326**	Bulkheads	372
JC**070327**	Bulkheads	372
JC**070330**	Bulkheads	373
JC**070331**	Bulkheads	373
JC**070332**	Bulkheads	373
JC**070333**	Bulkheads	373
JC**070334**	Bulkheads	373
JC**070335**	Bulkheads	373
JC**070336**	Bulkheads	373
JC**070337**	Bulkheads	373
JC**070340**	Bulkheads	376
JC**070341**	Bulkheads	376
JC**070342**	Bulkheads	376
JC**070343**	Bulkheads	376
JC**070344**	Bulkheads	376
JC**070345**	Bulkheads	376
JC**070346**	Bulkheads	376
JC**070347**	Bulkheads	376
JC**070350**	Bulkheads	377
JC**070351**	Bulkheads	377
JC**070352**	Bulkheads	377
JC**070353**	Bulkheads	377
JC**070354**	Bulkheads	377
JC**070355**	Bulkheads	377
JC**070356**	Bulkheads	377
JC**070357**	Bulkheads	377
JC**070380**	Bulkheads	374
JC**070381**	Bulkheads	374
JC**077001**	Commercial & Office	166
JC**077002**	Commercial & Office	166
JC**077003**	Commercial & Office	166
JC**077004**	Commercial & Office	166
JC**077005**	Commercial & Office	166
JC**077006**	Commercial & Office	166
JC**077008**	Commercial & Office	166
JC**077009**	Commercial & Office	166
JC**077020**	Commercial & Office	170
JC**077021**	Commercial & Office	170
JC**077022**	Commercial & Office	170
JC**077023**	Commercial & Office	170
JC**077024**	Commercial & Office	170
JC**077025**	Commercial & Office	170
JC**077026**	Commercial & Office	170
JC**077027**	Commercial & Office	170
JC**077040**	Commercial & Office	167
JC**077041**	Commercial & Office	167
JC**077042**	Commercial & Office	167
JC**077043**	Commercial & Office	167
JC**077044**	Commercial & Office	167
JC**077045**	Commercial & Office	167
JC**077046**	Commercial & Office	167
JC**077048**	Commercial & Office	167
JC**077060**	Commercial & Office	171
JC**077061**	Commercial & Office	171
JC**077062**	Commercial & Office	171
JC**077063**	Commercial & Office	171
JC**077065**	Commercial & Office	171
JC**077066**	Commercial & Office	171
JC**077067**	Commercial & Office	171

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Code	Section	Page	Code	Section	Page
JC**077068**	Commercial & Office	171	JC**077201**	Commercial & Office	178
JC**077080**	Commercial & Office	168	JC**077202**	Commercial & Office	178
JC**077081**	Commercial & Office	168	JC**077203**	Commercial & Office	178
JC**077082**	Commercial & Office	168	JC**077205**	Commercial & Office	178
JC**077083**	Commercial & Office	168	JC**077206**	Commercial & Office	178
JC**077084**	Commercial & Office	168	JC**077207**	Commercial & Office	178
JC**077085**	Commercial & Office	168	JC**077208**	Commercial & Office	178
JC**077086**	Commercial & Office	168	JC**077210**	Commercial & Office	179
JC**077087**	Commercial & Office	168	JC**077211**	Commercial & Office	179
JC**077088**	Commercial & Office	172	JC**077212**	Commercial & Office	179
JC**077089**	Commercial & Office	172	JC**077213**	Commercial & Office	179
JC**077090**	Commercial & Office	172	JC**077215**	Commercial & Office	179
JC**077091**	Commercial & Office	172	JC**077216**	Commercial & Office	179
JC**077092**	Commercial & Office	172	JC**077217**	Commercial & Office	179
JC**077093**	Commercial & Office	172	JC**077218**	Commercial & Office	179
JC**077094**	Commercial & Office	172	JC**077220**	Commercial & Office	180
JC**077095**	Commercial & Office	172	JC**077221**	Commercial & Office	180
JC**077110**	Commercial & Office	169	JC**077222**	Commercial & Office	180
JC**077111**	Commercial & Office	169	JC**077223**	Commercial & Office	180
JC**077112**	Commercial & Office	169	JC**077225**	Commercial & Office	180
JC**077113**	Commercial & Office	169	JC**077226**	Commercial & Office	180
JC**077114**	Commercial & Office	169	JC**077227**	Commercial & Office	180
JC**077115**	Commercial & Office	169	JC**077228**	Commercial & Office	180
JC**077116**	Commercial & Office	169	JC**077230**	Commercial & Office	181
JC**077117**	Commercial & Office	169	JC**077231**	Commercial & Office	181
JC**077118**	Commercial & Office	173	JC**077232**	Commercial & Office	181
JC**077119**	Commercial & Office	173	JC**077233**	Commercial & Office	181
JC**077120**	Commercial & Office	173	JC**077235**	Commercial & Office	181
JC**077121**	Commercial & Office	173	JC**077236**	Commercial & Office	181
JC**077122**	Commercial & Office	173	JC**077237**	Commercial & Office	181
JC**077123**	Commercial & Office	173	JC**077238**	Commercial & Office	181
JC**077124**	Commercial & Office	173	JC**080050**	LED Panels	153
JC**077125**	Commercial & Office	173	JC**080053**	LED Panels	147
JC**077150**	Commercial & Office	174	JC**080066**	LED Panels	153
JC**077151**	Commercial & Office	174	JC**080100**	LED Panels	142
JC**077153**	Commercial & Office	175	JC**080101**	LED Panels	142
JC**077154**	Commercial & Office	175	JC**080102**	LED Panels	142
JC**077200**	Commercial & Office	178	JC**080103**	LED Panels	142

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Codes JC**080104** - JC**088124**

Code	Section	Page
JC**080104**	LED Panels	142
JC**080105**	LED Panels	142
JC**080106**	LED Panels	142
JC**080107**	LED Panels	142
JC**080108**	LED Panels	142
JC**080109**	LED Panels	142
JC**080110**	LED Panels	142
JC**080111**	LED Panels	142
JC**080116**	LED Panels	144
JC**080117**	LED Panels	144
JC**080118**	LED Panels	144
JC**080119**	LED Panels	144
JC**080120**	LED Panels	144
JC**080121**	LED Panels	144
JC**080122**	LED Panels	144
JC**080123**	LED Panels	144
JC**080128**	LED Panels	145
JC**080129**	LED Panels	145
JC**080130**	LED Panels	145
JC**080131**	LED Panels	145
JC**080132**	LED Panels	145
JC**080133**	LED Panels	145
JC**080134**	LED Panels	145
JC**080135**	LED Panels	145
JC**080200**	LED Panels	136
JC**080201**	LED Panels	136
JC**080202**	LED Panels	136
JC**080203**	LED Panels	134
JC**080204**	LED Panels	134
JC**080205**	LED Panels	134
JC**080206**	LED Panels	137
JC**080207**	LED Panels	137
JC**080208**	LED Panels	137
JC**080209**	LED Panels	138
JC**080210**	LED Panels	138
JC**080211**	LED Panels	138
JC**080212**	LED Panels	139
JC**080213**	LED Panels	139
JC**080214**	LED Panels	139
JC**080215**	LED Panels	136
JC**080216**	LED Panels	136
JC**080217**	LED Panels	136
JC**080218**	LED Panels	134
JC**080219**	LED Panels	134
JC**080220**	LED Panels	134
JC**080221**	LED Panels	137
JC**080222**	LED Panels	137
JC**080223**	LED Panels	137
JC**080224**	LED Panels	138
JC**080225**	LED Panels	138
JC**080226**	LED Panels	138
JC**080227**	LED Panels	139
JC**080228**	LED Panels	139
JC**080229**	LED Panels	139
JC**080230**	LED Panels	136
JC**080231**	LED Panels	134
JC**080233**	LED Panels	138
JC**080234**	LED Panels	139
JC**080235**	LED Panels	136
JC**080236**	LED Panels	134
JC**080238**	LED Panels	138
JC**080239**	LED Panels	139
JC**080250**	LED Panels	148
JC**080251**	LED Panels	148
JC**080254**	LED Panels	149
JC**080255**	LED Panels	149
JC**080258**	LED Panels	150
JC**080259**	LED Panels	150
JC**080262**	LED Panels	151
JC**080263**	LED Panels	151
JC**080264**	LED Panels	151
JC**088120**	Spotlights & Track Systems	328
JC**088121**	Spotlights & Track Systems	329
JC**088122**	Spotlights & Track Systems	318
JC**088123**	Spotlights & Track Systems	319
JC**088124**	Spotlights & Track Systems	318

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Code	Section	Page
JC**088125**	Spotlights & Track Systems	319
JC**088126**	Spotlights & Track Systems	320
JC**088127**	Spotlights & Track Systems	321
JC**088128**	Spotlights & Track Systems	320
JC**088129**	Spotlights & Track Systems	321
JC**088130**	Spotlights & Track Systems	322
JC**088131**	Spotlights & Track Systems	323
JC**088132**	Spotlights & Track Systems	322
JC**088133**	Spotlights & Track Systems	323
JC**088134**	Spotlights & Track Systems	324
JC**088135**	Spotlights & Track Systems	325
JC**088136**	Spotlights & Track Systems	324
JC**088137**	Spotlights & Track Systems	325
JC**088138**	Spotlights & Track Systems	324
JC**088139**	Spotlights & Track Systems	325
JC**088140**	Spotlights & Track Systems	324
JC**088141**	Spotlights & Track Systems	325
JC**091001**	Floodlights	446
JC**091002**	Floodlights	447
JC**091003**	Floodlights	448
JC**091004**	Floodlights	449
JC**091005**	Floodlights	450
JC**091006**	Floodlights	451
JC**091007**	Floodlights	452
JC**091008**	Floodlights	453
JC**091009**	Floodlights	446
JC**091010**	Floodlights	447
JC**091011**	Floodlights	448
JC**091012**	Floodlights	449
JC**091013**	Floodlights	450
JC**091014**	Floodlights	451
JC**091015**	Floodlights	452
JC**091016**	Floodlights	453
JC**091019**	Floodlights	448
JC**091020**	Floodlights	449
JC**091021**	Floodlights	450
JC**091022**	Floodlights	451
JC**091023**	Floodlights	452
JC**091024**	Floodlights	453
JC**1001**	Fire-rated Downlights	30
JC**100100**	Battens & Weatherproofs	212
JC**100101**	Battens & Weatherproofs	212
JC**100102**	Battens & Weatherproofs	212
JC**100103**	Battens & Weatherproofs	212
JC**100104**	Battens & Weatherproofs	212
JC**100105**	Battens & Weatherproofs	212
JC**100106**	Battens & Weatherproofs	212
JC**100107**	Battens & Weatherproofs	212
JC**100108**	Battens & Weatherproofs	212
JC**100109**	Battens & Weatherproofs	212
JC**100120**	Battens & Weatherproofs	214
JC**100121**	Battens & Weatherproofs	214
JC**100122**	Battens & Weatherproofs	214
JC**100123**	Battens & Weatherproofs	214
JC**100124**	Battens & Weatherproofs	214
JC**100125**	Battens & Weatherproofs	214
JC**100126**	Battens & Weatherproofs	214
JC**100127**	Battens & Weatherproofs	214
JC**100128**	Battens & Weatherproofs	214
JC**100129**	Battens & Weatherproofs	214
JC**100140**	Battens & Weatherproofs	216
JC**100141**	Battens & Weatherproofs	216
JC**100142**	Battens & Weatherproofs	216
JC**100143**	Battens & Weatherproofs	216
JC**100144**	Battens & Weatherproofs	216
JC**100145**	Battens & Weatherproofs	216
JC**100146**	Battens & Weatherproofs	216
JC**100147**	Battens & Weatherproofs	216
JC**100148**	Battens & Weatherproofs	216
JC**100149**	Battens & Weatherproofs	216
JC**100160**	Battens & Weatherproofs	212
JC**1002**	Fire-rated Downlights	31
JC**100200**	Battens & Weatherproofs	213
JC**100201**	Battens & Weatherproofs	213
JC**100202**	Battens & Weatherproofs	213
JC**100203**	Battens & Weatherproofs	213

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Codes JC**100204** - JC**121313**

Code	Section	Page
JC**100204**	Battens & Weatherproofs	213
JC**100205**	Battens & Weatherproofs	213
JC**100206**	Battens & Weatherproofs	213
JC**100207**	Battens & Weatherproofs	213
JC**100208**	Battens & Weatherproofs	213
JC**100209**	Battens & Weatherproofs	213
JC**100210**	Battens & Weatherproofs	215
JC**100211**	Battens & Weatherproofs	215
JC**100212**	Battens & Weatherproofs	215
JC**100213**	Battens & Weatherproofs	215
JC**100214**	Battens & Weatherproofs	215
JC**100215**	Battens & Weatherproofs	215
JC**100216**	Battens & Weatherproofs	215
JC**100217**	Battens & Weatherproofs	215
JC**100218**	Battens & Weatherproofs	215
JC**100219**	Battens & Weatherproofs	215
JC**100220**	Battens & Weatherproofs	217
JC**100221**	Battens & Weatherproofs	217
JC**100222**	Battens & Weatherproofs	217
JC**100223**	Battens & Weatherproofs	217
JC**100224**	Battens & Weatherproofs	217
JC**100225**	Battens & Weatherproofs	217
JC**100226**	Battens & Weatherproofs	217
JC**100227**	Battens & Weatherproofs	217
JC**100228**	Battens & Weatherproofs	217
JC**100229**	Battens & Weatherproofs	217
JC**1003**	Fire-rated Downlights	32
JC**1004**	Fire-rated Downlights	32
JC**1005**	Fire-rated Downlights	33
JC**1006**	Fire-rated Downlights	30
JC**1013**	Fire-rated Downlights	36
JC**1015**	Fire-rated Downlights	38
JC**1017**	Fire-rated Downlights	40
JC**1019**	Fire-rated Downlights	50
JC**1020**	Fire-rated Downlights	46
JC**1026**	Fire-rated Downlights	31
JC**1033**	Fire-rated Downlights	36
JC**1035**	Fire-rated Downlights	38
JC**1037**	Fire-rated Downlights	40
JC**110006**	Emergency	300
JC**110007**	Emergency	300
JC**1101**	Fire-rated Downlights	26
JC**1102**	Fire-rated Downlights	27
JC**1107**	Fire-rated Downlights	26
JC**121265**	LED Strip	356
JC**121266**	LED Strip	356
JC**121267**	LED Strip	356
JC**121268**	LED Strip	340
JC**121269**	LED Strip	340
JC**121272**	LED Strip	340
JC**121273**	LED Strip	340
JC**121276**	LED Strip	340
JC**121277**	LED Strip	340
JC**121279**	LED Strip	348
JC**121280**	LED Strip	348
JC**121281**	LED Strip	348
JC**121282**	LED Strip	348
JC**121284**	LED Strip	341
JC**121285**	LED Strip	341
JC**121288**	LED Strip	341
JC**121289**	LED Strip	341
JC**121292**	LED Strip	341
JC**121293**	LED Strip	341
JC**121295**	LED Strip	349
JC**121296**	LED Strip	349
JC**121297**	LED Strip	349
JC**121298**	LED Strip	349
JC**121300**	LED Strip	340
JC**121301**	LED Strip	340
JC**121304**	LED Strip	340
JC**121305**	LED Strip	340
JC**121308**	LED Strip	340
JC**121309**	LED Strip	340
JC**121311**	LED Strip	348
JC**121312**	LED Strip	348
JC**121313**	LED Strip	348

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Code	Section	Page
JC**121314**	LED Strip	348
JC**121316**	LED Strip	341
JC**121317**	LED Strip	341
JC**121320**	LED Strip	341
JC**121321**	LED Strip	341
JC**121324**	LED Strip	341
JC**121325**	LED Strip	341
JC**121327**	LED Strip	349
JC**121328**	LED Strip	349
JC**121329**	LED Strip	349
JC**121330**	LED Strip	349
JC**121333**	LED Strip	359
JC**121334**	LED Strip	359
JC**121337**	LED Strip	359
JC**121338**	LED Strip	359
JC**121341**	LED Strip	359
JC**121342**	LED Strip	359
JC**121344**	LED Strip	359
JC**121345**	LED Strip	359
JC**121346**	LED Strip	359
JC**121347**	LED Strip	359
JC**121348**	LED Strip	358
JC**121349**	LED Strip	358
JC**121350**	LED Strip	358
JC**121351**	LED Strip	358
JC**121352**	LED Strip	358
JC**121353**	LED Strip	358
JC**121354**	LED Strip	358
JC**121357**	LED Strip	358
JC**121359**	LED Strip	358
JC**121360**	LED Strip	358
JC**121362**	LED Strip	356
JC**121363**	LED Strip	356
JC**121364**	LED Strip	356
JC**121365**	LED Strip	356
JC**121366**	LED Strip	356
JC**121367**	LED Strip	356
JC**121368**	LED Strip	356
JC**121369**	LED Strip	356
JC**121370**	LED Strip	356
JC**121375**	LED Strip	356
JC**121376**	LED Strip	356
JC**121377**	LED Strip	356
JC**121378**	LED Strip	356
JC**121387**	LED Strip	356
JC**121388**	LED Strip	356
JC**121400**	LED Strip	340
JC**121401**	LED Strip	341
JC**121402**	LED Strip	340
JC**121403**	LED Strip	341
JC**121404**	LED Strip	340
JC**121405**	LED Strip	341
JC**121406**	LED Strip	340
JC**121407**	LED Strip	341
JC**121408**	LED Strip	340
JC**121409**	LED Strip	341
JC**121410**	LED Strip	340
JC**121411**	LED Strip	341
JC**121412**	LED Strip	340
JC**121413**	LED Strip	341
JC**121414**	LED Strip	340
JC**121415**	LED Strip	341
JC**121416**	LED Strip	340
JC**121417**	LED Strip	341
JC**121418**	LED Strip	340
JC**121419**	LED Strip	341
JC**121420**	LED Strip	340
JC**121421**	LED Strip	341
JC**121422**	LED Strip	340
JC**121423**	LED Strip	341
JC**121424**	LED Strip	340
JC**121425**	LED Strip	341
JC**121426**	LED Strip	340
JC**121427**	LED Strip	341
JC**121428**	LED Strip	340
JC**121429**	LED Strip	341

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Codes JC**121430** - JC**17011**

Code	Section	Page
JC**121430**	LED Strip	340
JC**121431**	LED Strip	341
JC**121432**	LED Strip	340
JC**121433**	LED Strip	341
JC**121434**	LED Strip	340
JC**121435**	LED Strip	341
JC**121436**	LED Strip	340
JC**121437**	LED Strip	341
JC**121438**	LED Strip	340
JC**121439**	LED Strip	341
JC**121440**	LED Strip	340
JC**121441**	LED Strip	341
JC**121442**	LED Strip	340
JC**121443**	LED Strip	341
JC**121444**	LED Strip	340
JC**121445**	LED Strip	341
JC**121446**	LED Strip	340
JC**121447**	LED Strip	341
JC**121448**	LED Strip	346
JC**121449**	LED Strip	346
JC**121450**	LED Strip	347
JC**121451**	LED Strip	347
JC**121501**	LED Strip	352
JC**121502**	LED Strip	352
JC**121505**	LED Strip	352
JC**121506**	LED Strip	352
JC**121509**	LED Strip	354
JC**121510**	LED Strip	354
JC**121511**	LED Strip	354
JC**121512**	LED Strip	353
JC**121513**	LED Strip	353
JC**121514**	LED Strip	353
JC**121515**	LED Strip	353
JC**130001**	Industrial	276
JC**130003**	Industrial	276
JC**130004**	Industrial	277
JC**130005**	Industrial	277
JC**130006**	Industrial	277
JC**130010**	Industrial	273
JC**130011**	Industrial	273
JC**130012**	Industrial	274
JC**130013**	Industrial	274
JC**130014**	Industrial	272
JC**130020**	Industrial	275
JC**131001**	Downlights	104
JC**131002**	Downlights	104
JC**131003**	Downlights	104
JC**131003/X50**	Fire-rated Downlights	26
JC**131004**	Downlights	105
JC**131005**	Downlights	105
JC**131006**	Downlights	105
JC**14001**	Spotlights & Track Systems	330
JC**14002**	Spotlights & Track Systems	330
JC**14003**	Spotlights & Track Systems	330
JC**14004**	Spotlights & Track Systems	331
JC**14005**	Spotlights & Track Systems	331
JC**14006**	Spotlights & Track Systems	331
JC**14007**	Spotlights & Track Systems	331
JC**14008**	Spotlights & Track Systems	331
JC**14009**	Spotlights & Track Systems	331
JC**14010**	Spotlights & Track Systems	331
JC**14011**	Spotlights & Track Systems	331
JC**14012**	Spotlights & Track Systems	331
JC**14013**	Spotlights & Track Systems	331
JC**14070**	Spotlights & Track Systems	331
JC**14093**	Spotlights & Track Systems	331
JC**14094**	Spotlights & Track Systems	331
JC**17001**	Exterior wall & garden	419
JC**17002**	Exterior wall & garden	418
JC**17003**	Exterior wall & garden	418
JC**17004**	Exterior wall & garden	418
JC**17005**	Exterior wall & garden	418
JC**17006**	Exterior wall & garden	418
JC**17008**	Exterior wall & garden	431
JC**17010**	Exterior wall & garden	428
JC**17011**	Exterior wall & garden	424

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Code	Section	Page
JC**17015**	Exterior wall & garden	422
JC**17016**	Exterior wall & garden	423
JC**17017**	Exterior wall & garden	425
JC**17028**	Exterior wall & garden	441
JC**17035**	Exterior wall & garden	429
JC**17037**	Exterior wall & garden	432
JC**17043**	Exterior wall & garden	430
JC**17044**	Exterior wall & garden	440
JC**17045**	Exterior wall & garden	440
JC**17049**	Exterior wall & garden	438
JC**17050**	Exterior wall & garden	408
JC**17051**	Exterior wall & garden	409
JC**17052**	Exterior wall & garden	412
JC**17053**	Exterior wall & garden	413
JC**17054**	Exterior wall & garden	414
JC**17055**	Exterior wall & garden	415
JC**17056**	Exterior wall & garden	412
JC**17057**	Exterior wall & garden	413
JC**17058**	Exterior wall & garden	414
JC**17059**	Exterior wall & garden	415
JC**17060**	Exterior wall & garden	404
JC**17061**	Exterior wall & garden	405
JC**17062**	Exterior wall & garden	406
JC**17063**	Exterior wall & garden	407
JC**17064**	Exterior wall & garden	439
JC**17077**	Bollards	494
JC**17078**	Bollards	494
JC**17079**	Bollards	496
JC**17080**	Bollards	495
JC**17081**	Bollards	497
JC**17082**	Bollards	494
JC**180001**	Battens & Weatherproofs	234
JC**180002**	Battens & Weatherproofs	234
JC**180003**	Battens & Weatherproofs	234
JC**180004**	Battens & Weatherproofs	234
JC**180005**	Battens & Weatherproofs	234
JC**180006**	Battens & Weatherproofs	234
JC**180007**	Battens & Weatherproofs	234
JC**180008**	Battens & Weatherproofs	234
JC**180009**	Battens & Weatherproofs	235
JC**180010**	Battens & Weatherproofs	235
JC**180011**	Battens & Weatherproofs	235
JC**180012**	Battens & Weatherproofs	235
JC**180013**	Battens & Weatherproofs	235
JC**180014**	Battens & Weatherproofs	235
JC**180015**	Battens & Weatherproofs	235
JC**180016**	Battens & Weatherproofs	235
JC**180033**	Battens & Weatherproofs	238
JC**180034**	Battens & Weatherproofs	238
JC**180035**	Battens & Weatherproofs	238
JC**180036**	Battens & Weatherproofs	238
JC**180037**	Battens & Weatherproofs	238
JC**180038**	Battens & Weatherproofs	238
JC**180039**	Battens & Weatherproofs	238
JC**180040**	Battens & Weatherproofs	238
JC**180041**	Battens & Weatherproofs	239
JC**180042**	Battens & Weatherproofs	239
JC**180043**	Battens & Weatherproofs	239
JC**180044**	Battens & Weatherproofs	239
JC**180045**	Battens & Weatherproofs	239
JC**180046**	Battens & Weatherproofs	239
JC**180047**	Battens & Weatherproofs	239
JC**180048**	Battens & Weatherproofs	239
JC**180065**	Battens & Weatherproofs	242
JC**180066**	Battens & Weatherproofs	242
JC**180067**	Battens & Weatherproofs	242
JC**180068**	Battens & Weatherproofs	242
JC**180069**	Battens & Weatherproofs	242
JC**180070**	Battens & Weatherproofs	242
JC**180071**	Battens & Weatherproofs	242
JC**180072**	Battens & Weatherproofs	242
JC**180073**	Battens & Weatherproofs	243
JC**180074**	Battens & Weatherproofs	243
JC**180075**	Battens & Weatherproofs	243
JC**180076**	Battens & Weatherproofs	243
JC**180077**	Battens & Weatherproofs	243

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Codes JC**180078** - JC**54300**

Code	Section	Page
JC**180078**	Battens & Weatherproofs	243
JC**180079**	Battens & Weatherproofs	243
JC**180080**	Battens & Weatherproofs	243
JC**180100**	Battens & Weatherproofs	232
JC**180101**	Battens & Weatherproofs	232
JC**180102**	Battens & Weatherproofs	232
JC**180103**	Battens & Weatherproofs	232
JC**180104**	Battens & Weatherproofs	232
JC**180105**	Battens & Weatherproofs	232
JC**180106**	Battens & Weatherproofs	232
JC**180107**	Battens & Weatherproofs	232
JC**180108**	Battens & Weatherproofs	233
JC**180109**	Battens & Weatherproofs	233
JC**180110**	Battens & Weatherproofs	233
JC**180111**	Battens & Weatherproofs	233
JC**180112**	Battens & Weatherproofs	233
JC**180113**	Battens & Weatherproofs	233
JC**180114**	Battens & Weatherproofs	233
JC**180115**	Battens & Weatherproofs	233
JC**180116**	Battens & Weatherproofs	236
JC**180117**	Battens & Weatherproofs	236
JC**180118**	Battens & Weatherproofs	236
JC**180119**	Battens & Weatherproofs	236
JC**180120**	Battens & Weatherproofs	236
JC**180121**	Battens & Weatherproofs	236
JC**180122**	Battens & Weatherproofs	236
JC**180123**	Battens & Weatherproofs	236
JC**180124**	Battens & Weatherproofs	237
JC**180125**	Battens & Weatherproofs	237
JC**180126**	Battens & Weatherproofs	237
JC**180127**	Battens & Weatherproofs	237
JC**180128**	Battens & Weatherproofs	237
JC**180129**	Battens & Weatherproofs	237
JC**180130**	Battens & Weatherproofs	237
JC**180131**	Battens & Weatherproofs	237
JC**180136**	Battens & Weatherproofs	240
JC**180137**	Battens & Weatherproofs	240
JC**180138**	Battens & Weatherproofs	240
JC**180139**	Battens & Weatherproofs	240
JC**180140**	Battens & Weatherproofs	240
JC**180141**	Battens & Weatherproofs	240
JC**180142**	Battens & Weatherproofs	240
JC**180143**	Battens & Weatherproofs	240
JC**180144**	Battens & Weatherproofs	241
JC**180145**	Battens & Weatherproofs	241
JC**180146**	Battens & Weatherproofs	241
JC**180147**	Battens & Weatherproofs	241
JC**180148**	Battens & Weatherproofs	241
JC**180149**	Battens & Weatherproofs	241
JC**180150**	Battens & Weatherproofs	241
JC**180151**	Battens & Weatherproofs	241
JC**23401**	Bulkheads	388
JC**23402**	Bulkheads	390
JC**23411**	Bulkheads	388
JC**23412**	Bulkheads	390
JC**23421**	Bulkheads	389
JC**23422**	Bulkheads	390
JC**23431**	Bulkheads	389
JC**23432**	Bulkheads	390
JC**24240**	Bulkheads	392
JC**24241**	Bulkheads	393
JC**24242**	Bulkheads	394
JC**39201**	Bollards	499
JC**39202**	Bollards	501
JC**39203**	Bollards	503
JC**39211**	Bollards	504
JC**39212**	Bollards	506
JC**39213**	Bollards	502
JC**39222**	Exterior wall & garden	435
JC**39223**	Exterior wall & garden	434
JC**39224**	Bollards	498
JC**40007**	Bulkheads	397
JC**47440**	Downlights	119
JC**47441**	Downlights	120
JC**47442**	Downlights	121
JC**54300**	Downlights	118

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Code	Section	Page
JC**54301**	Downlights	118
JC**54302**	Downlights	118
JC**5500**	Downlights	114
JC**5501**	Downlights	114
JC**5502**	Downlights	114
JC**5503**	Downlights	115
JC**5504**	Downlights	115
JC**5505**	Downlights	115
JC**5506**	Downlights	116
JC**5507**	Downlights	116
JC**5508**	Downlights	116
JC**71262**	LED Panels	152
JC**71295**	LED Panels	152
JC**71299**	LED Panels	152
JC**71311**	LED Panels	153
JC**71312**	LED Panels	153
JC**72001**	Downlights	93
JC**72002**	Downlights	94
JC**72003**	Downlights	95
JC**72004**	Downlights	95
JC**72005**	Downlights	96
JC**72006**	Downlights	97
JC**72007**	Downlights	97
JC**72008**	Downlights	98
JC**72009**	Downlights	99
JC**72010**	Downlights	99
JC**72301**	Commercial & Office	190
JC**72302**	Commercial & Office	192
JC**72303**	Commercial & Office	194
JC**72304**	Commercial & Office	196
JC**72305**	Commercial & Office	190
JC**72306**	Commercial & Office	192
JC**72307**	Commercial & Office	195
JC**72308**	Commercial & Office	190
JC**73000**	Downlights	80
JC**73001**	Downlights	80
JC**73002**	Downlights	80
JC**73003**	Downlights	80
JC**73004**	Downlights	81
JC**73005**	Downlights	81
JC**73006**	Downlights	81
JC**73007**	Downlights	81
JC**73008**	Downlights	80
JC**73009**	Downlights	80
JC**73010**	Downlights	80
JC**73011**	Downlights	80
JC**73012**	Downlights	81
JC**73013**	Downlights	81
JC**73014**	Downlights	81
JC**73015**	Downlights	81
JC**73016**	Downlights	80
JC**73017**	Downlights	80
JC**73018**	Downlights	80
JC**73019**	Downlights	80
JC**73020**	Downlights	81
JC**73021**	Downlights	81
JC**73022**	Downlights	81
JC**73023**	Downlights	81
JC**73024**	Downlights	82
JC**73025**	Downlights	82
JC**73026**	Downlights	82
JC**73027**	Downlights	82
JC**73028**	Downlights	83
JC**73029**	Downlights	83
JC**73030**	Downlights	83
JC**73031**	Downlights	83
JC**73032**	Downlights	82
JC**73033**	Downlights	82
JC**73034**	Downlights	82
JC**73035**	Downlights	82
JC**73036**	Downlights	83
JC**73037**	Downlights	83
JC**73038**	Downlights	83
JC**73039**	Downlights	83
JC**73040**	Downlights	82
JC**73041**	Downlights	82

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Codes JC**73042** - JC**88110**

Code	Section	Page
JC**73042**	Downlights	82
JC**73043**	Downlights	82
JC**73044**	Downlights	83
JC**73045**	Downlights	83
JC**73046**	Downlights	83
JC**73047**	Downlights	83
JC**73048**	Downlights	84
JC**73049**	Downlights	84
JC**73050**	Downlights	84
JC**73051**	Downlights	84
JC**73052**	Downlights	85
JC**73053**	Downlights	85
JC**73054**	Downlights	85
JC**73055**	Downlights	85
JC**73056**	Downlights	84
JC**73057**	Downlights	84
JC**73058**	Downlights	84
JC**73059**	Downlights	84
JC**73060**	Downlights	85
JC**73061**	Downlights	85
JC**73062**	Downlights	85
JC**73063**	Downlights	85
JC**73064**	Downlights	84
JC**73065**	Downlights	84
JC**73066**	Downlights	84
JC**73067**	Downlights	84
JC**73068**	Downlights	85
JC**73069**	Downlights	85
JC**73070**	Downlights	85
JC**73071**	Downlights	85
JC**73301**	Commercial & Office	190
JC**73302**	Commercial & Office	192
JC**73303**	Commercial & Office	194
JC**73304**	Commercial & Office	196
JC**74000**	Downlights	87
JC**74001**	Downlights	87
JC**74002**	Downlights	87
JC**74003**	Downlights	88
JC**74004**	Downlights	88
JC**74005**	Downlights	88
JC**74006**	Downlights	89
JC**74007**	Downlights	89
JC**74008**	Downlights	89
JC**74009**	Downlights	90
JC**74010**	Downlights	90
JC**74011**	Downlights	91
JC**74012**	Downlights	91
JC**83213**	LED Strip	358
JC**83214**	LED Strip	358
JC**83215**	LED Strip	358
JC**83216**	LED Strip	358
JC**83217**	LED Strip	358
JC**83218**	LED Strip	358
JC**83301**	LED Strip	362
JC**83302**	LED Strip	362
JC**83303**	LED Strip	362
JC**83304**	LED Strip	362
JC**83305**	LED Strip	362
JC**83306**	LED Strip	362
JC**83307**	LED Strip	362
JC**83308**	LED Strip	362
JC**83309**	LED Strip	362
JC**83310**	LED Strip	362
JC**83311**	LED Strip	362
JC**84300**	Downlights	126
JC**84318**	Downlights	125
JC**84319**	Downlights	124
JC**84320**	Downlights	122
JC**88103**	Spotlights & Track Systems	332
JC**88104**	Spotlights & Track Systems	334
JC**88105**	Spotlights & Track Systems	334
JC**88106**	Spotlights & Track Systems	334
JC**88107**	Spotlights & Track Systems	334
JC**88108**	Spotlights & Track Systems	334
JC**88109**	Spotlights & Track Systems	334
JC**88110**	Spotlights & Track Systems	334

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.

Code	Section	Page
JC**88112**	Spotlights & Track Systems	334
JC**88114**	Spotlights & Track Systems	334
JC**88115**	Spotlights & Track Systems	334
JC**88116**	Spotlights & Track Systems	334
JC**88117**	Spotlights & Track Systems	334
JC**88118**	Spotlights & Track Systems	334
JC**95301**	Downlights	106
JC**95302**	Downlights	106
JC**95303**	Downlights	107
JC**95304**	Downlights	107
JC**95305**	Downlights	108
JC**95306**	Downlights	108
JC**95401**	Downlights	109
JC**95402**	Downlights	109
JC**95403**	Downlights	110
JC**95404**	Downlights	110
JC**95505**	Downlights	111
JC**95606**	Downlights	111
JC**96406**	Bulkheads	396
JC**EM002**	Emergency	302
JC**EM003**	Battens & Weatherproofs	250
JC**EM005**	Bulkheads	370
JC**EM007**	Commercial & Office	166
JC**EM110010**	Emergency	292
JC**EM110011**	Emergency	293
JC**EM110012**	Emergency	294
JC**EM110015**	Emergency	296
JC**EM110016**	Emergency	295
JC**EM110017**	Emergency	295
JC**EM110018**	Emergency	288
JC**EM110020**	Emergency	289
JC**EM110021**	Emergency	291
JC**EM110022**	Emergency	291
JC**EM110023**	Emergency	297
JC**EM110024**	Emergency	298
JC**EM110025**	Emergency	298
JC**EM110027**	Emergency	299
JC**EM110028**	Emergency	301
LEV**68003**	Controls & Sensors	524
LEV**71808**	Controls & Sensors	520
LEV**71929**	Controls & Sensors	516
LEV**71930**	Battens & Weatherproofs	251
LEV**71932**	Battens & Weatherproofs	251
LEV**71940**	Controls & Sensors	515
LEV**71945**	Controls & Sensors	522
LEV**71950**	Industrial	266
LEV**71951**	Industrial	266
LEV**71960**	Bulkheads	370
LEV**71963**	Bulkheads	370
LEV**71980**	Bollards	488

To find product variants, go to the page of the standard code. For instance, for JC1001/WH, refer to the JC1001 page.


Taylors
Unit No:





Sales Director

Dan Golding

Sales Director (Nationwide)
07803 237307
dan.golding@jcc.co.uk

Regional Sales Managers

Mike Rogers

Regional Sales Manager (North)
07789 866298
mike.rogers@jcc.co.uk

Greg Haley

Regional Sales Manager (South)
07713 641939
greg.haley@jcc.co.uk

Centralised Sales Team

Dana Pittman

Centralised Sales Team Lead (Nationwide)
M: 07989 444905
E: dana.pittman@jcc.co.uk

Claire Harvey

North London, Essex, Midlands and East Anglia
T: 01243 833883
E: claire.harvey@jcc.co.uk

Phoebe Phillips

Southern England and Southern Wales
T: 01243 833881
E: phoebe.phillips@jcc.co.uk

Tracey Mustard

Northern England, Scotland and North Wales
T: 01243 833887
E: tracey.mustard@jcc.co.uk

Area Sales Managers

Sally Palmer-Kelly
07717 894248
sally.palmer-kelly@jcc.co.uk
BA, BS, EX, PL, SN, TA, TQ, TR

Richard Bristowe
07741 667666
richard.bristowe@jcc.co.uk
CH (Chester only), DY (Kidderminster only), CW, LL, ST, SY, TF, WV

Janet St George
07867 455258
janet.stgeorge@jcc.co.uk
AL, HP, LU, OX, RG, SL, GU (Aldershot/Camberley only)

Doug Beveridge
07710 109131
doug.beveridge@jcc.co.uk
BH, DT, PO, SO, SP

Roxanne Mansfield
07880 384420
rocky.mansfield@jcc.co.uk
CB, CM, CO, SS

Tom Jones
07551 158488
tom.jones@jcc.co.uk
DA, E, EN, IG, MK (Excluding Milton Keynes), N, RM, SE, SG, WD

Stevie Murdie
07766 814430
stevie.murdie@jcc.co.uk
Scotland

Chris Ivins
07500 805482
chris.ivins@jcc.co.uk
CF, GL, HR, LD, NP, SA, SN

Ali Simons
07880 194396
ali.simons@jcc.co.uk
BD, DN, HD, HX, LS, S, WF

John Curtis
07710 109141
john.curtis@jcc.co.uk
DE, LE, LN, NG, S (Chesterfield only)

Yazmin Hills
07551 158489
yazmin.hills@jcc.co.uk
CT, ME, TN

Andy Crowther
07917 506880
andy.crowther@jcc.co.uk
B, WS, DY (Excludes Kidderminster)

Michael Veide
07740 065526
michael.veide@jcc.co.uk
CA, DH, DL, HG, HU, LA, NE, SR, TD, TS, YO

Martin Hurley
07790 926650
martin.hurley@jcc.co.uk
BN, BR, CR, GU (Guildford/Woking only), HA, KT, NW, RH, SM, SW, TW, UB, W

Richard Jones
07825 065605
richard.jones@jcc.co.uk
BB, BD, BL, CH, FY, IM, L, LA, M, OL, PR, SK, WA, WN

David Hughes
07766 814425
david.hughes@jcc.co.uk
PE, NR, IP

Luke Smith
07513 120928
luke.smith@jcc.co.uk
CV, MK, NN, WR

Electrical & Allied Distributors Ltd
02890 326822
Northern Ireland and the Republic of Ireland

E&OE. While the Information is considered to be true and correct at the date of publication, changes in product or service after the time of publication may impact on the accuracy of the Information. It remains the responsibility of the installer to ensure products are suitable for their intended application, and meet all relevant regulatory requirements. The product warranty will be void if installed in an area not suitable for the product.



JCC | a LEVITON company

JCC Lighting Products Ltd
Lux Park, Chichester Business Park,
City Fields Way, Tangmere, Chichester,
West Sussex PO20 2FT

Web www.jcc.co.uk
Sales tel 01243 838999
Sales orders sales@jcc.co.uk
Sales fax 01243 838998
Enquiries customer.services@jcc.co.uk

© JCC Lighting Products Ltd 2025

This catalogue has been printed using carbon neutral paper and printing technology.

FSC www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C014531