LuxPanel
ESSENCE




MAIN FEATURES

- Backlit LED technology with slimline 27mm depth
- White aluminium frame with TPb UGR19 compliant diffuser
- Recessed-mounted suitable for use in 15mm or 24mm standard exposed ceiling grids


50K Hours | 3000K WARM WHITE | 4000K NEUTRAL WHITE | 6000K COOL WHITE | L70 B50 | <6 SDCM | TPb Rated | UGR 19 | 5 YEAR Warranty

LUMINOUS INTENSITY

LES66W28L40



LES612W50L40



CAT NO.	TYPE	LUMENS	WATTAGE	EFFICACY (LIm/cW)	SIZE	CCT
LES66W28L40	Fixed Output	2800	25.5W	110	595 x 595mm	4000K
LES66W28D40	Dimmable	2800	25.5W	110	595 x 595mm	4000K
LES66W28L30	Fixed Output	2800	25.5W	110	595 x 595mm	3000K
LES66W28D30	Dimmable	2800	25.5W	110	595 x 595mm	3000K
LES66W28L60	Fixed Output	2800	25.5W	110	595 x 595mm	6000K
LES66W28D60	Dimmable	2800	25.5W	110	595 x 595mm	6000K
LES66W35L40	Fixed Output	3500	32W	110	595 x 595mm	4000K
LES66W35D40	Dimmable	3500	32W	110	595 x 595mm	4000K
LES66W35L30	Fixed Output	3500	32W	110	595 x 595mm	3000K
LES66W35D30	Dimmable	3500	32W	110	595 x 595mm	3000K
LES66W35L60	Fixed Output	3500	32W	110	595 x 595mm	6000K
LES66W35D60	Dimmable	3500	32W	110	595 x 595mm	6000K
LES612W50L40	Fixed Output	5000	45W	110	1195 x 595mm	4000K
LES612W50D40	Dimmable	5000	45W	110	1195 x 595mm	4000K


PRODUCT OPTIONS

DESCRIPTION	EXAMPLE
Self-Test Emergency Pack	**LED3EP1004W**
DALI Addressable Emergency Pack	**LED3EP80DED**

PRODUCT ACCESSORIES


DESCRIPTION	EXAMPLE
600 x 600mm Surface Frame	**EBPSF66W**
1200 x 600mm Surface Frame	**EBPSF612W**
4-point 1.5 metre Suspension Kit	**EBPWSK415**

PRODUCT DRAWING

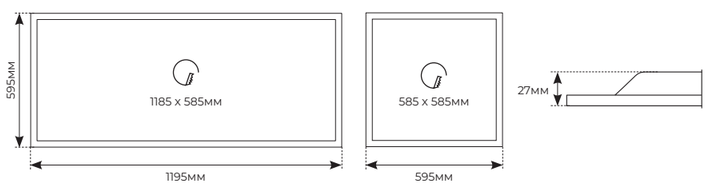

SCAN HERE FOR MORE PRODUCT INFORMATION

Surface Frame
ACCESSORIES

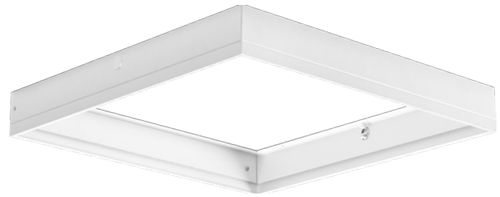





MAIN FEATURES

- Surface mounting frame for Edgelit Framed panels
- Simple on-site assembly
- Space for driver and emergency pack
- Can be surface-mounted or suspended with LWSK415
- Knockouts for conduit entry and emergency LED indicator
- 10mm frame width

CAT NO.	DESCRIPTION	WEIGHT
LPF66W	602 x 602 x 72mm	1.8kg
LPF612W	1202 x 602 x 72mm	2.8kg
LPF312W	1202 x 302 x 72mm	2.4kg

Recessed Frame
ACCESSORIES

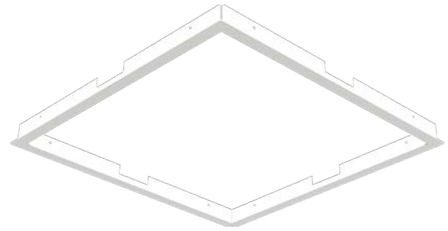

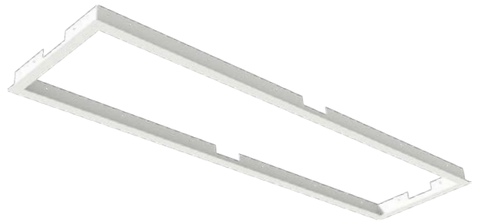

MAIN FEATURES

- For use with Luxpanels
- Suitable for installation into plasterboard ceilings up to 15mm thick
- 25mm frame width

CAT NO.	DESCRIPTION	WEIGHT
LPF66SCRF	595 x 595 x 42mm	1.6kg
LPF312SCRF	1195 x 295 x 42mm	1.6kg
LPF612SCRF	1195 x 595 x 42mm	3.2kg

4-Point Suspension Kit
ACCESSORIES



CAT NO.	DESCRIPTION
EBPWSK415	4-point 1.5 metre wire suspension kit

COMMERCIAL RECESSED