Titan 2.0
HIGHBAY

MAIN FEATURES


- Dust and weatherproof rated high bay with wide optical lens as standard
- Die-cast aluminium housing with choice of 120°, 90° or 60° polycarbonate lens
- Suspended mounting via eye bolt hook supplied
- Supplied with pre-wired weatherproof IP68 electrical connector and 0.3m of rubber cable
- High output emergency of over 900 lumens




IP65 Rating · 50K Hours · 4000K NEUTRAL WHITE · L70 B50 · <6 SDCM · 5 YEAR Warranty

LUMINOUS INTENSITY

LHBT27B22S6040



LHBT27B22S12040




CAT NO.	TYPE	BEAM ANGLE	LUMENS	WATTAGE	EFFICACY (Llm/cW)
LHBT27B15S12040	Fixed Output	120°	14500	100W	145
LHBT27B15S9040	Fixed Output	90°	14500	100W	145
LHBT27B15S6040	Fixed Output	60°	14500	100W	145
LHBT27B15E12040	Emergency	120°	14500	100W	145
LHBT27B15E9040	Emergency	90°	14500	100W	145
LHBT27B15E6040	Emergency	60°	14500	100W	145
LHBT27B22S12040	Fixed Output	120°	22000	150W	147
LHBT27B22S9040	Fixed Output	90°	22000	150W	147
LHBT27B22S6040	Fixed Output	60°	22000	150W	147
LHBT27B22E12040	Emergency	120°	22000	150W	147
LHBT27B22E9040	Emergency	90°	22000	150W	147
LHBT27B22E6040	Emergency	60°	22000	150W	147
LHBT33B29S12040	Fixed Output	120°	29000	200W	145
LHBT33B29S9040	Fixed Output	90°	29000	200W	145
LHBT33B29S6040	Fixed Output	60°	29000	200W	145
LHBT33B29E12040	Emergency	120°	29000	200W	145
LHBT33B29E9040	Emergency	90°	29000	200W	145
LHBT33B29E6040	Emergency	60°	29000	200W	145

PRODUCT DRAWING


LHBT27XX



EMERGENCY



LHBT33XX

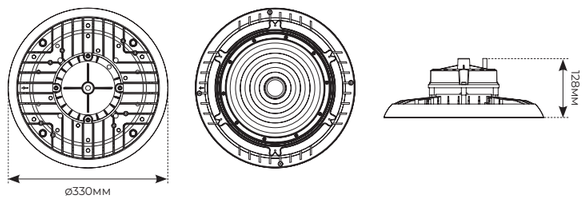

SCAN HERE FOR MORE PRODUCT INFORMATION