SPEC SHEET - H55807Z00UK

Zip HydroTap

Classic Plus with Mixer

FILTERED: BOILING
UNFILTERED: HOT & COLD

The world's most advanced drinking water system, the HydroTap Classic Plus delivers instant filtered boiling water for workplaces of all sizes. From a single tap and under counter command centre, the Classic Plus dispenses only the purest tasting water, filtered to a market-leading 0.2 micron - 25 times more effective than a standard water filter jug. To prioritise user safety, the HydroTap doesn't splash or spit when dispensing water, and features two boiling water safety modes and a cool to touch tap. What's more, the HydroTap features superior technology to conserve water while saving energy and time. Complete with the Arc mixer tap, the Classic Plus also offers unfiltered hot and cold water for washing up.



Actual product may vary slightly depending on functionality.
The image shown is a representation only.

STANDARD



MODEL	MIXED HOT AND COLD	FILTRATION 0.2 MICRON	FONT	CO_2	NOMINAL POWER RATING KW	COMMAND CENTRE DIMENSIONS W X D X H
H55807Z00UK	Y	Y	N	N	1.9 kW @ 230V AC	280mm x 313mm x 333mm

For details of the alternative tap finishes and accessories please see the 'Accessories' section

Features and benefits

Advanced filtration

Maintains existing protective levels of chlorine whilst removing sediment and cysts. This level of filtration includes the removal of dirt, lead, microplastics & 99.9% of microbiological cysts.

Environmentally conscious operation

The HydroTap boasts a range of eco-friendly functionalities, including water conserving air cooling technology, the use of zero-impact refrigerant gas R290 and energy saving sleep modes.

Unique user-safety options

The Zip HydroTap is designed with safety in mind, with boiling isolation, cool touch tap and safety lock features. The boiling point is factory set to 98 degrees celsius, to avoid spluttering steam.

Enhanced hygiene

The 5th generation HydroTap command centre has SteriTouch® embedded throughout the water path. This reduces surface bacteria by 99.99% providing extra protection.

Product detail

Specification type

Product code	H55807Z00UK
Product name	HydroTap G5 Classic Plus with Arc Mixer boiling 240/175 plus hot & cold bright chrome for work

Capacity, weights & dimensions

Water functions	Boiling
Boosted boiling capacity	240 Cups per hour
Unit dimension (W x D x H)	280mm x 313mm x 333mm
Product weight - empty / full	11kg / 14kg

Plumbing

Wholesome water inlet supply required	Cold Feed
Supply pressure range	1.7bar - 5bar
Supply connection (hot & cold)	1 x isolated 1/2"BSP BSP fitting (flexible supply hoses included)
Installation	Must comply with current water supply regulations

The minimum water pressure will vary if a limescale filter is installed. Please contact us to discuss your requirements.

Suitable drainage to trapped waste within 1 metre required for both on font and sink installations.

Electrical

Command centre power rating	1.9 kW @ 230V AC
Booster power rating	2.2 kW @ 230V
Voltage supply	13 amps
Power supply requirements	2 x 13amp socket outlet
Cable length	1.8m fitted with UK standard 3-pin plug
Installation	Must comply with current IEE regulations

Tap design


Style	HydroTap Classic Plus with Mixer
Finish	Bright Chrome
Installation hole cut size	35mm
Rotation	Fixed
Disability options	No
Country of Origin	Australia

Command centre


Factory temperature boiling	98°C
Filtration	0.2 Micron Filter Cartridge
Flow rate (Boiling)	4 l/min
Wholesome water supply requirements	Cold Feed
Tank material	Stainless Steel
Country of origin	Australia

Tap installation

Classic Plus

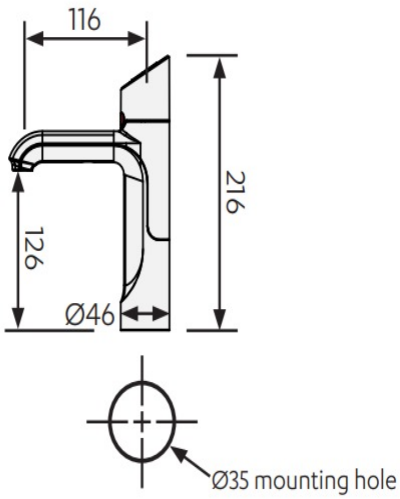



Classic Plus + extension

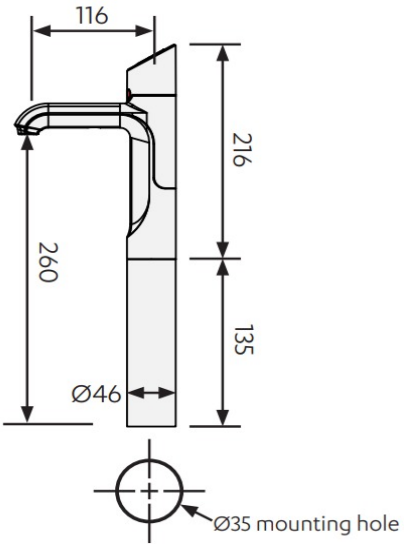


Under-counter unit installation

Clearance space required for under counter unit



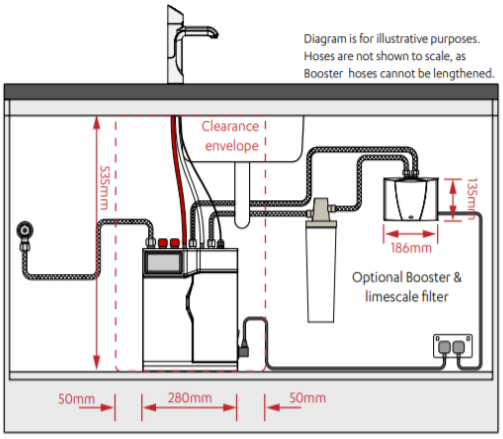

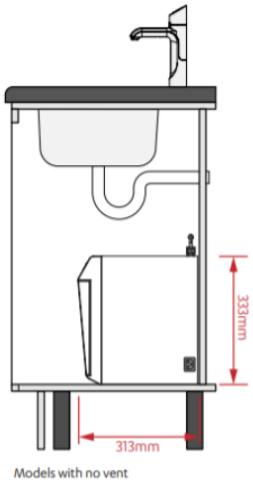

Accessories

Visit specify.zipwater.co.uk to find out more information about Zip HydroTap Classic Plus with Mixer Accessories

Image	SKU	Title
	90915Z00	Integrated Tap Font for HydroTap Classic Plus and Wave Bright Chrome
	95258	Bright chrome G5 raised font kit
	95602	Zip Limescale Filter for Work Light Usage
	95603	Zip Limescale Filter for Work
	95585	Pair of PEX lined hose 3/8" BSPF with 90 C bend on 1 end for limescale filter 95603
	95592	Zip HydroTap G4 & G5 Limescale filter kit for work light usage
	95593	Zip HydroTap G4 & G5 Limescale filter kit for work