


818 CUR/L

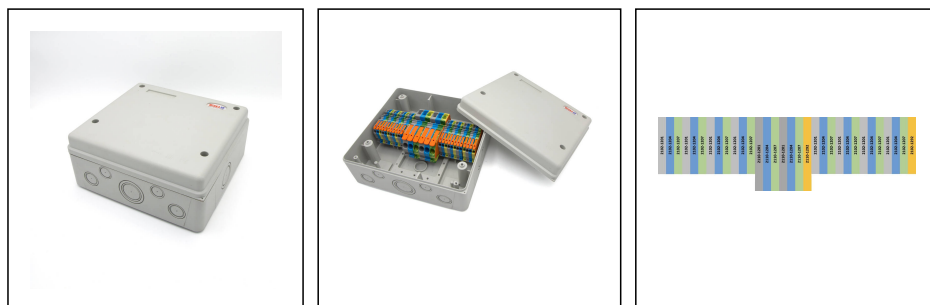

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	Polycarbonate
Protection class	IP65
Temp. range min	-25 °C
Temp. range max	85 °C
Glow wire test	650 °C
Impact resistance	IK08
External dimensions LxWxH	215x200x95mm
Type	818 CUR/L
UK-Number	818 CUR/L
Product Color	RAL 7035
WISKA-Order no.	10111966
Packing unit	1

Description:

Suitable for relocating up to 10 ways*

Fast self-tapping stainless screws

Terminals**

2102-1201 - Grey 2 conductor DIN-rail terminal with Lever and Push-in up to 4mm

2102-1204 - Blue 2 conductor DIN-rail terminal with Lever and Push-in up to 4mm

2102-1207 - Green/Yellow 2 conductor DIN-rail terminal with Lever and Push-in up to 4mm

2102-1292 - Orange Endplate for 2102

2110-1201 - Grey 2 conductor DIN-rail terminal with Lever and Push-in up to 16mm

2110-1204 - Blue 2 conductor DIN-rail terminal with Lever and Push-in up to 16mm

2110-1207 - Green/Yellow 2 conductor DIN-rail terminal with Lever and push-in up to 16mm

2110-1292 - Orange Endplate for 2110

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

***Each Final ring circuit need to be considered as 2 ways**



****We reserve the right to use alternative push-in terminals to the same standard should there be supply issues.**

07.10.2022

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

 +44-12-08816062 ·  +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk