




Kinetic Double Fob Switch

CUL-45740

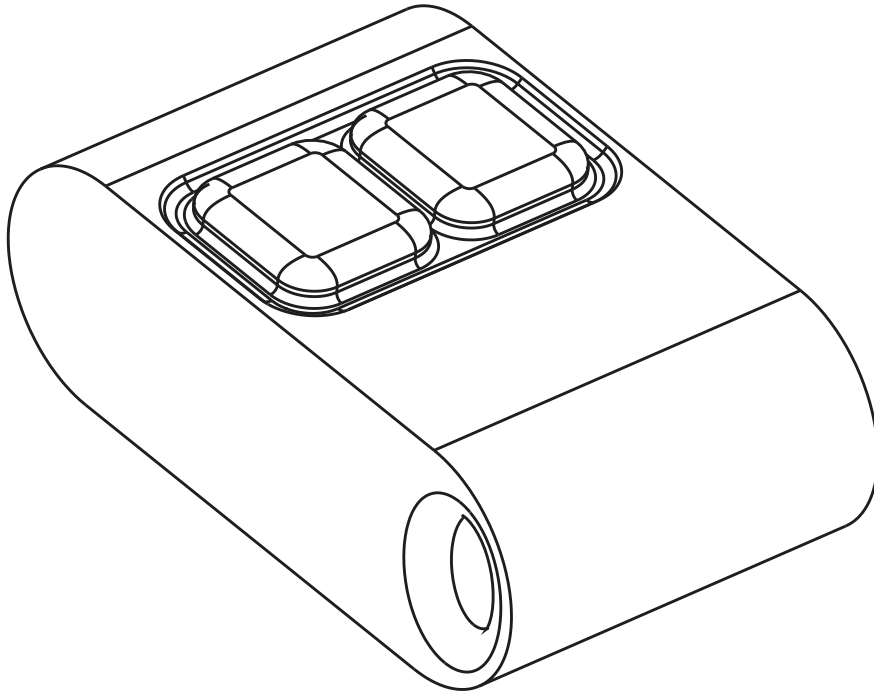

This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)




CHL, GORSE MILL, OL9 9RJ
www.cascadehl.com/#contact


EU Authorised Representative: Authorised Rep Compliance,
Ground Floor, 71 Lower Baggot Street, Dublin, Ireland,
D02P593. www.authorisedrepcompliance.com




A. What is in the box ?



x 1




x 1



x 1

B. Specifications

Dimensions:

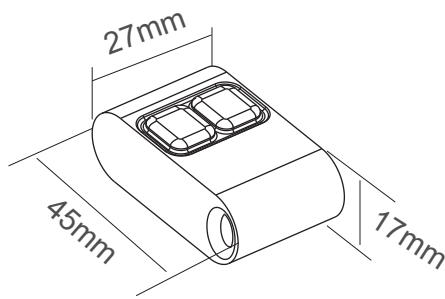

Product Code:

CUL-45740

Power Source:

Self-Powered (Kinetic)

Radio Frequency:

433 Mhz

Switching Type:

Push Switch

Body Material:

Silicone

Dimming Type:

Push Selected

IP Rating:

IP65

Transmission Range:

Outdoor 40m (no barrier)


Indoor 15m (plaster board; drywall)

Indoor 8m (concrete, glass walls)




F. Pairing


1. For RF Pairing

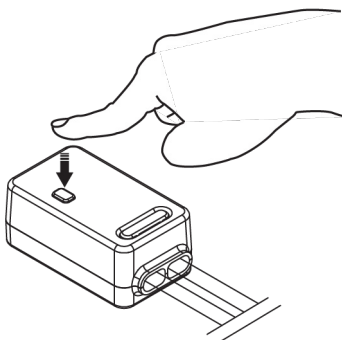

Press the Pairing Key for 3-4s, until the RED indicator flashes slowly.

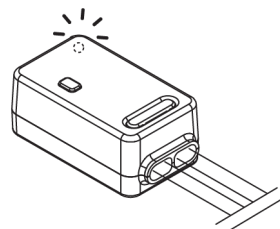

While the indicator on receiver flashes, press the Kinetic Fob switch ONCE to complete the pairing.

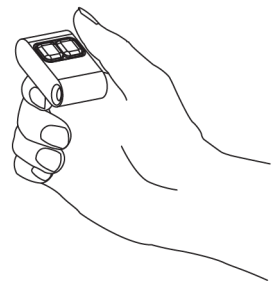

⚠ Each switch can operate separately (On/Off). Each Switch could pair with individual receiver.

⚠ When pairing to a dimmable receiver, the first paired key is recognized as on-off, the other key is automatically recognized as a dimmer key.