

## GLASS PATCH DOOR CLOSERS

# GP.35

Similar to the GP.3 door closer, the GP.35 Hydraulic Glass Patch Closer is commonly used in situations where floor spring

closers are not an option due to underfloor heating and services. The difference with the GP.35 is the power size, in that it is power adjustable size EN3-5. Glass thickness can vary from 10-15mm, and a non-hold open mechanism is available.

- Power adjustable size EN3-5
- Universal application
- Available in Satin Stainless finish



Opening Angle  
130°



Two-Stage  
Speed Regulation



Guarantee



Max Door  
Width



Max Door  
Weight



## Finishes

See page 98 for more detail





SSS  
Satin Stainless



## Product Features

## GP.35

|                                |                      |
|--------------------------------|----------------------|
| Delayed Action                 | -                    |
| Back Check                     | -                    |
| Opening Angle                  | 130°                 |
| Max Door Width                 | 1250mm               |
| Max Door Weight                | <100kg               |
| Power Adjustment               | By Spring            |
| Hold Open                      | o                    |
| Dimensions (including cover)   | W186.5 x H71 x D40mm |
| Key: ✓ Yes    - No    o Option |                      |

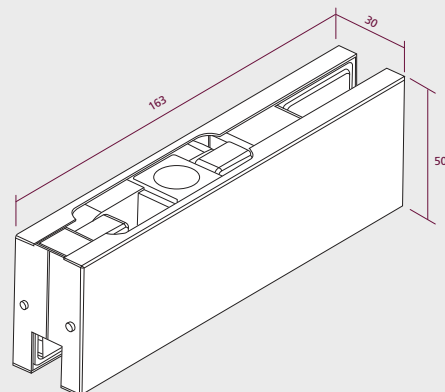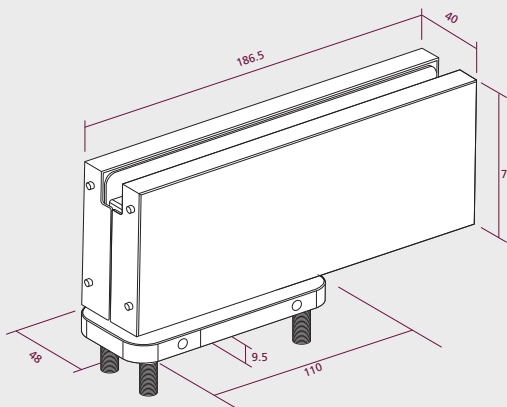

For fitting instructions see website

All dimensions shown are in mm.