

CONCEALED HEEL CLOSERS

ITS.H3 – Heel Closer

The Rutland concealed Heel Closer requires no cut-out in the floor or frame of the door and can be used in doors of minimum thickness 40mm.

Key Features:

- Available with ‘Hold-open’ or ‘non-hold-open’
- Fixed power size 3
- Adjustable closing and latching speed



Opening Angle
150°



Two-Stage
Speed Regulation




Guarantee



Max Door
Width



Max Door
Weight

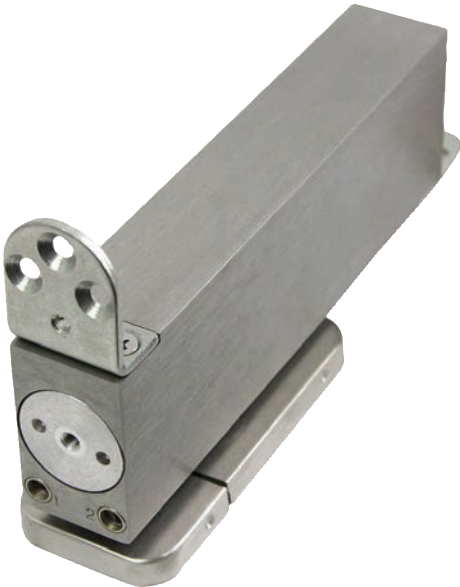


Product Features	ITS.H3 – Heel Closer
Hold Open	o
Opening Angle	150°
Max Door Width	1000mm
Max Door Weight	<100kg
Power Adjustment	By Spring
Hold Open (not for fire doors)	90°
Dimensions	W181 x H93 x D32mm
Key: ✓ Yes - No o Option	

Finishes

See page 148 for more detail



SE
Silver

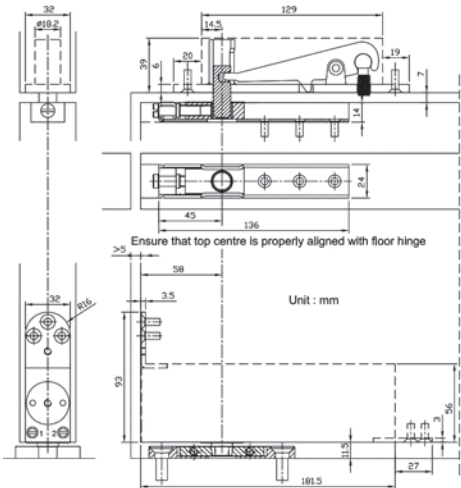

Components

ITS.H3	EN Size	Finish	Re-order Code	Product Code	Box Qty
 Hold Open Concealed Floor Spring Pivot c/w SS Cover and Top Pivot	3	Stainless Steel	12515	ITS.H3.HO.SS	10
Non-Hold Open Concealed Floor Spring Pivot c/w SS Cover and Top Pivot	3	Stainless Steel	12516	ITS.H3.NHO.SS	10

