

ELECTROMAGNETIC DOOR CLOSERS

TS.FIRETRAK.115

The TS.FIRETRAK.115 Electromagnetic Slide Arm Closer is a surface mounted Electromagnetic hold-open slide arm with cam action door closer designed for fire and smoke compartmentation doors. Fire and smoke doors will operate in a controlled close with the TS.FIRETRAK.115 when the fire alarm is activated.

- Universal Application
- Power Adjustable by spring, size 2-5
- Available in Silver or Satin Nickel for next day delivery



3rd Party
Certification



Opening Angle
130°



Two-Stage
Speed Regulation



Guarantee



Max Door
Width



Max Door
Weight



Finishes

See page 98 for more detail



SE
Silver



SNP
Satin Nickel





1812

Product Features

TS.FIRETRAK.115

Delayed Action	-
Back Check	-
Opening Angle	130°
Door Width	600-1250mm
BS8300 Min Door Width	857mm
Max Door Weight	<110kg
Power Adjustment	By Spring
Hold Open	✓
Dimensions (including cover)	W254 x H68 x D43mm
Certification Compliance	
Certifire	-
UKCA	-
CE	✓
BS EN 1154	✓
BS EN 1155	✓
BS EN 1634	✓
UL10C	-
UL228	-
ANSI BHMA	-
IFCC	✓
Key: ✓ Yes - No ◦ Option	

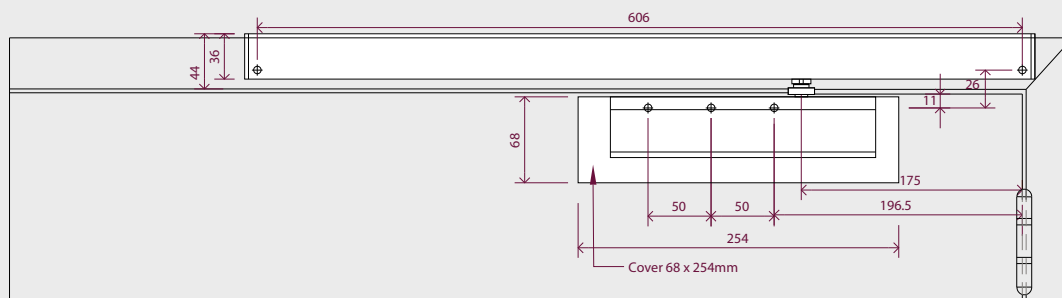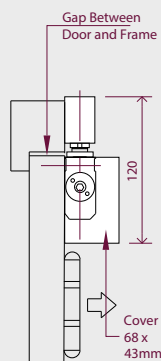

For fitting instructions see website

All dimensions shown are in mm.